

'COMBI CM

# HOW DO YOU MAKE THE BEST BETTER?


**MiNT.**

HUSTLER MACHINERY  
INNOVATION &  
NEW TECHNOLOGY

With more than four decades of innovation behind it, stands to reason Hustler's latest CM livestock feeders are impressive. It's the brand you know and love redesigned for today's farmer.

## Features

- 1 Joystick control comes standard.
  - 2 Reliably feed out any type, shape and size without jamming, or plugging up.
  - 3 Gearbox drives the cross floor and rear floor reduce maintenance and downtime and provide more power to shift even heavier loads.
  - 4 Feedpad elevator design now comes as standard equipment to eliminate feed dropping between the cross floor and elevator.
  - 5 Massive reduction in working parts, and components and the introduction of bearings to replace bushings, can slash your daily start ups times.
  - 6 The compact design and improved draw bar improves manoeuvrability making life easier for operators in tight lanes and gateways.
  - 7 Industry leading ground clearance.
  - 8 Scale ready for Hustler's new Feedlink Bluetooth scale system for more control over proof-of-placement and feed management.
  - 9 Toughest chains and bars on the market, we've gone to 12,000lb roller chain on all floors instead of link chain for improved reliability and less maintenance..
- + Feedpad spilling retention kit standard.
  - + Gearbox drives on all floors.
  - + Strongest 65x35 box section bolt on bars on X floor and rear floor.
  - + Covered shafts and proven steel floors last the life of the machine.
  - + All drives running on bearings.
  - + Scale ready which weighs when on the jack and attached to the tractor.
  - + Bolt on mudguards, access platforms and ladder standard.
  - + Central greasing on axle and difficult to reach bearings.
  - + Toughest axle design with massive 2,200cm<sup>2</sup> of pivot surface area.
  - + Simplified loadcell integration for easier retro fitment of scales.
  - + Elevator stands up vertical for more compact transport mode.
  - + Lower maintenance front and rear elevator spill retainers as standard.
  - + Guarding and covers for hydraulic valves.

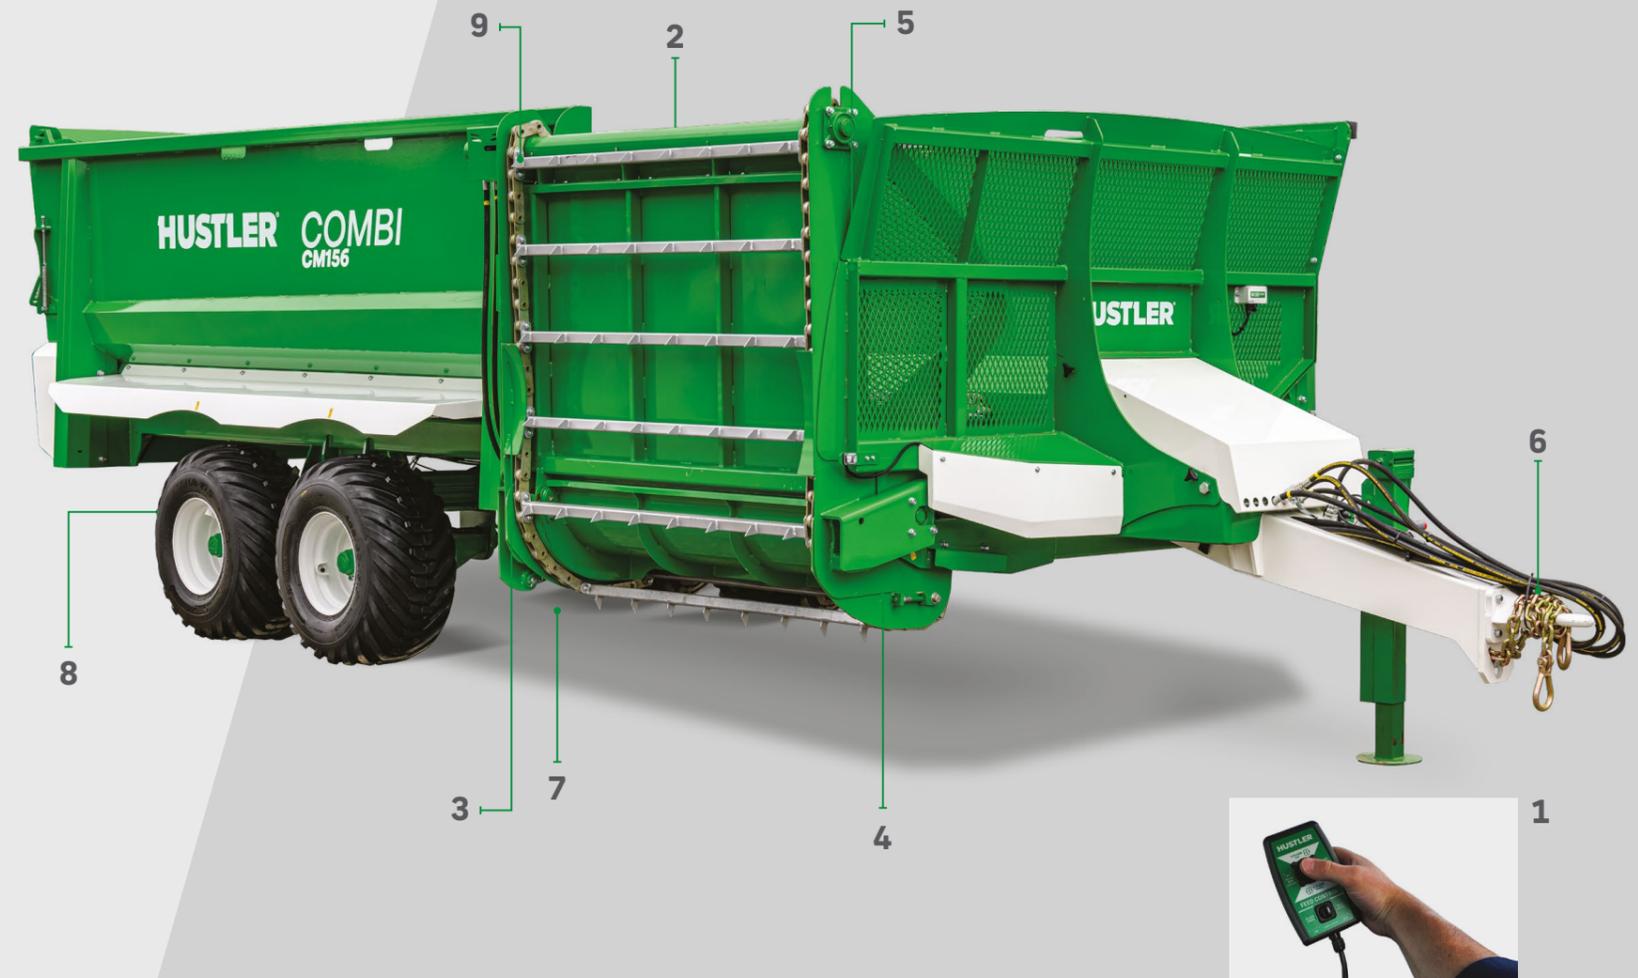

## Options

- + Feedlink wireless scale and feed management system
- + Hydraulic 2 wheel brakes
- + Hydraulic 4 wheel brakes
- + Road ready kit (includes safety chains, LED lights, and front and rear Hazard panels)
- + Load sensing control with 3 remotes in lieu of joystick control (recommended for silage feeding only)
- + Feed Control joystick and switch between bales and silage modes

## Models in Range

- + **Combi CM116** 11.2m<sup>3</sup> combination feeder, 8 ton load rating, 400/60R15.5 wheels
- + **Combi CM156** 15m<sup>3</sup> combination feeder, 10 ton load rating, 400/60R15.5 wheels
- + **Combi CM196** 19.4m<sup>3</sup> combination feeder, 15 ton load rating, 550/45R22.5 wheels

**HUSTLER**<sup>®</sup>

0800 487 853 | [hustlerequipment.com](http://hustlerequipment.com)





	COMBI CM116	COMBI CM156	COMBI CM196
Capacity load level	11.2m <sup>3</sup>	15.0m <sup>3</sup>	19.4m <sup>3</sup>
Capacity heaped	14m <sup>3</sup>	18.5m <sup>3</sup>	24m <sup>3</sup>
Load capacity	8 Ton Rated	10 Ton Rated	15 Ton Rated
Round bales	3-6	4-8	6-12
Square bales (Up to 7' Long)	3-4	5-6	7-8
Square bales (8' Long)	1-2	2-4	3-6
Bin width	2290mm	2290mm	2290mm
Bin length	4250mm	5775mm	7590mm
Side height	1145mm	1145mm	1145mm
Loading height	2150mm	2150mm	2250mm
Overall width	2720mm	2720mm	2990mm
Overall length	6385mm	7920mm	9730mm
Overall height	2300mm	2300mm	2300mm
Tare weight	3590kg	4210kg	4950kg
Wheels / Tyres	400/60R15.5	400/60R15.5	550/45R22.5



