

RCF36 SERIES DUAL SPINDLE ROTARY CUTTERS

HP REQUIRED
40-130 HP

CUTTING CAPACITY
3"

HITCH
Cat. 1, 2 & 3

CUTTERS




Bigger and better.

The RCF36 Series are heavy-duty dual spindle cutters with a 3" cut capacity. This rotary cutter is made for pasture maintenance, roadside mowing, and land clearing in reclamation projects. The 210 HP gearboxes are protected from damage by the slip clutch on the main driveline and impact absorbing flex couplers on the connecting drivelines. The features on this unit add up to a bigger, better cutter.

- Single or dual tires
- 3 Tire options
- 3 Axle options

5 YEAR
LIMITED GEARBOX
WARRANTY

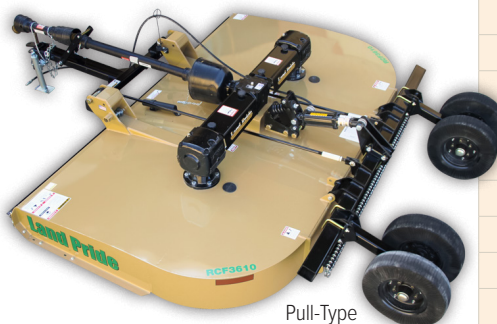

RCFM4014

Land Pride offers a three spindle extra heavy duty RCFM4014 for row crop shredding. Visit www.landpride.com for complete specifications.

	RCF3696	RCF3610
Horsepower	3-Pt: 50-130 HP Semi: 40-130 HP Pull: 50-130 HP	3-Pt: 60-130 HP Semi & Pull: 50-130 HP
Hitch	Cat. 1 & 2 QH	Cat 2 & 3 QH
Working Width (cm)	8' (244)	10' (305)
Overall Width	8'7"	10'6-1/2"
Overall Length (3-Pt w/Rigid Axle & Chains)	8'10"	10'2"
Weight - lb (kg) (3-Pt w/Rigid Axle & Chains)	1,838 (834)	2,310 (1048)
Cutting Height	2" - 12"	
Cutting Capacity	3" Diameter	
Deck Thickness	10 Gauge	
Deck Height	13"	
Side Thickness	1/4"	
Safety Guards (Choose)	Front: Rubber, Chain or Double Chain Rear: Rubber, Chain or Double Chain	
Skids	Replaceable	
Blades	1/2" x 4" Heat Treated Alloy Steel Free Swinging Blades	
Blade Tip Speed	540: 17,100 fpm; 1000: 17,400 fpm	540: 17,100 fpm; 1000: 17,400 fpm
Dishpan	3/16" Round, Dish Shaped	
Gearbox Rating[^]	Outboard: 210 HP, Center 210 HP	
Gearbox	540 RPM or 1,000 RPM	
Driveline	3-Point & Semi-Mount: Cat. 4 Pull-Type: Cat. 4 Equal Angle or CV	
Driveline Protection	Slip Clutch and Impact Absorbing Cross Shafts to Outer Gearboxes	
Tailwheels	3-Point & Semi-Mount: 15" or 21" Laminated Pull-Type: 21" Laminated, 24" Foam Filled or 29" Aircraft Tires	
Colors		

Quick Hitch
SYSTEM