
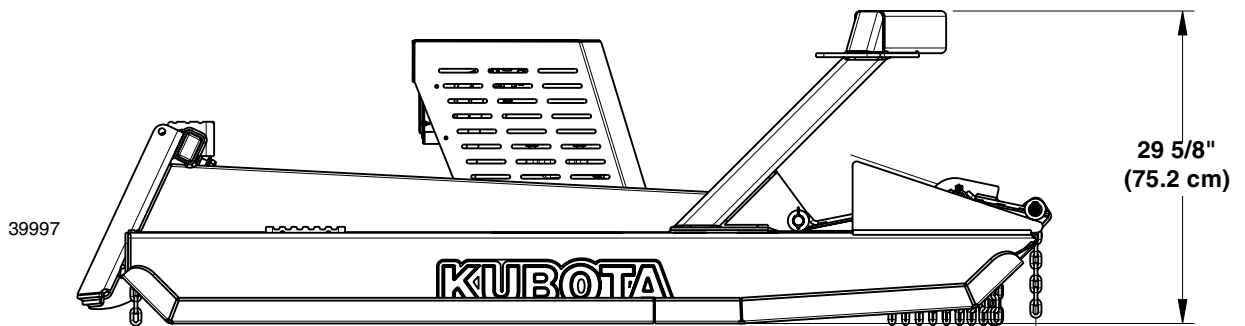


### SC7072 Skid Cutter

#### Specifications & Capacities

Specifications & Capacities		
Cutter weight with skid shoes	lbs (kg)	2580 (1170.3)
Hitch		Welded on
Cutting width	in (m)	73 1/2 (1.87)
Overall width	in (m)	84 3/8 (2.15)
Overall length	in (m)	92 1/4 (2.34)
Cutting height	in (cm)	1 1/2 (3.8) to 18 (45.7) infinitely variable.
Cutting capacity	in (cm)	7 (17.8) Diameter
Spindle hub oil capacity	oz (kg)	85 (2.41)
Spindle hub oil		EP 80-90 wt. gearlube
High volume drive motor	gpm (Lpm)	26-43 (98.4-162.8) flow
Hydraulic pressure	psi (mPa)	Up to 3500 (24.1)
Deck thickness	in (mm)	1/4 (6)
Side skirt construction	in (mm)	1/4 (6) Steel
Deck wear protection		Four, corner-mounted skid shoes
Skid shoe construction	in (mm)	3/8 (10) plate
Blade carrier	in (mm)	(2) Round 1/2 (13) plate weldments
Blade size	in (mm)	3/4 (19) double edge
Blade rotation		Clockwise
Blade bolt		3/4-10 Grade 8
blade tip speed	fpm (mps)	14870 (75.5) at 43 gpm (162.8 Lpm)
Front deck protection		Bi-fold door with single row chain guard
Rear deck protection		Single row chain guard
Deck lift height protection		Height adjustment safety chain
Mulching teeth	in (mm)	3/4 (19) SQ carbide
Optional protective door material & assembly weight	lbs (kg)	Clear polycarbonate shield 10 lbs (4.5)

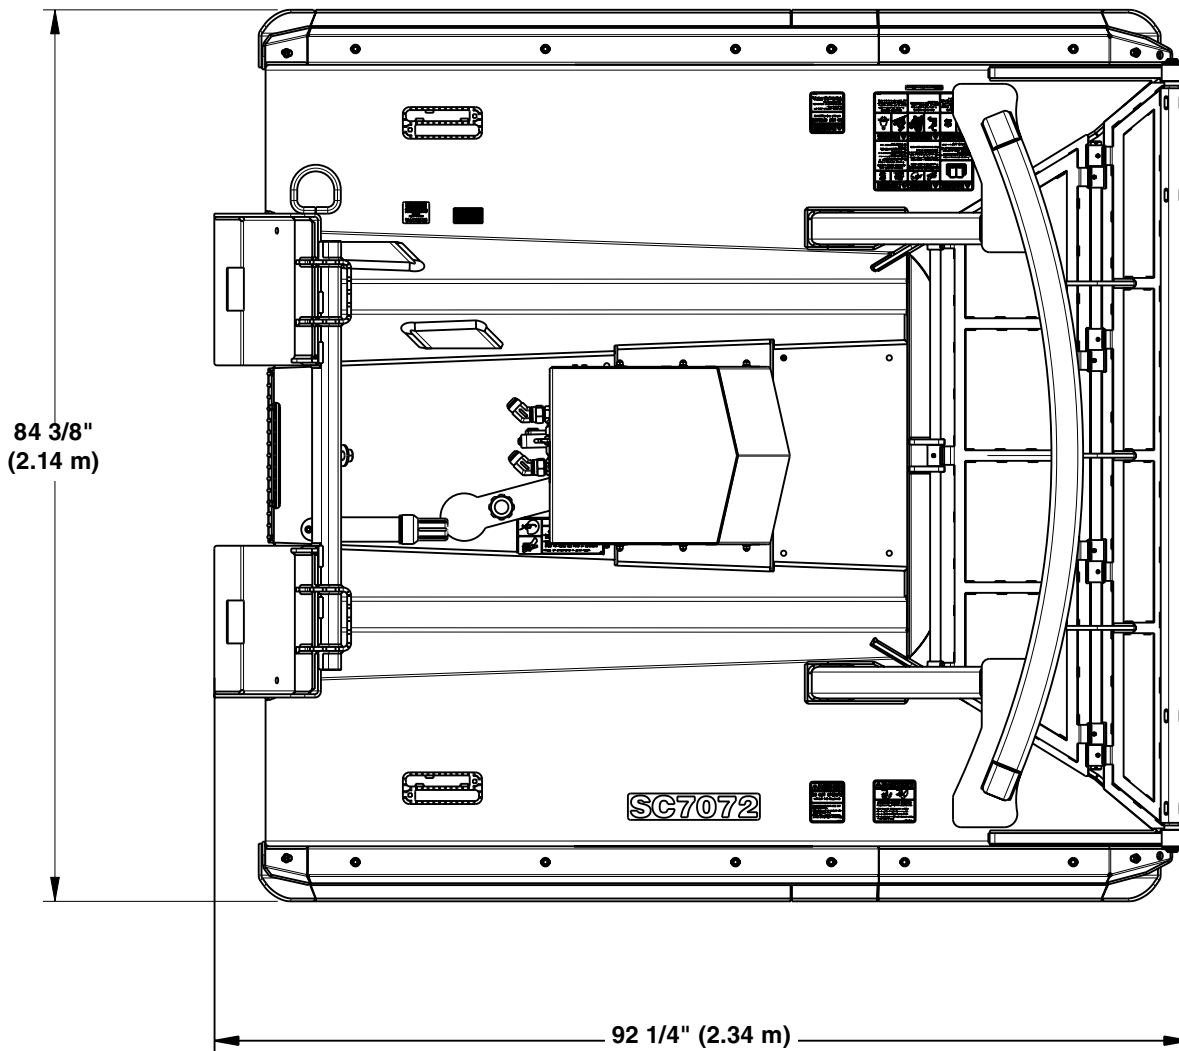

70415