



FOLDING & OFFSET

## ROTARY CUTTERS

10', 12', 14', 15' & 20' Models



**LP** CONSISTENTLY LEADING THE WAY...



# QUALITY CUTTERS FROM LAND PRIDE



## 10', 12', 14', 15', 20' Cutters

At Land Pride, we have earned the reputation of standing behind our products. We know how important it is for contractors and fleet managers to feel confident in purchasing products that are reliable and to know that our support is available when assistance is needed.

Land Pride Rotary Cutters have been engineered with input from contractors, municipalities, counties, and DOT fleet managers. Serviceability enhancements have made our latest series of folding cutters very owner-friendly. Many of these enhancements were proposed by Departments of Transportation and contractors looking for an easier way. These enhancements improve the ability of owners and operators to properly maintain the cutter, in less time with better results.

Being efficient with minimal downtime is important for operators, even more so for operators of multi-unit fleets. Land Pride spent many hours with these fleet owners to understand the challenges they face to get jobs done on time. Likewise, their shops want to minimize maintenance while not compromising the cutters. Land Pride listened and now offers some of the most easily maintained rotary cutters on the market.

Land Pride Rotary Cutters are in use on roadsides, cropland, airports, horse farms, and set-aside acres across the US & Canada. Full specifications for all of our medium and heavy-duty rotary cutters can be found on page 18. Additional features and benefits can also be found at [www.landpride.com](http://www.landpride.com).



Land Pride, A Division of Great Plains Mfg., Inc., has been a leader in grounds maintenance equipment throughout North America since 1986. Today Land Pride is a leading U.S. manufacturer of tractor mounted implements and skid steer attachments.



Models may or may not include options. Design and specifications subject to change without notice. See dealer for complete warranty information.







# 12' & 15' GRASS MAINTENANCE, UTILITY EASEMENTS



Land Pride's RC2512 is designed for smaller horsepower tractors and smaller acres. This 12' Rotary Cutter is packed with many features found in our larger folding cutters and the 12' width, tight turning radius, and low tongue weight makes this an ideal rotary cutter for compact tractor owners that need a performance cutter for farm grass maintenance.

Land owners that need an economy grass cutter should look to Land Pride's RC2515. We've packaged our renowned quality and dependability into this medium-duty 15' Rotary Cutter. With a 1 year hitch-to-tailwheel warranty, plus a 5 year gearbox warranty, the RC2515 will give you years of dependable service and acres and acres of cut grass.

## RC2512, RC2515, RC3712

**5 YEAR**  
LIMITED GEARBOX  
WARRANTY\*



RC3712

The Heavy-Duty RC3712 Folding Rotary Cutter expands on the popularity of the RC2512. It features a 3" cutting capacity with a cut height of 1.5" to 14". This 12-footer is designed for tractors in the 50 to 160 HP range in either 540 or 1000 RPM. The RC3712 is at home maintaining utility easements, clearing for pipelines, or cutting narrow right-of-ways, making them a valuable tool for contractors, utility cooperatives, and government maintenance agencies.

RC3712






RC2512




Wings are leveled with easy-to-access and easy-to-adjust turnbuckles. Dual leveling rods enable the cutter to pull equally on the rear axle during travel over rough terrain.



Beveled skid shoes on wings reduce gouging of the ground when turning.



A center spring on the cylinder cushions load on drawbar and provides a smooth ride in rough terrain.



All three connecting drivelines offer two-plate slip clutch protection.



Low hitch weight on tractor drawbar is ideal for smaller horsepower tractors. Narrow A-frame hitch allows for tighter turns.



3/16" Thick stump jumper protects the gearbox output shaft.



# 15' PASTURE MAINTENANCE



Land Pride's RC3715 is a heavy-duty 15-foot Rotary Cutter that excels in grasses and small saplings up to 3" in diameter on farms and conservation areas. This cutter is designed for 50 to 160 HP tractors and requires two sets of hydraulic remotes. The flat deck allows for easy cleaning and offers a variety of wheel options to fit the user's needs.

## RC3715



The 5-year gearbox warranty and ease-of-maintenance features reduce ownership costs.



RC3715 Narrow transport width for ease of transport.






RC3715



Beveled skid shoes on wings reduces gouging of the ground when turning.




Color coded hydraulic hose handles allow for easy identification and the sturdy handles aide with easy connect/disconnect from the tractor.



Continuous cast steel greaseable hinges and 1" solid hinge rods allow the cutter to follow rough ground, alleviating uneven cutting.



Patented sliding center shield offers ease-of maintenance for slip-clutches and U-joints.



Optional deck rings on the RC3715 are available to keep blades from damaging the deck.



Drain holes allow water to drain from the wheel rims when wings are folded up, preventing paint deterioration and rusting.



# 15' | ROADSIDES & HIGHWAY MAINTENANCE



**RC4715, RC5715, RCB5715**

*“...we could run these  
5 years and not see  
any major problems.  
...really good parts  
service – 24 to 36  
hours and our parts  
are here.”*

C.J. Rose  
District II County Commissioner  
Beaver County, OK

Land Pride Rotary Cutters are employed in highway maintenance operations across the U.S. and Canada. From heavy-duty to extra-heavy-duty models, Land Pride manufactures three 15-foot models that meet the needs of contractors and government agencies.

Grass and small saplings up to 4" are managed well by the RC47 Series – 10 ga. single deck – or the RC57 Series – 10 ga. over 7 ga. double-deck. The RCB57 Series is at home in extreme roadside mowing operations. It features double decks and heavy-duty gearboxes that are able to tackle small trees up to 5", and many features specified by DOTs and counties. See detailed specs on pages 18 and 19.

These models all have maintenance features that make them good investments and our parts availability make these models even better. Parts availability limits downtime, while quality components and workmanship supports longevity. And should the need arise, the RC47, RC57, and RCB57 feature a 7-year limited gearbox warranty and 1-year warranty on the overall unit and driveline, parts and labor.




**RC4715**





RC5715

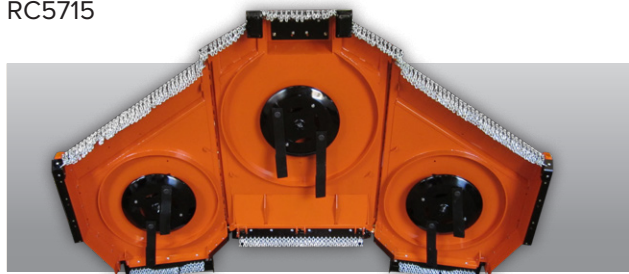

Optional fully welded deck rings keep blades from damaging the deck.

The heavy-duty dishpan is spin balanced for smooth operation.

**7 YEAR**  
LIMITED GEARBOX  
WARRANTY



Patented Deck Armor™ is an additional layer of steel which increases durability reducing the possibility of deck damage from blade to deck contact without reducing cut quality.



An optional tool box complete with locking lid (padlock supplied by customer) and support mount for mounting above the center deck lift cylinder is available for the RCB57.



The patented convenient aluminum flip spacers on the RC4715 speed height adjustment and eliminate the need for donut-style spacers.



Land Pride's patented parallel pivot axle gives you unmatched ground contact for improved holding power on hills and inclines (RC4715 only).



# 20' | AIRPORTS, ROADSIDES, AND OPEN AREAS



**RC3620, RC4620, RC5020**

Wide open spaces such as airports, pastures or watershed areas are no match for Land Pride's 20-foot models. The RC36 and RC46 both feature a 20' cutting width and cutting height from as low as 2" or up to 12" depending on tire selection. The RC36 cuts grass, weeds, and light brush up to 2" in diameter, while the RC46 and RC50 have a cutting capacity up to 3" in diameter, making them well suited for varied applications.

Features that make maintenance fast and efficient are standard equipment on all 20-foot models. Slip clutches and grease zerks are easily accessible. For ease of cleaning, all 3 models have smooth-top decks to allow grass and debris to be swept away. Gearboxes feature a 7-Year Limited Warranty. The main drivelines are Cat. 6 Constant Velocity, wing drivelines are Cat. 5 (Cat. 4 on RC36).

The wing decks float independently, and follow the contour of the land leaving a nicely cut surface. Various safety guard choices make these an excellent cutter for state and municipal mowing applications. RC36 and RC46 feature rephasing cylinders on the axles, eliminating mechanical linkage and allows for shorter axles which in turn leads to less weight on the tractor drawbar. Other options include tire types and quantities.

Outer wing wheels can be single or dual. Duals are ideal when mowing in areas where one wing needs to flex uphill. The outer wheel rides up the embankment and keeps the deck from gouging. Wheel spindles are bolt-in to allow easy change out.



**RC4620**





RC5020


Deck height of 10-1/2" - 14" (depending on model) aides in material flow while cutting, which disperses grass evenly.




Rephasing lift cylinders allow cutter to be leveled using hydraulic cylinders versus mechanical turnbuckles.



The RC4620 and RC5020 feature a diamond blade carrier that handles most cutting conditions and leaves a cleaner cut.



The RC3620 dishpan option assists the blade carrier in passing over obstructions that could damage the blade carrier and gearbox output shaft.



The optional LP Performance Hitch is self-leveling and swivels up and down, and rotates side-to-side for uneven terrain.



Protect your tractor's instant on/off PTO clutch with an optional Cat. 6 CV driveline with over-running clutch.



# OFFSET | FOR DITCHES, ROADSIDES



**RC4710, RC5710, RCB5710,  
RC3614, RC4614, RC5014**

All of Land Pride's Offset Rotary Cutters are single wing mowers designed and built specifically for roadside mowing. On all models, the left-hand wing is replaced with a weight box that allows the operator to safely travel with the flow of traffic next to the road's shoulder remaining on more level ground. All the features you love from our Folding Rotary Cutters are there too, in either a 10-foot or 14-foot single wing model!

The RC3614, RC4614, and RC5014 are single wing versions of our 20-foot models. The RC4710 and RC5710 are 10' models of our heavy-duty 15' models, while the RCB5710 is extra-heavy-duty. The cut width is reduced but all other specs are identical from cut capacity to cut height. All six models carry 7-year gearbox warranties, 1-year overall warranty, and the rugged dependability that Land Pride Rotary Cutters are known for.



Our 1" thick extra-heavy-duty dishpan plate adds superior strength to our dishpan.

**7 YEAR**  
LIMITED GEARBOX  
WARRANTY



RC5710





RC5014

The RC3614, RC4614, and RC5014 are Land Pride's largest offset folding rotary cutters. They make quick work of roadsides 14-feet at a time! These cutters feature a Cat 6 CV driveline, gearboxes rated up to 250 HP depending on model, and high blade tip speeds for a clean, uniform cut in most highway mowing applications.

10-1/2" Deck height handles heavy cutting, which reduces balling-up of cut material under the deck.

**7 YEAR**  
LIMITED GEARBOX  
WARRANTY



Skid shoes are reversible and replaceable - located on each side of the center section, the wing, and the weight box.



1" Solid hinge rods and greaseable wing hinges provide years of dependable service.



Choice of used aircraft tires, with or without foam, or laminated tires, in various sizes are available.



# 12' & 15' GALVANIZED COATING



**RCG3712, RCG3715, RCG4715**

All Land Pride 7-Series Cutters are available with a galvanized coating. These galvanized models are identical to their painted counterparts in options and specifications, with one glaring difference – the corrosion resistant coating that now rests where the paint used to! In fact, the durability of our RCG units is backed up by a 10-year Deck Rust-Through Warranty.

Land Pride's hot-dipped galvanized coating is applied by dipping fabricated steel cutter decks into a kettle containing molten zinc. While the decks are in the kettle, the iron in the steel reacts with the molten zinc to form a tightly-bonded alloy coating that offers corrosion protection to the steel deck and will add durability to our already durable cutters as well as provide a tough, rust-resistant coating.



**RCG3715**

For corrosive environments, our galvanized coating adds another option to make Land Pride cutters some of the best in the industry. The dipping process used in applying the galvanized coating insures an even coating across all surfaces.



**RCG3715**





RCG3715

**10 YEAR**  
RUST THROUGH  
DECK  
WARRANTY\*

The durability of our RCG units is backed up by a 10-Year Rust-Through Deck Warranty.

**5 YEAR**  
LIMITED GEARBOX  
WARRANTY\*

**3 GALVANIZED  
MODELS  
AVAILABLE**



Individual wheel spindles can be replaced when damaged without replacing the entire axle assembly.



Grease zerks on end caps of intermediate and wing drivelines provide ease of maintenance.



Hot-dipped zinc galvanized deck offers durable rust protection for harsh conditions and corrosive environments.



The RCG Series galvanized models are identical to their painted RC counterparts in options and specifications. See pages 18-19 for full specifications.




# FEATURES AND HITCHES

All features are not available on all cutters.



Additional hitch options:

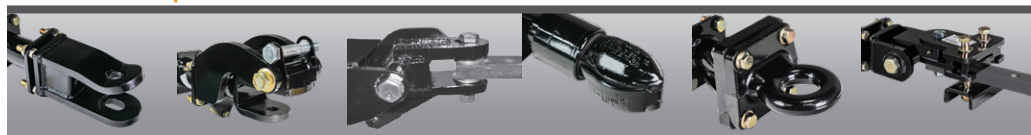

Swivel Clevis

LP Performance

Self-Leveling

Ball

Pintle

Bar-Tite™ Clevis







Safety lighting




Patented  
Parallel  
Pivot™ axle

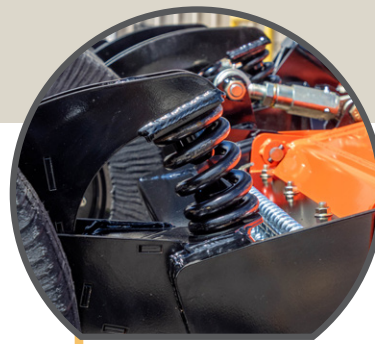

Independent  
spring  
suspension  
(optional)

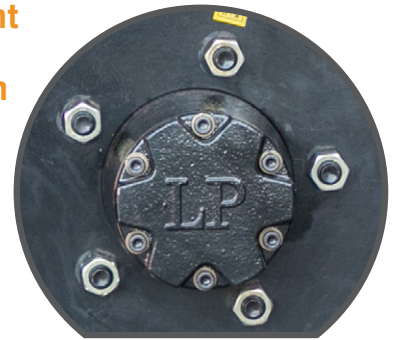


Dust cap protector  
with larger bearings  
& 5 lip hub seals

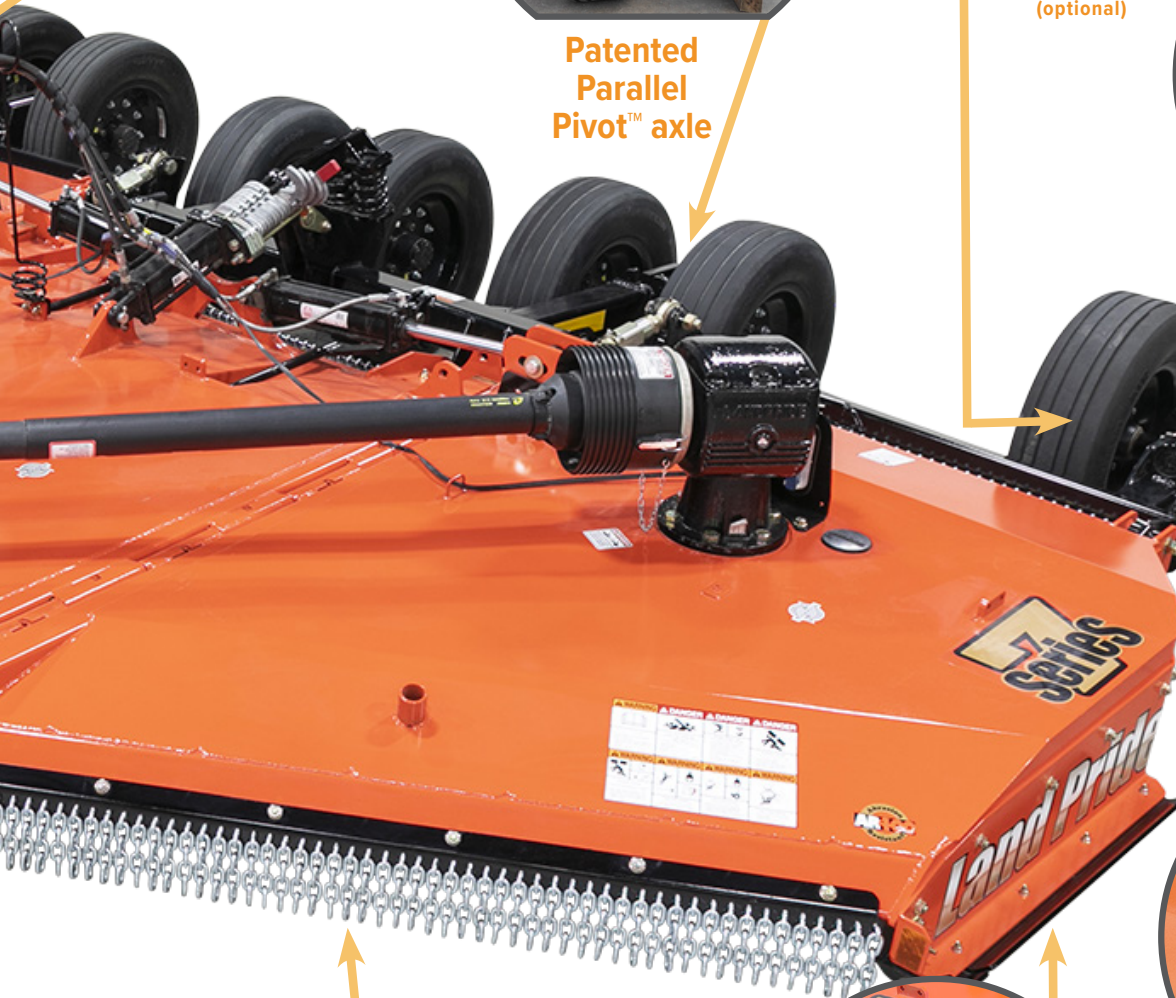

Forged blade bar





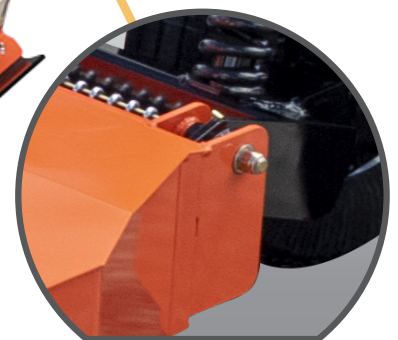







Replaceable  
side skirts;  
Beveled skid shoe













Maintenance free  
pivot points on axle  
& tongue



|  |                    | MEDIUM-DUTY   |   |   | HEAVY-DUTY  |   |
|--|--------------------|---|---|---|---|---|
|  |                    | RC2512  | RC2515  | RC3620  | RC(G)3712   | RC(G)3715   |
| <b>Horsepower</b>                                    |                    | 40-100 HP   | 50-100 HP   | 70-160 HP   | 50-160 HP   | 50-160 HP   |
| <b>Hitch</b>   |                    | Pull-Type;<br>Standard Clevis,<br>LP Performance Self-Leveling                      | Pull-Type;<br>Self Leveling Hitch & Clevis  | Pull-Type;<br>Standard Clevis,<br>LP Performance Self-Leveling,<br>Pintle, Ball, Bar-Tite | Pull-Type;<br>Standard Swivel Clevis,<br>LP Performance Self-Leveling,<br>Ball, Pintle, or Bar-Tite Hitch | Pull-Type;<br>Standard Swivel Clevis,<br>LP Performance Self-Leveling,<br>Ball, Pintle, or Bar-Tite Hitch |
| <b>Working Width (cm)</b>                            |                    | 12' (366)   | 15' (457)   | 20' (607)   | 12' (366)   | 15' (457)   |
| <b>Overall Width</b>                                 |                    | 12'7"   | 15'7"   | 20' 10"   | 12'10"  | 15'10"  |
| <b>Min. Transport Width</b>                          |                    | 7'11"   | 8'4"  | 9' 11"  | 9' 4"   | 7'3"  |
| <b>Overall Length</b>                                |                    | 13'3"   | 15'6"   | 17' 6"  | 15'3"   | 16'3"   |
| <b>Machine Weight - lb (kg)</b>                      |                    | 2,540 (1152)  | 3,202 (1,452)   | 6,680 (3,030)   | 3,730 (6,192)   | 4,380 (1,987)   |
| <b>Cutting Height</b>                                |                    | 1-1/2" - 12"  | 2" - 13"  | 2" - 12" **   | 1-1/2" - 14" **   | 1-1/2" - 16" **   |
| <b>Cutting Capacity</b>                              |                    | 1-1/2" Diameter   | 1-1/2" Diameter   | 2" Diameter   | 3" Diameter   | 3" Diameter   |
| <b>Tongue Weight - lb</b>                            |                    | 793   | 1,022   | 1,750   | 1,240   | 1,594   |
| <b>Max. Turning Angle</b>                            |                    | 80° with CV   | 80° with CV   | 80° with CV   | 80° with CV   | 80° with CV   |
| <b>Deck Height</b>                                   |                    | 11"   | 11-1/4"   | 13"   | 11"   | 12"   |
| <b>Deck Thickness</b>                                |                    | 10 Gauge  | 10 Gauge  | 10 Gauge  | 10 Gauge  | 10 Gauge  |
| <b>Suspension</b>                                    |                    | Spring on Center Deck   | Spring on Center Deck   | Spring on Center Deck   | Spring Cushioned Center Axle  | Spring Cushioned Center Axle  |
| <b>Deck Rings</b>                                    |                    | N/A   | N/A   | Optional  | N/A   | Optional  |
| <b>Side Panel Thickness</b>                          |                    | 3/16"   | 1/4"  | 1/4"  | 1/4"  | 1/4"  |
| <b>Chain Guards<br/>Front &amp; Rear</b>             |                    | Standard  | Standard  | Double Optional   | Double Optional   | Double Optional   |
| <b>Skid Shoes</b>                                    |                    | Wings & Center,<br>Replaceable  | Wings & Center,<br>Replaceable  | Wings & Center,<br>Replaceable  | Wings & Center,<br>Replaceable, Beveled   | Wings & Center,<br>Replaceable, Beveled   |
| <b>Blades</b>  |                    | 1/2" x 3" Uplift  | 1/2" x 4" Uplift  | 1/2" x 4" High Lift   | 1/2" x 4" Uplift  | 1/2" x 4" Uplift  |
| <b>Blade Bolt</b>                                    |                    | Keyed with Hardened<br>Flatwasher & Lock Nut  | Keyed with Hardened<br>Flatwasher & Lock Nut  | Keyed with Hardened<br>Flatwasher & Lock Nut  | Keyed with Hardened<br>Flatwasher & Lock Nut  | Keyed with Hardened<br>Flatwasher & Lock Nut  |
| <b>Blade Tip<br/>Speed<br/>(Feet per<br/>minute)</b> | <b>540 Center</b>  | 16,500 fpm,   | 15,000 fpm  | 16,000 fpm  | 15,514 fpm  | 15,268 fpm  |
|  | <b>Wings</b>       | 16,000 fpm  | 15,000 fpm  | 16,000 fpm  | 15,474 fpm  | 15,000 fpm  |
|  | <b>1000 Center</b> | -   | -   | 16,500 fpm  | 15,700 fpm  | 15,768 fpm  |
|  | <b>Wings</b>       | -   | -   | 16,500 fpm  | 15,707 fpm  | 14,620 fpm  |
| <b>Blade Overlap</b>                                 |                    | 6"  | 6"  | 6"  | 6"  | 6"  |
| <b>Dishpan</b>                                       |                    | 10 Gauge, Round, Dish Shaped<br>with 1" x 3-1/2" Blade Bar                          | 10 Gauge, Round, Dish Shaped<br>with 1" x 4" Blade Bar                              | 10 Gauge Round, Dish Shaped<br>w/ 1" x 4-1/2" Blade Bar                                   | 10 Gauge Round, Dish Shaped<br>w/ 1" x 4-1/2" Blade Bar   | 3/16" Round, Dish Shaped,<br>1" x 4" Blade Bar  |
| <b>Hydraulics</b>                                    | <b>Wings</b>       | 2" x 8"   | 2-1/2" x 10"  | 3" x 12"  | 2-1/2" x 12"  | 2-1/2" x 12"  |
|  | <b>Center</b>      | 2-1/2" x 8"   | 2-1/2" x 8"   | Rephasing Cylinders   | 3" x 8"   | 3" x 8"   |
| <b>Gearbox Rating<sup>A</sup></b>                    |                    | 540 RPM: 160 HP Divider;<br>100 HP Center & Wings                                   | 540 RPM: 160 HP Divider;<br>100 HP Center & Wings                                   | 540 or 1000 RPM:<br>250 HP Divider, 150 HP Ctr &<br>Wings                                 | 540 or 1000 RPM:<br>160 HP Divider;<br>130 HP Center & Wings  | 540 or 1000 RPM:<br>160 HP Divider;<br>130 HP Center & Wings  |
| <b>Gearbox Output Shaft</b>                          |                    | 1-1/2"  | 1-5/8"  | 2"  | 2"  | 2"  |
| <b>Gearbox Input Shaft</b>                           |                    | 1-3/8" 6 Spline   | 1-3/8" 6 Spline   | 1-3/4" 20 Spline  | 1-3/4" 20 Spline  | 1-3/4" 20 Spline  |
| <b>Input Driveline</b>                               |                    | Cat. 4 CV   | Cat. 4 CV   | Cat. 6 CV   | Cat. 6 CV   | Cat. 6 CV   |
| <b>Connecting Drivelines</b>                         |                    | Cat. 3 Slip-Clutch  | Cat. 3 Slip-Clutch  | Cat. 4 Slip-Clutch  | Cat. 4 Slip-Clutch  | Cat. 4 Slip-Clutch  |
| <b>Tires</b>   |                    | 21" Laminated Tires<br>20.5" Aircraft Tires   | 21" Laminated Tires<br>29" Aircraft Tires   | 21" Laminated<br>29" Used Aircraft<br>27" Foam-Filled                                     | 21" or 26" Laminated<br>25.5" Aircraft<br>or 24" Foam-Filled  | 21" or 26" Laminated<br>29" Used Aircraft<br>25.5" Aircraft or 24" Foam-Filled                            |
| <b>Transport Lights</b>                              |                    | Standard  | Standard  | Standard  | Standard  | Standard  |
| <b>Color Options</b>                                 |                    |  |  |        |                      |                      |
| <b>Limited Gearbox Warranty<sup>A</sup></b>          |                    |  |  |        |                      |                      |



|  |                    | HEAVY-DUTY  |   |   |   | EXTRA HEAVY-DUTY   |
|--|--------------------|---|---|---|---|--|
|  |                    | RC(G)4715   | RC5715  | RC4620  | RC5020  | RCB5715  |
| <b>Horsepower</b>                                    |                    | 50-250 HP   | 50-250 HP   | 70-250 HP   | 90-250 HP   | 50-250 HP  |
| <b>Hitch</b>   |                    | Pull-Type;<br>Standard Swivel Clevis,<br>LP Performance Self-Leveling,<br>Ball, Pintle, or Bar-Tite Hitch | Pull-Type;<br>Constant Level Swivel Clevis,<br>LP Performance Self-Leveling,<br>Ball, Pintle, Bar-Tite    | Pull-Type;<br>Standard Clevis,<br>LP Performance Self-Leveling,<br>Pintle, Ball, Bar-Tite | Pull-Type;<br>Standard Clevis,<br>Swivel, Ball,<br>Pintle, or Bar-Tite Hitch          | Pull-Type;<br>Constant Level Swivel Clevis,<br>LP Performance Self-Leveling,<br>Ball, Pintle, Bar-Tite |
| <b>Working Width (cm)</b>                            |                    | 15' (457)   | 15' (457)   | 20' (607)   | 20' (607)   | 15' (457)  |
| <b>Overall Width</b>                                 |                    | 15' 10"   | 16'   | 20' 10"   | 20' 9-1/2"  | 16'  |
| <b>Min. Transport Width</b>                          |                    | 7' 3"   | 7' 3"   | 9' 11"  | 8' 9"   | 7' 3"  |
| <b>Overall Length</b>                                |                    | 16'3"   | 16'3"   | 17' 6"  | 19' 3"  | 16'3"  |
| <b>Machine Weight - lb (kg)</b>                      |                    | 5,000 (2,268)   | 5,446 (2,470)   | 6,540 (2,966)   | 6,528 (2,961)   | 5,746 (2,606)  |
| <b>Cutting Height</b>                                |                    | 1-1/2" - 16" **   | 1-1/2" - 16" **   | 2" - 12" **   | 2" - 14" **   | 1-1/2" - 16" **  |
| <b>Cutting Capacity</b>                              |                    | 4" Diameter   | 5" Diameter   | 3" Diameter   | 3" Diameter   | 5" Diameter  |
| <b>Tongue Weight - lb</b>                            |                    | 1,860   | 2,200   | 2,160   | 2,300   | 2,200  |
| <b>Max. Turning Angle</b>                            |                    | 80° with CV   | 80° with CV   | 80° with CV   | 80° with CV   | 80° with CV  |
| <b>Deck Height</b>                                   |                    | 12"   | 12"   | 13"   | 10-1/2"   | 12"  |
| <b>Deck Thickness</b>                                |                    | 10 Gauge  | 7 Gauge Bottom; 10 Gauge Top  | 10 Gauge  | 10 Gauge  | 7 Gauge Bottom, 10 Gauge Top   |
| <b>Suspension</b>                                    |                    | Spring Cushioned Center Axle  | Various Options   | Spring Cushioned Center Axle  | Spring Cushioned Center Axle  | Various Options  |
| <b>Deck Rings</b>                                    |                    | Optional  | Deck Rings or<br>DeckArmor™ Optional  | Optional  | Optional  | Deck Rings or<br>DeckArmor™ Optional   |
| <b>Side Panel Thickness</b>                          |                    | 1/4"  | 1/4" Replaceable  | 1/4"  | 1/4"  | 1/4" Replaceable   |
| <b>Chain Guards<br/>Front &amp; Rear</b>             |                    | Double Optional   | Double Optional   | Double Optional   | Double Optional   | Double Optional  |
| <b>Skid Shoes</b>                                    |                    | Wings and Center,<br>Replaceable, Beveled   | AR400 Wings, Center,<br>Replaceable, Beveled  | Wings and Center,<br>Replaceable, Beveled   | Wings and Center,<br>Reversible, Replaceable, Beveled                                 | AR400 Wings, Center,<br>Replaceable, Beveled   |
| <b>Blades</b>  |                    | 1/2" x 4" Uplift  | 1/2" x 4" Uplift  | 1/2" x 4" High Lift   | 1/2" x 4" High Lift   | 1/2" x 4" Uplift   |
| <b>Blade Bolt</b>                                    |                    | Keyed with Hardened<br>Flatwasher & Lock Nut  | Keyed with Hardened<br>Flatwasher & Lock Nut  | Keyed with Hardened<br>Flatwasher & Lock Nut  | Keyed with Hardened<br>Flatwasher & Lock Nut  | Keyed with Hardened<br>Flatwasher & Lock Nut   |
| <b>Blade Tip<br/>Speed<br/>(Feet per<br/>minute)</b> | <b>540 Center</b>  | 16,300 fpm  | 16,400 fpm  | 17,000 fpm  | 17,377 fpm  | 16,400 fpm   |
|  | <b>Wings</b>       | 16,300 fpm  | 16,400 fpm  | 17,000 fpm  | 17,329 fpm  | 16,400 fpm   |
|  | <b>1000 Center</b> | 16,300 fpm  | 16,400 fpm  | 18,000 fpm  | 18,165 fpm  | 16,400 fpm   |
|  | <b>Wings</b>       | 16,000 fpm  | 16,000 fpm  | 18,000 fpm  | 18,317 fpm  | 16,000 fpm   |
| <b>Blade Overlap</b>                                 |                    | 6"  | 6"  | 6"  | 6"  | 6"   |
| <b>Dishpan</b>                                       |                    | Forged Diamond Blade Bar;<br>Optional 3/16" Round Dishpan   | Forged Diamond Blade Bar;<br>Optional 3/16" Round Bolt-on<br>Dishpan, Optional HD Blade Bar<br>& Dishpans | 1" Plate Diamond Blade Bar;<br>Optional 3/16" Round Dishpan                               | 1" Plate Diamond Blade Bar;<br>Optional 3/16" Round Dishpan                           | Forged Diamond Blade Bar;<br>Optional 3/16" Round Bolt-on Dishpan,<br>Optional HD Blade Bar & Dishpans |
| <b>Hydraulics</b>                                    | <b>Wings</b>       | 2-1/2" x 12"  | 3" x 8"   | 3" x 12"  | 3-1/2" x 12"  | 3" x 8"  |
|  | <b>Center</b>      | 3" x 8"   | 3-1/2" x 8"   | Rephasing Cylinders   | 4" x 8"   | Rephasing Cylinders  |
| <b>Gearbox Rating<sup>^</sup></b>                    |                    | 540 or 1000 RPM:<br>250 HP Divider,<br>210 HP Center & Wings  | 540 or 1000 RPM:<br>250 HP Divider,<br>225 HP Center & Wings  | 540 or 1000 RPM:<br>250 HP Splitter,<br>210 HP Center & Wings                             | 540 or 1000 RPM:<br>250 HP Divider,<br>225 HP Center & Wings                          | 540 or 1000 RPM:<br>250 HP Divider,<br>225 HP Center & Wings   |
| <b>Gearbox Output Shaft</b>                          |                    | 2-3/8"  | 3"  | 2-3/8"  | 2-3/8"  | 3"   |
| <b>Gearbox Input Shaft</b>                           |                    | 1-3/4" 20 Spline  | 1-3/8" or 1-3/4" 20 Spline  | 1-3/4" 20 Spline  | 1-3/4" 20 Spline  | 1-3/8" or 1-3/4" 20 Spline   |
| <b>Input Driveline</b>                               |                    | Cat. 6 CV   | Cat. 6 CV   | Cat. 6 CV   | Cat. 6 CV   | Cat. 6 CV  |
| <b>Connecting Drivelines</b>                         |                    | Cat. 4 or Cat. 5 Slip-Clutch  | Cat. 4 or Cat. 5 Slip-Clutch  | Cat. 5 Slip-Clutch  | Cat. 5 Slip-Clutch  | Cat. 4 or Cat. 5 Slip-Clutch   |
| <b>Tires</b>   |                    | 21" or 26" Laminated<br>29" Used Aircraft<br>24" Foam-Filled  | 21" or 26" Laminated<br>29" Used Aircraft<br>25.5" Foam-Filled  | 21" Laminated<br>29" Used Aircraft<br>27" Foam-Filled                                     | 21" Laminated<br>29" Used Aircraft<br>27" Foam-Filled                                 | 21" or 26" Laminated<br>29" Used Aircraft<br>25.5" Foam-Filled   |
| <b>Transport Lights</b>                              |                    | Standard  | Standard  | Standard  | Standard  | Standard   |
| <b>Color Options</b>                                 |                    |                        |                        |        |  |                   |
| <b>Limited<br/>Gearbox Warranty*</b>                 |                    |                        |                        |        |  |                   |

\*See dealer for complete warranty information. \*\*Varies by tire options. ^Based on field performance.







A Division of Great Plains Mfg., Inc.  
1525 E. North St. • P.O. Box 5060  
Salina, Kansas 67401  
Visit our dealer locator at [landpride.com](http://landpride.com)

## Over **500** Products To Fit Your Lifestyle

All-Flex Mowers • All-Purpose Seeders • Arena Graders • Bale Spears • Box Scrapers • Compact Drills  
Core Aerators • Disc Harrows • Ditchers • Drag Harrows • Drag Scrapers • Fertilizer Spreaders  
Field Cultivators • Flail Mowers • Food Plot Seeders • Grading Scrapers • Grapples • Grooming Mowers  
Hydraulic Reservoir Kits • Landscape Rakes • Moldboard Plows • No-Till Seeders • Overseeders • Pallet Forks  
Pasture Aerators • Post Hole Diggers • Powered Rakes • Primary Seeders • Quick-Hitches • Rear Blades  
Ripper Shanks • Rotary Cutters • Rotary Tillers • Scarifiers • Seed Bed Rollers • Snow Blowers • Snow Pushers  
Snow Trip Blades • Soil Pulverizers • Spike Tooth Harrows • Straw Crimpers • Wood Chippers