

RC46 SERIES OFFSET/FOLDING ROTARY CUTTERS

HP REQUIRED
70-250 HP

CUTTING CAPACITY
3"

HITCH
Pull-Type




	RC4614	RC4620 HEAVY DUTY
Horsepower	70-250 HP	
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite	
Working Width (cm)	13'6" (439)	20' (607)
Overall Width	14' 9-1/2"	20' 10"
Min. Transport Width	9' 2-3/4"	9' 11"
Overall Length	17' 8-1/2"	17' 6" with Laminated Tires
Machine Weight - lb (kg)	6,125 (2,778)	6,540 (2,966)
Cutting Height *	2" - 12"	
Cutting Capacity	3" Diameter	
Tongue Weight - lb	2,220	2,160
Max. Turning Angle	80° with CV	
Deck Height	13"	
Deck Thickness	10 Gauge	
Suspension	Spring Cushioned Center Axle	
Deck Rings	Optional	
Side Thickness	1/4"	
Chain Guards Front & Rear	Single - Standard Double - Optional	
Skid Shoes	Wings and Center, Replaceable, Beveled	
Blades	1/2" x 4" High Lift	
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut	
Blade Tip Speed (Feet per minute)	540 Center	17,000 fpm
	Wings	17,000 fpm
	1000 Center	18,000 fpm
	Wings	18,000 fpm
Blade Overlap	6"	
Blade Bar	1" Thick, Standard	
Dishpan	1" Plate Diamond Blade Bar; Optional 3/16" Round Dishpan	
Hydraulics	Wings	3" x 12"
	Center	Rephasing Cylinders
Gearbox	540 RPM or 1000 RPM: 250 HP Splitter, 210 HP Center & Wing(s)	
Gearbox Output Shaft	2-3/8"	
Gearbox Input Shaft	1-3/4" 20 Spline	
Input Driveline	Cat. 6 CV	
Connecting Drivelines	Cat. 5 Slip Clutch	
Tires 6 or 8	21" Laminated, 29" Used Aircraft, or 27" Foam-Filled	
Transport Lights	Standard	
Colors		

CUTTERS

At home in wide open spaces.

Right of ways, roadsides, pastures, open areas, and row crop fields are all candidates for the RC4620. It handles brush up to 3" in diameter, features a 7-year gearbox warranty, and has blade tip speeds up to 18,000 fpm. Rephasing axles allow for shorter axles which in turn leads to less weight on the tractor drawbar. The 46 Series features a diamond blade bar with an optional bolt-on stump jumper. Decks feature 1/4" side skirts and smooth-top, 10 gauge decks.

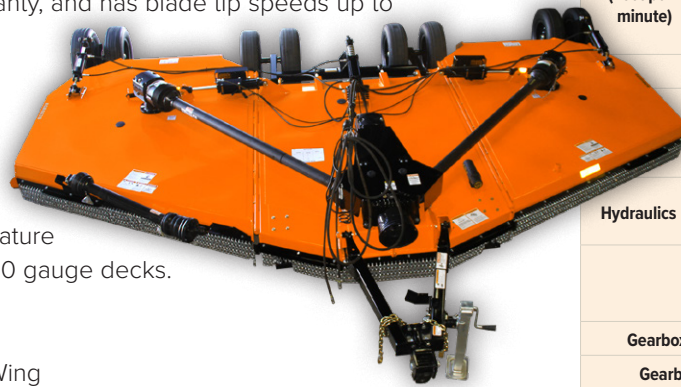

- Smooth-top, 10 Gauge Decks
- Replaceable and Reversible Wing and Center Deck Skid Shoes
- Single or Double Chain Guarding
- Hydraulic Rephasing Cylinders on Axle
- Shorter Axle for Lower Drawbar Weight
- Available Land Pride Performance Hitch
- Optional Fully-Welded Deck Rings



Diamond blade bar protects the gearbox seal and gearbox output shaft in tough conditions. Optional bolt-on stump jumper provides extra protection against stumps and other protrusions.

*Maximum cut height is dependent on tire options selected.

