

# RC5020-2 20' FOLDING ROTARY CUTTERS

HP REQUIRED  
90-250 HP

CUTTING CAPACITY  
3"

HITCH  
Pull-Type




		RC5020-2 HEAVY DUTY
<b>Horsepower</b>		90-250 HP
<b>Hitch</b>		Pull-Type; Standard Clevis, Swivel, Ball, Pintle, or Bar-Tite Hitch
<b>Working Width (cm)</b>		20' (607)
<b>Overall Width</b>		20' 9-1/2"
<b>Min. Transport Width</b>		8' 9"
<b>Overall Length</b>		19' 3"
<b>Machine Weight - lb (kg)</b>		6,528 (2,961)
<b>Cutting Height *</b>		2" - 14"
<b>Cutting Capacity</b>		3" Diameter
<b>Tongue Weight - lb</b>		2,300
<b>Max. Turning Angle</b>		80° with CV
<b>Deck Thickness</b>		10 Gauge
<b>Deck Height</b>		10-1/2"
<b>Suspension</b>		Spring Cushioned Center Axle
<b>Deck Rings</b>		Optional
<b>Side Thickness</b>		1/4"
<b>Chain Guards Front &amp; Rear</b>		Single - Standard Double - Optional
<b>Skid Shoes</b>		Wings and Center, Reversible, Replaceable, Beveled
<b>Blades</b>		1/2" x 4" High Lift
<b>Blade Bolt</b>		Keyed with Hardened Flatwasher & Lock Nut
<b>Blade Tip Speed (Feet per minute)</b>	<b>540 Center</b>	17,377 fpm
	<b>Wings</b>	17,329 fpm
	<b>1000 Center</b>	18,165 fpm
	<b>Wings</b>	18,317 fpm
<b>Blade Overlap</b>		6"
<b>Dishpan</b>		1" Plate Diamond Blade Bar; Optional 3/16" Round Dishpan
<b>Baffle Kit</b>		Optional - Rear
<b>Hydraulics</b>	<b>Wings</b>	3-1/2" x 12"
	<b>Center</b>	4" x 8"
<b>Gearbox Rating<sup>^</sup></b>		540 RPM or 1000 RPM; 250 HP Divider, 225 HP Center & Wings
<b>Gearbox Output Shaft</b>		2-3/8"
<b>Gearbox Input Shaft</b>		1-3/4" 20 Spline
<b>Input Driveline</b>		Cat. 6 CV
<b>Connecting Drivelines</b>		Cat. 5 Slip Clutch
<b>Tires 6 or 8</b>		21" Laminated, 29" Used Aircraft, or 27" Foam-Filled
<b>Transport Lights</b>		Standard
<b>Colors</b>		

CUTTERS

## Be more productive, 20' at a time.

Roadsides, pastures, set-aside acres and crop residue are perfect jobs for this 20' cutter. Wing decks float independently, and follow the contour of the land leaving an even cut. The 20' cutting width, 2" to 14" cutting height and ability to cut weeds and brush up to 3" in diameter make the RC5020 well suited for varied applications. Various safety guard choices make these an excellent choice for state and municipal mowing applications. An optional baffle and shredder kit with adjustable spacing is available for crop shredding.

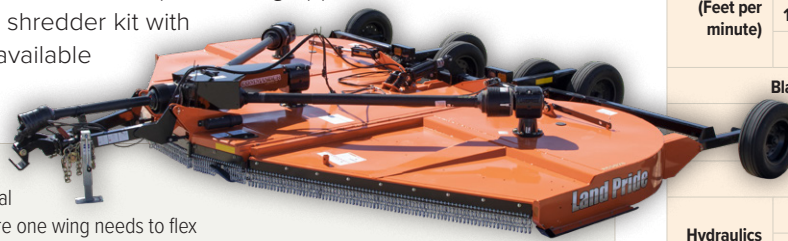

Outer wing wheels can be single or dual. Duals are ideal when mowing in areas where one wing needs to flex uphill. The outer wheel rides up the embankment and keeps the deck from gouging. Wheel spindles are bolt-in to allow easy change out.



The optional LP Performance Hitch is self-leveling and swivels up and down, and rotates side to side for uneven terrain.



The diamond blade carrier handles most cutting conditions and leaves a cleaner cut.



The dishpan option assists the blade carrier in passing over obstructions that could damage the blade carrier.

\*See dealer for complete warranty information. ^Based on field performance.