


# Rotary Cutters

RCD1884

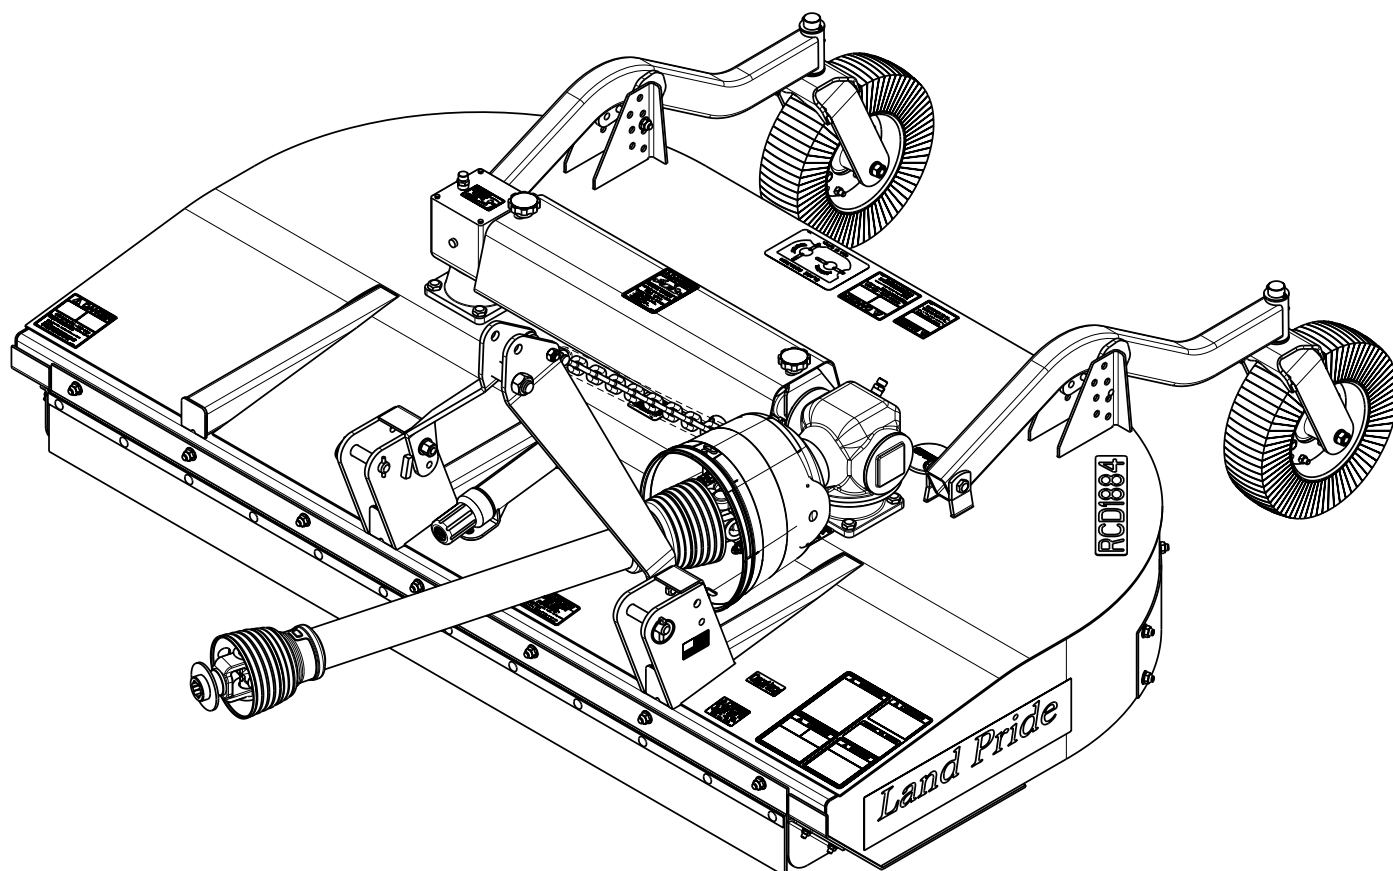

30965

## 326-355M Operator's Manual



Read the Operator's Manual entirely. When you see this symbol, the subsequent instructions and warnings are serious - follow without exception. Your life and the lives of others depend on it!

*Cover photo may show optional equipment not supplied with standard unit.*

*For an Operator's Manual and Decal Kit in French Language, please see your Land Pride dealer.*



## Machine Identification

Record your machine details in the log below. If you replace this manual, be sure to transfer this information to the new manual.

If you, or the dealer, have added Options not originally ordered with the machine, or removed Options that were originally ordered, the weights and measurements are no longer accurate for your machine. Update the record by adding the machine weight and measurements provided in the Specifications & Capacities Section of this manual with the Option(s) weight and measurements.

<b>Model Number</b>	
<b>Serial Number</b>	
<b>Machine Height</b>	
<b>Machine Length</b>	
<b>Machine Width</b>	
<b>Machine Weight</b>	
<b>Delivery Date</b>	
<b>First Operation</b>	
<b>Accessories</b>	 <hr/> <hr/> <hr/>

## Dealer Contact Information


**Name:** \_\_\_\_\_

**Street:** \_\_\_\_\_

**City/State:** \_\_\_\_\_

**Telephone:** \_\_\_\_\_

**Email:** \_\_\_\_\_

	<b>California Proposition 65</b> WARNING: Cancer and reproductive harm - <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
---	--

<b>Important Safety Information</b> . . . . .	<b>1</b>	<b>Section 4: Operating Instructions</b> . . . . .	<b>22</b>
Safety at All Times . . . . .	1	Operating Checklist . . . . .	22
Look For The Safety Alert Symbol . . . . .	1	Safety Information . . . . .	22
Safety Labels . . . . .	6	Inspection of Tractor & Cutter . . . . .	23
<b>Introduction:</b> . . . . .	<b>10</b>	Transporting . . . . .	23
Application . . . . .	10	Blade Engagement & Disengagement . . . . .	24
Using This Manual . . . . .	10	Blade Engagement . . . . .	24
Terminology: . . . . .	10	Blade Disengagement . . . . .	24
Definitions: . . . . .	10	Field Operation . . . . .	24
Owner Assistance . . . . .	10	Unhook Rotary Cutter . . . . .	25
Serial Number . . . . .	10	General Operating Instructions . . . . .	25
Further Assistance . . . . .	10	<b>Section 5: Maintenance &amp; Lubrication</b> . . . . .	<b>26</b>
<b>Section 1: Assembly &amp; Set-up</b> . . . . .	<b>11</b>	Maintenance . . . . .	26
Tractor Requirements . . . . .	11	Cutter Blade Maintenance . . . . .	26
Torque Requirements . . . . .	11	Flex Coupler & Blade Timing . . . . .	27
Uncrating Instructions . . . . .	11	Driveline Protection . . . . .	28
Vented Breather Plug Installation . . . . .	11	Clutch Run-In . . . . .	28
3-Point Hitch Assembly . . . . .	12	Clutch Assembly and Disassembly . . . . .	29
Tractor Hook-Up . . . . .	12	Skid Shoe Maintenance (Accessory) . . . . .	29
Quick Hitch Hook-up . . . . .	12	Long Term Storage . . . . .	30
Driveline Installation . . . . .	13	Ordering Replacement Parts . . . . .	30
Check Driveline Collapsible Length . . . . .	14	Lubrication . . . . .	31
Shorten Driveline . . . . .	14	Gauge Wheel Spindle Tube . . . . .	31
Check Driveline Maximum Length . . . . .	15	Gauge Wheel Hub . . . . .	31
Check Driveline Interference . . . . .	15	Gearbox . . . . .	31
<b>Section 2: Options &amp; Accessories</b> . . . . .	<b>16</b>	Flex Coupling Shaft . . . . .	32
Skid Shoe Accessory . . . . .	16	Driveline U-Joints . . . . .	32
Front and Rear Guards . . . . .	16	Driveline Shield Bearings . . . . .	32
Front Corner Deflectors (Standard) . . . . .	16	Driveline Profiles . . . . .	32
Front Rubber Guard (Option) . . . . .	16	Type of Lubrication: Multi-purpose Grease . . . . .	32
Front Single Chain Guard (Option) . . . . .	16	<b>Section 6: Specifications &amp; Capacities</b> . . . . .	<b>33</b>
Rear Metal Band Guard (Standard) . . . . .	18	<b>Section 7: Features &amp; Benefits</b> . . . . .	<b>35</b>
RCD Rear Extended Metal Guard (Option) . . . . .	18	<b>Section 8: Troubleshooting</b> . . . . .	<b>36</b>
<b>Section 3: Adjustments</b> . . . . .	<b>20</b>	<b>Section 9: Torque values Chart</b> . . . . .	<b>37</b>
Deck Leveling & Cutting Height . . . . .	20	<b>Section 10: Warranty</b> . . . . .	<b>39</b>
Deck Leveling From Left to Right . . . . .	20		
Deck Cutting Height . . . . .	20		
Tailwheel Height Adjustment . . . . .	21		
Center 3-Point Link Adjustment . . . . .	21		



© Copyright 2020 All rights Reserved

Land Pride provides this publication "as is" without warranty of any kind, either expressed or implied. While every precaution has been taken in the preparation of this manual, Land Pride assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein. Land Pride reserves the right to revise and improve its products as it sees fit. This publication describes the state of this product at the time of its publication, and may not reflect the product in the future.

Land Pride is a registered trademark.

All other brands and product names are trademarks or registered trademarks of their respective holders.

Printed in the United States of America.

See previous page for Table of contents.



### ***Parts Manual QR Locator***

The QR (Quick Reference) code on the cover and to the left will take you to the Parts Manual for this equipment. Download the appropriate App on your smart phone, open the App, point your phone on the QR code and take a picture.



### ***Dealer QR Locator***

The QR code on the left will link you to available dealers for Land Pride products. Refer to Parts Manual QR Locator on this page for detailed instructions.



These are common practices that may or may not be applicable to the products described in this manual.

## Safety at All Times

Careful operation is your best insurance against an accident.

All operators, no matter how much experience they may have, should carefully read this manual and other related manuals before operating the power machine and this implement.

- ▲ Thoroughly read and understand the "Safety Label" section, read all instructions noted on them.
- ▲ Do not operate the equipment while under the influence of drugs or alcohol as they impair the ability to safely and properly operate the equipment.
- ▲ The operator should be familiar with all functions of the tractor and attached implement, and be able to handle emergencies quickly.
- ▲ Make sure all guards and shields are in place and secured before operating implement.
- ▲ Keep all bystanders away from equipment and work area.
- ▲ Start tractor from the driver's seat with hydraulic controls in neutral.
- ▲ Operate tractor and controls from the driver's seat only.
- ▲ Never dismount from a moving tractor or leave tractor unattended with engine running.
- ▲ Do not allow anyone to stand between tractor and implement while backing up to implement.
- ▲ Keep hands, feet, and clothing away from power-driven parts.
- ▲ While transporting and operating equipment, watch out for objects overhead and along side such as fences, trees, buildings, wires, etc.
- ▲ Do not turn tractor so tight as to cause hitched implement to ride up on the tractor's rear wheel.
- ▲ Store implement in an area where children normally do not play. When needed, secure implement against falling with support blocks.



## Look For The Safety Alert Symbol

The SAFETY ALERT SYMBOL indicates there is a potential hazard to personal safety involved and extra safety precaution must be taken. When you see this symbol, be alert and carefully read the message that follows it. In addition to design and configuration of equipment, hazard control, and accident prevention are dependent upon the awareness, concern, prudence, and proper training of personnel involved in the operation, transport, maintenance, and storage of equipment.

### Be Aware of Signal Words

A signal word designates a degree or level of hazard seriousness. The signal words are:

#### DANGER

Indicates a hazardous situation that, if not avoided, will result in death or serious injury.

#### WARNING

Indicates a hazardous situation that, if not avoided, could result in death or serious injury.

#### CAUTION

Indicates a hazardous situation that, if not avoided, may result in minor or moderate injury.


## Safety Precautions for Children

**Tragedy can occur if the operator is not alert to the presence of children. Children generally are attracted to implements and their work.**

- ▲ Never assume children will remain where you last saw them.
- ▲ Keep children out of the work area and under the watchful eye of a responsible adult.
- ▲ Be alert and shut the implement and tractor down if children enter the work area.
- ▲ Never carry children on the tractor or implement. There is not a safe place for them to ride. They may fall off and be run over or interfere with the control of the power machine.
- ▲ Never allow children to operate the power machine, even under adult supervision.
- ▲ Never allow children to play on the power machine or implement.
- ▲ Use extra caution when backing up. Before the tractor starts to move, look down and behind to make sure the area is clear.

## Tractor Shutdown & Storage


- ▲ If engaged, disengage power take-off.
- ▲ Park on solid, level ground and lower implement to ground or onto support blocks.
- ▲ Put tractor in park or set park brake, turn off engine, and remove switch key to prevent unauthorized starting.
- ▲ Relieve all hydraulic pressure to auxiliary hydraulic lines.
- ▲ Wait for all components to stop before leaving operator's seat.
- ▲ Use steps, grab-handles and skid-resistant surfaces when getting on and off the tractor.
- ▲ Detach and store implement in an area where children normally do not play. Secure implement using blocks and supports.

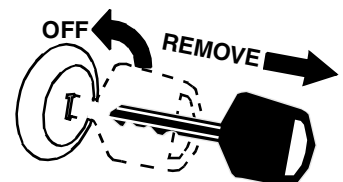

These are common practices that may or may not be applicable to the products described in this manual.


### Use A Safety Chain

- ▲ A safety chain will help control drawn machinery should it separate from the tractor drawbar.
- ▲ Use a chain with the strength rating equal to or greater than the gross weight of the towed implement.
- ▲ Attach the chain to the tractor drawbar support or other specified anchor location. Allow only enough slack in the chain to permit turning.
- ▲ Always hitch the implement to the machine towing it. Do not use the safety chain tow the implement.

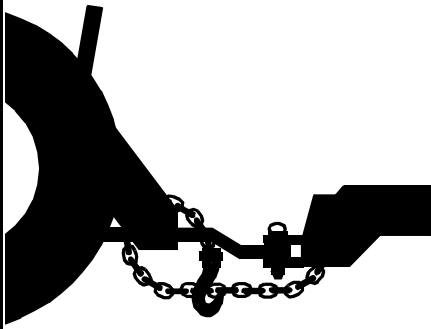

### Transport Safely

- ▲ Comply with federal, state, and local laws.
- ▲ Use towing vehicle and trailer of adequate size and capacity. Secure equipment towed on a trailer with tie downs and chains.
- ▲ Sudden braking can cause a towed trailer to swerve and upset. Reduce speed if towed trailer is not equipped with brakes.
- ▲ Avoid contact with any over head utility lines or electrically charged conductors.
- ▲ Always drive with load on end of loader arms low to the ground.
- ▲ Always drive straight up and down steep inclines with heavy end of a tractor with loader attachment on the "uphill" side.

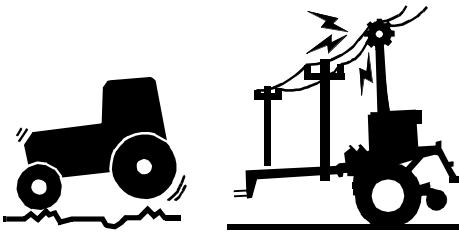

- ▲ Engage park brake when stopped on an incline.
- ▲ Maximum transport speed for an attached equipment is 20 mph. **DO NOT EXCEED.** Never travel at a speed which does not allow adequate control of steering and stopping. Some rough terrains require a slower speed.
- ▲ As a guideline, use the following maximum speed weight ratios for attached equipment:

**20 mph** when weight of attached equipment is less than or equal to the weight of machine towing the equipment.

**10 mph** when weight of attached equipment exceeds weight of machine towing equipment but not more than double the weight.

- ▲ **IMPORTANT:** Do not tow a load that is more than double the weight of the vehicle towing the load.



### Tire Safety

- ▲ Tire changing can be dangerous and must be performed by trained personnel using the correct tools and equipment.
- ▲ Always properly match the wheel size to the properly sized tire.
- ▲ Always maintain correct tire pressure. Do not inflate tires above recommended pressures shown in the Operator's Manual.
- ▲ When inflating tires, use a clip-on chuck and extension hose long enough to allow you to stand to one side and NOT in front of or over the tire assembly. Use a safety cage if available.
- ▲ Securely support the implement when changing a wheel.
- ▲ When removing and installing wheels, use wheel handling equipment adequate for the weight involved.
- ▲ Make sure wheel bolts have been tightened to the specified torque.



### Practice Safe Maintenance

- ▲ Understand procedure before doing work. Refer to the Operator's Manual for additional information.
- ▲ Work on a level surface in a clean dry area that is well-lit.
- ▲ Lower implement to the ground and follow all shutdown procedures before leaving the operator's seat to perform maintenance.
- ▲ Do not work under any hydraulically supported equipment. It can settle, suddenly leak down, or be lowered accidentally. If it is necessary to work under the equipment, securely support it with stands or suitable blocking beforehand.
- ▲ Use properly grounded electrical outlets and tools.
- ▲ Use correct tools and equipment for the job that are in good condition.
- ▲ Allow equipment to cool before working on it.


- ▲ Disconnect battery ground cable (-) before servicing or adjusting electrical systems or before welding on implement.
- ▲ Inspect all parts. Make certain parts are in good condition & installed properly.
- ▲ Replace parts on this implement with genuine Land Pride parts only. Do not alter this implement in a way which will adversely affect its performance.
- ▲ Do not grease or oil implement while it is in operation.
- ▲ Remove buildup of grease, oil, or debris.
- ▲ Always make sure any material and waste products from the repair and maintenance of the implement are properly collected and disposed.
- ▲ Remove all tools and unused parts from equipment before operation.
- ▲ Do not weld or torch on galvanized metal as it will release toxic fumes.



**These are common practices that may or may not be applicable to the products described in this manual.**

### Prepare for Emergencies

- ▲ Be prepared if a fire starts.
- ▲ Keep a first aid kit and fire extinguisher handy.
- ▲ Keep emergency numbers for doctor, ambulance, hospital, and fire department near phone.

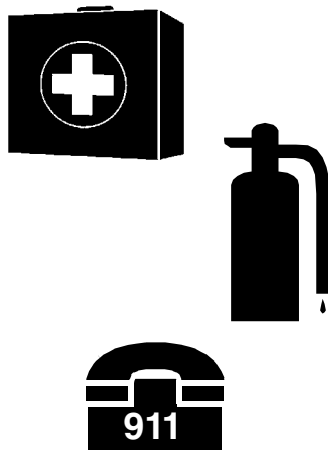

### Wear Protective Equipment

- ▲ Wear protective clothing and equipment appropriate for the job such as safety shoes, safety glasses, hard hat, and ear plugs.
- ▲ Clothing should fit snug without fringes and pull strings to avoid entanglement with moving parts.
- ▲ Prolonged exposure to loud noise can cause hearing impairment or hearing loss. Wear suitable hearing protection such as earmuffs or earplugs.
- ▲ Operating equipment safely requires the operator's full attention. Avoid wearing headphones while operating equipment.




### Avoid High Pressure Fluids

- ▲ Escaping fluid under pressure can penetrate the skin causing serious injury.
- ▲ Relieve all residual pressure before disconnecting hydraulic lines or performing work on the hydraulic system.
- ▲ Make sure all hydraulic fluid connections are properly tightened/torqued and all hydraulic hoses and lines are in good condition before applying pressure to the system.
- ▲ Use a piece of paper or cardboard, NOT BODY PARTS, to check for suspected leaks.
- ▲ Wear protective gloves and safety glasses or goggles when working with hydraulic systems.
- ▲ **DO NOT DELAY.** If an accident occurs, see a doctor familiar with this type of injury immediately. Any fluid injected into the skin or eyes must be treated within a few hours or gangrene may result.




### Use Safety Lights and Devices

- ▲ Slow moving tractors, and self-propelled equipment can create a hazard when driven on public roads. They are difficult to see, especially at night. Use the Slow Moving Vehicle (SMV) sign when on public roads.
- ▲ Flashing warning lights and turn signals are recommended whenever driving on public roads.

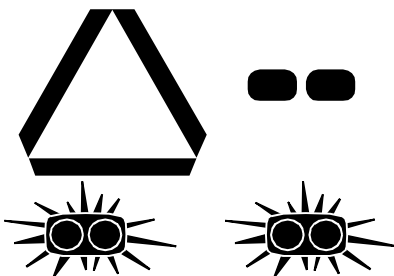


### Use Seat Belt and ROPS

- ▲ Land Pride recommends the use of a CAB or roll-over-protective-structures (ROPS) and seat belt in almost all power machines. Combination of a CAB or ROPS and seat belt will reduce the risk of serious injury or death if the power machine should be upset.
- ▲ If ROPS is in the locked-up position, fasten seat belt snugly and securely to help protect against serious injury or death from falling and machine overturn.

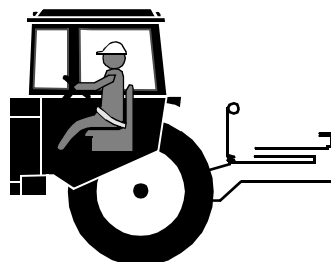

### Keep Riders Off Machinery

- ▲ Never carry riders or use tractor to lift or transport individuals.
- ▲ There is not a safe place for a person to ride.
- ▲ Riders obstruct operator's view and interfere with the control of the power machine.
- ▲ Riders can be struck by objects or thrown from the equipment.

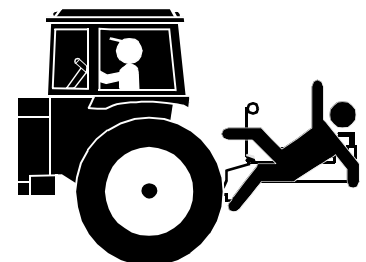

These are common practices that may or may not be applicable to the products described in this manual.

### **Avoid crystalline Silica (quartz) Dust**

Because crystalline silica is a basic component of sand and granite, many activities at construction sites produce dust containing crystalline silica. Trenching, sawing, and boring of material containing crystalline silica can produce dust containing crystalline silica particles. This dust can cause serious injury to the lungs (silicosis).

There are guidelines which should be followed if crystalline silica (quartz) is present in the dust.



- ▲ Be aware of and follow OSHA (or other local, State, or Federal) guidelines for exposure to airborne crystalline silica.
- ▲ Know the work operations where exposure to crystalline silica may occur.
- ▲ Participate in air monitoring or training programs offered by the employer.
- ▲ Be aware of and use optional equipment controls such as water sprays, local exhaust ventilation, and enclosed cabs with positive pressure air conditioning if the machine has such equipment. Otherwise respirators shall be worn.
- ▲ Where respirators are required, wear a respirator approved for protection against crystalline silica containing dust. Do not alter respirator in any way. Workers who use tight-fitting respirators can not have beards/mustaches which interfere with the respirator seal to the face.
- ▲ If possible, change into disposable or washable work clothes at the work site; shower and change into clean clothing before leaving the work site.
- ▲ Do not eat, drink, use tobacco products, or apply cosmetics in areas where there is dust containing crystalline silica.
- ▲ Store food, drink, and personal belongings away from the work area.
- ▲ Wash hands and face before eating, drinking, smoking, or applying cosmetics after leaving the exposure area.

### **Handle Chemicals Properly**

- ▲ Protective clothing should be worn.
- ▲ Handle all chemicals with care.
- ▲ Follow instructions on container label.
- ▲ Agricultural chemicals can be dangerous. Improper use can seriously injure persons, animals, plants, soil, and property.
- ▲ Inhaling smoke from any type of chemical fire is a serious health hazard.
- ▲ Store or dispose of unused chemicals as specified by the chemical manufacturer.



### **Dig Safe - Avoid Underground Utilities**

- ▲ **USA: Call 811**  
**CAN: [digsafecanada.ca](http://digsafecanada.ca)**  
Always contact your local utility companies (electrical, telephone, gas, water, sewer, and others) before digging so that they may mark the location of any underground services in the area.
- ▲ Be sure to ask how close you can work to the marks they positioned.



This page left blank intentionally.

### Safety Labels

Your Rotary Cutter comes equipped with all safety labels in place. They were designed to help you safely operate your implement. Read and follow their directions.


1. Keep all safety labels clean and legible.
2. Refer to this section for proper label placement. Replace all damaged or missing labels. Order new labels from your nearest Land Pride dealer. To find your nearest dealer, visit our dealer locator at [www.landpride.com](http://www.landpride.com).
3. Some new equipment installed during repair requires safety labels to be affixed to the replaced component as

specified by Land Pride. When ordering new components make sure the correct safety labels are included in the request.

4. Refer to this section for proper label placement.

To install new labels:

- a. Clean surface area where label is to be placed.
- b. Spray soapy water onto the cleaned area.
- c. Peel backing from label and press label firmly onto the surface.
- d. Squeeze out air bubbles with edge of a credit card or with a similar type of straight edge.

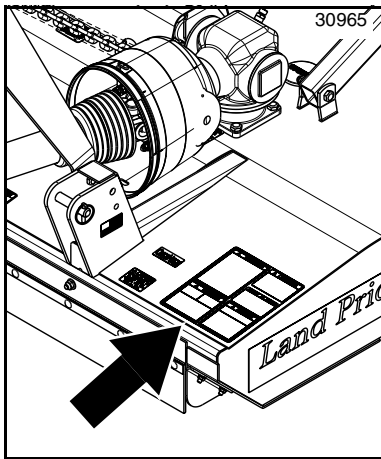


### 844-190C

Safety Combo

- 1 - Place: Front left corner of deck.

<p><b>WARNING</b></p>	<p><b>DANGER</b></p>	<p><b>DANGER</b></p>
<p>To prevent serious injury or death:</p> <ul style="list-style-type: none"> <li>• Do not operate or work on this machine without reading and understanding the Operator's Manual.</li> <li>• Avoid unsafe operation or maintenance.</li> <li>• Transport with clean reflectors, SMV, and lights as required by federal, state, and local laws.</li> <li>• If manual is lost, contact your nearest dealer for a new manual.</li> </ul>	<p>ROTATING DRIVELINE CONTACT CAN CAUSE DEATH. KEEP AWAY!</p> <p><b>DO NOT OPERATE WITHOUT:</b></p> <ul style="list-style-type: none"> <li>• All driveline guards, tractor and equipment shields in place.</li> <li>• Drivelines securely attached at both ends.</li> <li>• Driveline guards that turn freely on driveline.</li> </ul> <p><b>DO NOT USE PTO ADAPTORS</b></p>	<p>THROWN OBJECT AND ROTATING BLADE HAZARD</p> <p>To prevent serious injury or death:</p> <ul style="list-style-type: none"> <li>• Do not operate unless all guards are installed and in good condition.</li> <li>• Inspect and clear debris from mowing area prior to mowing.</li> <li>• Do not operate with bystanders in or around mowing area.</li> <li>• Do not place hands or feet under deck when operating or when engine is running.</li> <li>• Do not dismount until blades come to a complete stop.</li> </ul>
<p><b>WARNING</b></p>	<p><b>WARNING</b></p>	<p><b>WARNING</b></p>
<p><b>CRUSHING HAZARD</b></p> <p>Before performing maintenance on machine and to prevent serious injury or death:</p> <ul style="list-style-type: none"> <li>• Read and understand operator's manual.</li> <li>• Stop engine, set brake, and wait for all moving parts to stop before dismounting.</li> <li>• Support cutter securely before working beneath.</li> </ul>	<p><b>RUN OVER HAZARD</b></p> <p>To prevent serious injury or death:</p> <ul style="list-style-type: none"> <li>• Always use seat belt when operating.</li> <li>• Never allow riders on tractor or machine.</li> </ul>	<p><b>ROLLOVER HAZARD</b></p> <p>To prevent serious injury or death:</p> <ul style="list-style-type: none"> <li>• Always use seat belt when operating.</li> <li>• Only operate on tractors equipped with a rollover protective structure (ROPS).</li> <li>• If equipped with foldable ROPS, only operate in the unfolded and locked position.</li> <li>• Use caution when mowing along inclines.</li> </ul>



⚠ WARNING Cancer and reproductive harm · [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

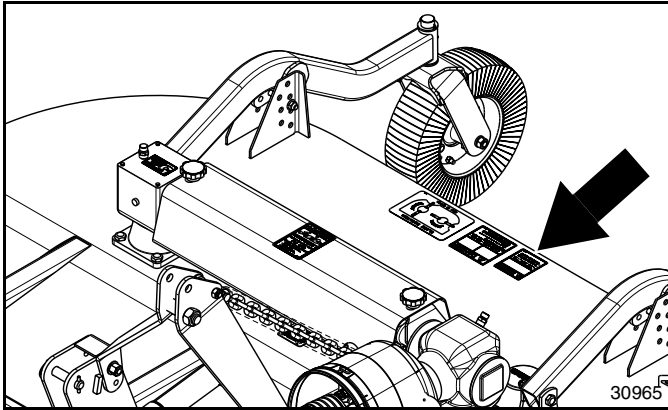

### 818-556C

Danger: Thrown Object



1 - Place: Back middle of deck.

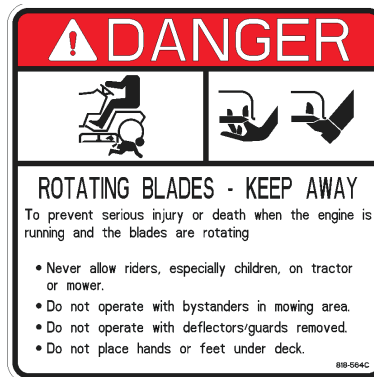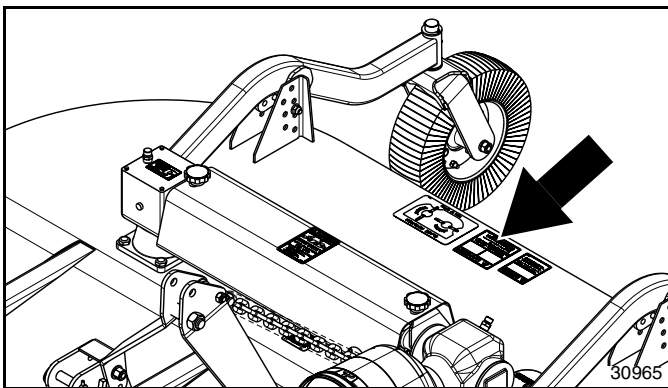

### 818-564C

Danger: Rotating Blades



2 - Places: Back middle and front right corner of deck.

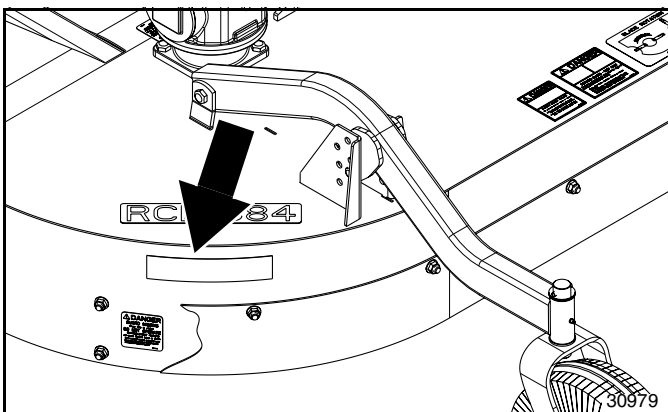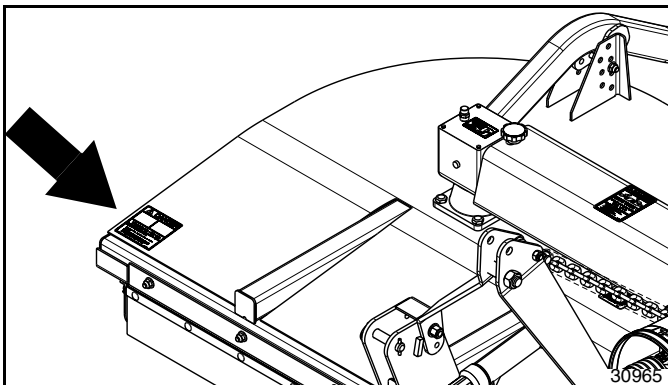

### 838-614C

2" x 9" Red Reflector


2 - Places: Back rounding corners of deck.

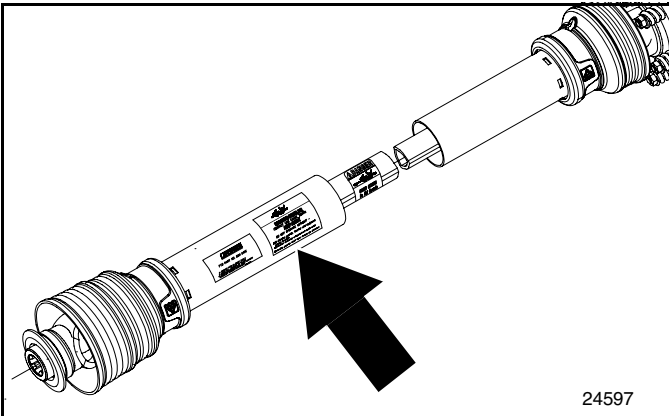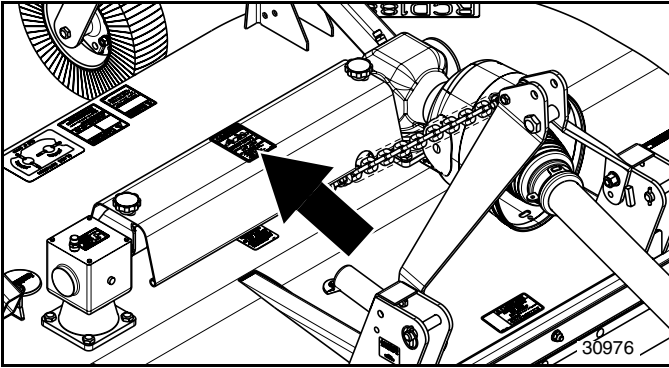

### 818-552C

Danger: Rotating Driveline


2 - Places: Top of intermediate driveline guard and on main driveline shield.

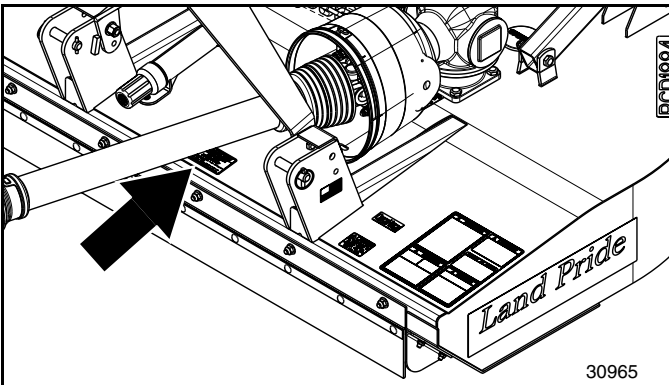

### 818-142C

Danger: Rotating Driveline

1 - Place: Front middle of deck

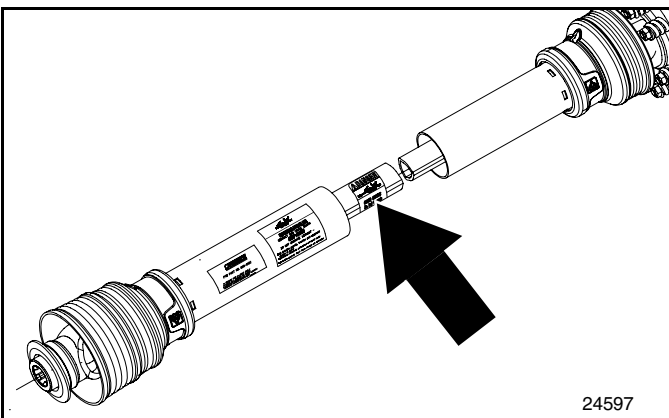


### 818-540C

Danger: Guard Missing

1 - Place: On profile of main driveline.




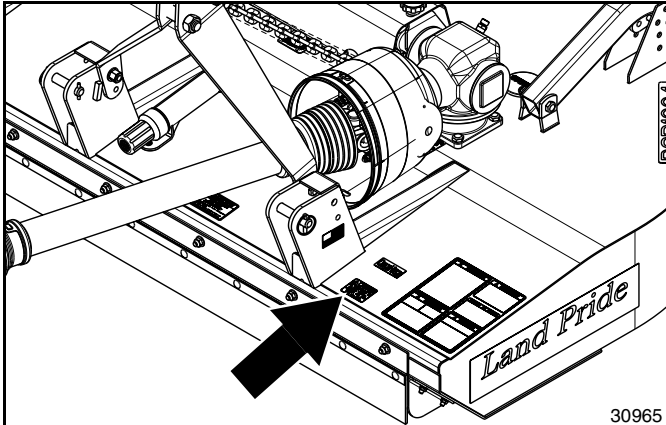

### 818-130C

Warning: 540 rpm



1 - Place: Front left corner of deck.

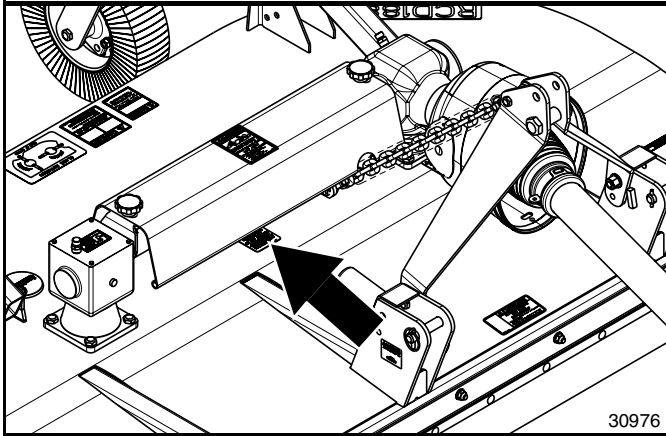

### 818-543C

Danger: Guard Missing

3 - Places: Middle center, beneath gearbox input shaft,  
and back left corner of deck.

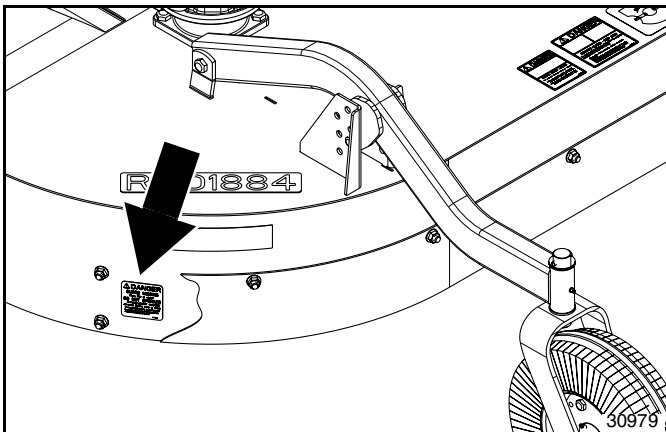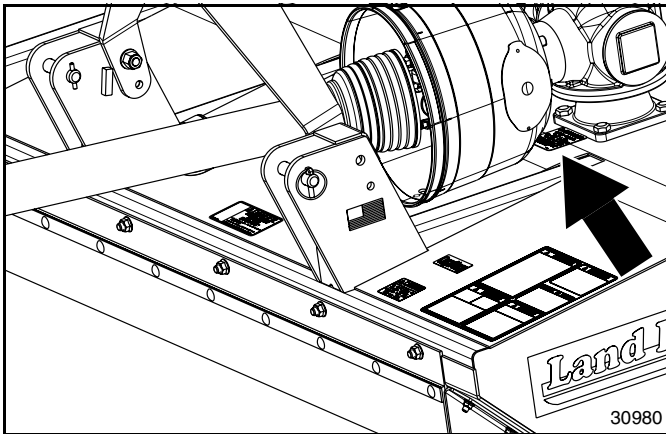

## Introduction:

Land Pride welcomes you to the growing family of new product owners. This Rotary Cutter has been designed with care and built by skilled workers using quality materials. Proper assembly, maintenance, and safe operating practices will help you get years of satisfactory use from this implement.

## Application

The Land Pride RCD1884 offset Rotary Cutter is designed and built to clear grass, weeds, and light brush up to 1 1/2 inches in diameter from areas under orchard and grove trees, beneath over-hanging hedge rows, or under fence lines and guard railings. The unit offsets 10" to the right with rear mounted 360 degree rotating tailwheels making it well suited for operation on gentle slopes and mildly contoured approaches immediately adjacent to ponds, lakes, streams, drainage ditches, and roadways. The seven foot cutting width and 2" to 12" cutting height makes it well suited for mowing pastures, set aside acres, and row crop fields.

The RCD1884 is compatible with 35 to 60 horsepower tractors with a category I three point hitch and is Quick Hitch adaptable. It operates at 540 rpm power take-off speed and is protected with a category 3 driveline with a 2-plate slip clutch. Supplied with the cutter is a stump jumper, front rubber shield and rear metal band shield.

See “**Specifications & Capacities**” on page 33 and “**Features & Benefits**” on page 35 for additional information and performance enhancing options.

## Using This Manual

- This Operator’s Manual is designed to help familiarize the operator with safety, assembly, operation, adjustments, troubleshooting, and maintenance. Read this manual and follow the recommendations to help ensure safe and efficient operation.
- The information contained within this manual was current at the time of printing. Some parts may change slightly to assure you of the best performance.
- To order a new Operator’s or Parts Manual, contact your authorized dealer. Manuals can also be downloaded, free-of-charge, from our website at [www.landpride.com](http://www.landpride.com).

## Terminology:

“Right” or “Left” as used in this manual is determined by facing the direction the machine will operate while in use unless otherwise stated.

## Definitions:

**IMPORTANT:** A special point of information related to the following topic. Land Pride’s intention is this information must be read & noted before continuing.

**NOTE:** A special point of information that the operator should be aware of before continuing.

## Owner Assistance

The dealer should complete the Online Warranty Registration at the time of purchase. This information is necessary to provide you with quality customer service.

The parts on your Rotary Cutter have been specially designed by Land Pride and should only be replaced with genuine Land Pride parts. Contact a Land Pride dealer if customer service or repair parts are required. Your Land Pride dealer has trained personnel, repair parts, and equipment needed to service the implement.

## Serial Number

For quick reference and prompt service, record model and serial number on the inside cover page and again on the warranty page. Always provide model number and serial number when ordering parts and in all correspondences with your Land Pride dealer. For location of your serial number plate, see Figure 1.

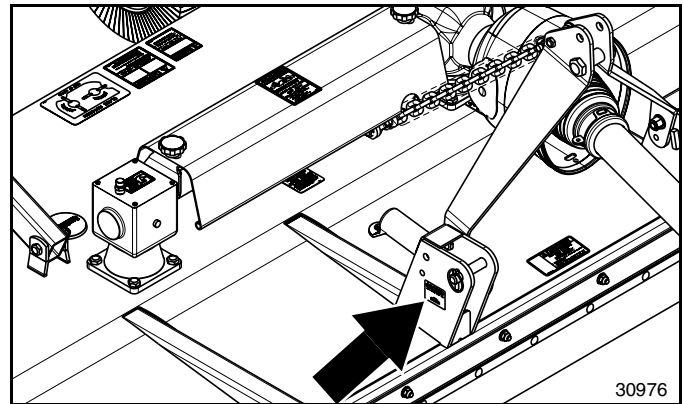


Figure 1

## Further Assistance

Your dealer wants you to be satisfied with your new Rotary Cutter. If for any reason you do not understand any part of this manual or are not satisfied with the service received, the following actions are suggested:

1. Discuss any problems you have with your implement with your dealership service personnel so they can address the problem.
2. If you are still not satisfied, seek out the owner or general manager of the dealership, explain the problem/question, and request assistance.
3. For further assistance write to:

**Land Pride Service Department**  
**1525 East North Street**  
 P.O. Box 5060  
 Salina, KS. 67402-5060

E-mail address  
[lp servicedept@landpride.com](mailto:lp servicedept@landpride.com)

### Tractor Requirements

Tractor horsepower and hitch category should be within the range noted below. Tractors outside the horsepower range must not be used.

Tractor Horsepower Rating . . . . . 35 to 60 horsepower  
Hitch Category . . . . . Cat I  
power take-off Speed . . . . . 540 rpm  
power take-off Shaft Type . . . . . 1 3/8"-6 Spline

### WARNING

*To avoid serious injury or death:*

*Lightweight tractors with rear attached implements may need weights added to the front to maintain steering control. Consult your tractor Operator's Manual to determine proper weight requirements and maximum weight limitations.*

### Torque Requirements

Refer to "Torque Values Chart for Common Bolt Sizes" on page 37 to determine correct torque values when tightening hardware. See "Additional Torque Values" at bottom of chart for exceptions to common torque values.

### Uncrating Instructions

### WARNING

*To avoid serious injury or death:*

*Always secure cutter with an overhead crane, fork lift, or other suitable lifting device before removing hardware bags, shipping components, bands, lag screws, or hitch pins. The cutter can suddenly fall.*

**IMPORTANT:** Do not attach hoist to gauge wheel forks or gauge wheel arms near the spindles. The arms and/or forks can bend when lifting the cutter.


1. Secure cutter with a hoist or other lifting device before removing shipping hardware.
2. Remove lag screws securing front face of cutter to the crate.
3. Using lifting device, remove tension on hitch pins securing clevis plates to shipping crate.
4. Remove hitch pins from clevis plates and lift cutter from shipping crate. Gently lower unit onto the floor.

### Vented Breather Plug Installation

Refer to Figure 1-1:

**IMPORTANT:** Gearboxes are shipped with solid plugs in them to prevent oil loss during shipping and handling. The solid plug on top of the gearbox must be replaced with a vented dipstick before operating the implement.

The right angle gearbox is shipped with vented breather plug factory installed. The other gearbox is shipped with vented breather plug packaged with the Operator's Manual in the manual tube. Remove temporary solid plug from top of gearbox and replace with vented breather plug. See your nearest Land Pride dealer if breather plug is missing.

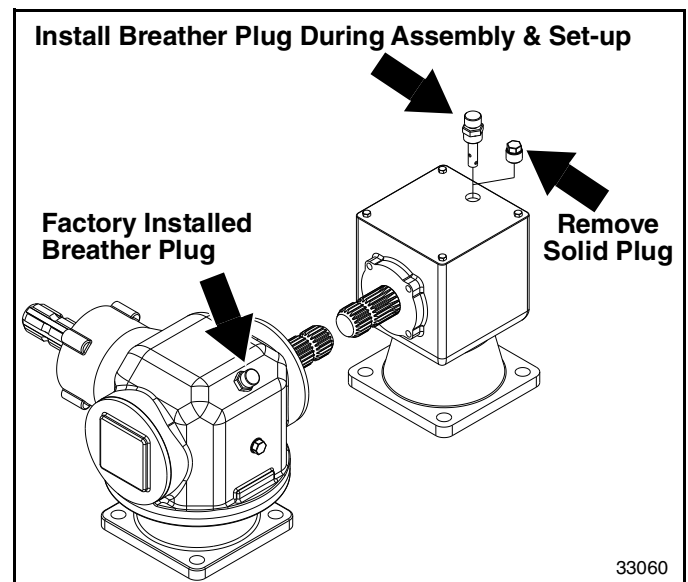


Vented Breather Plug Installation  
Figure 1-1

## Section 1: Assembly &amp; Set-up

## 3-Point Hitch Assembly

Refer to Figure 1-2:

1. Attach left-hand hitch plate (#2) to upper mounting hole in clevis plate with 5/8"-11 x 1 3/4" GR5 cap screw (#6), two flat washers (#12), and hex nylock nut (#9). Draw nylock nut up snug, do not tighten.
2. Attach right-hand hitch plate (#3) to upper mounting hole in clevis plate with 5/8"-11 x 1 3/4" GR5 cap screw (#6), two flat washers (#12), and hex nylock nut (#9). Draw nylock nut up snug, do not tighten.
3. Rotate top of hitch plates (#2 & #3) back until bottom of hitch plates rest against the key stops.

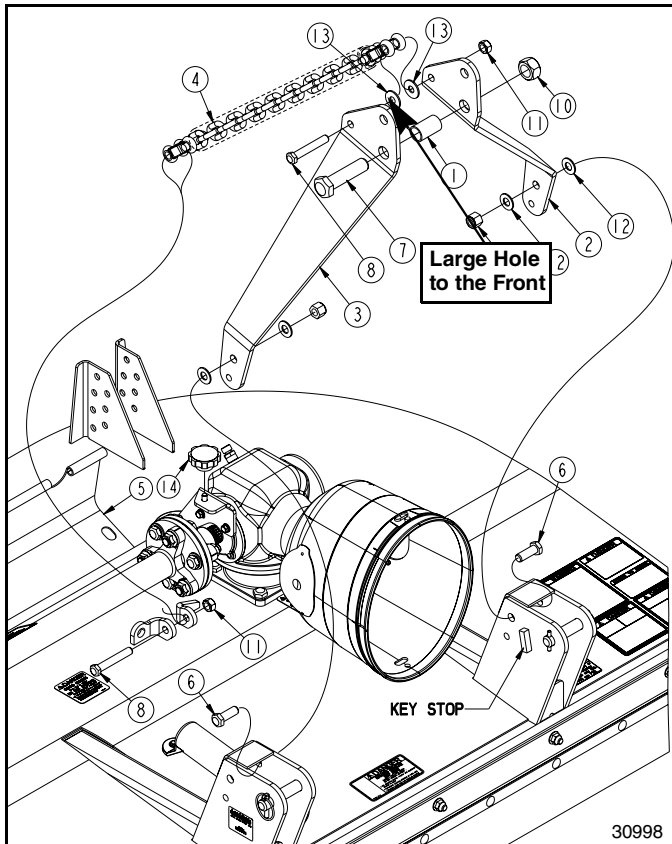

Hitch Assembly  
Figure 1-2

4. Attach 2 1/16" long bushing (#1) to left and right-hand hitch plates (#2 & #3) with 1"-8 x 4" GR5 hex head cap screw (#7) and hex top locknut (#10). Tighten top locknut (#10) to torque value listed under "Additional Torque Values" on page 37.
5. Attach one end of float chain (#4) between hitch plates (#2 & #3) with 9/16"-12 x 3 1/2" GR5 cap screw (#8), two flat washers (#13), and hex top locknut (#11). Draw locknut (#11) up snug, do not tighten.
6. Remove hand knobs (#14) and rotate flex coupler shield open.
7. Attach opposite end of float chain (#4) to deck lugs with 9/16"-12 x 3 1/2" GR5 cap screw (#8) and top locknut (#11). Draw locknut up snug, do not tighten.

8. Rotate outer coupler shield closed and replace existing hand knobs (#14). Hand tighten hand knobs.

## Tractor Hook-Up

Refer to Figure 1-3 on page 13:

**WARNING***To avoid serious injury or death:**Lightweight tractors with rear attached implements may need weights added to the front to maintain steering control.**Consult your tractor Operator's Manual to determine proper weight requirements and maximum weight limitations.*

**NOTE:** Land Pride's Quick Hitch can be attached to the tractor to provide quick and easy 3-point hook-up and detachment. See your nearest Land Pride dealer to purchase a Quick-Hitch.

A 3-Point Category I or II hitch is required. The lower 3-Point arms of the 3-Point hitch must be stabilized to prevent side-to-side movement. Most tractors have sway blocks or adjustable chains for this purpose.


1. Locate cutter on a flat level surface.
2. Slowly back tractor up to Rotary Cutter while using tractor's 3-Point hydraulic control to align lower 3-Point arm holes with clevis lug holes on the cutter.
3. Engage tractor park brake, shut tractor engine off, and remove key before dismounting from tractor.
4. Attach lower arms to clevis plates with hitch pins and secure with linchpins.
5. Connect top center 3-Point link to upper pivot hitch with clevis pin and hairpin cotter supplied by the customer.
6. Return to the tractor. Slowly raise and lower implement carefully to ensure that the drawbar, tires, and other equipment on the tractor do not contact cutter frame. Move or remove drawbar if it interferes with the cutter.
7. Manually adjust one of the two lower lift arms up or down to level the Rotary Cutter from left to right.
8. Manually adjust the length of the top-link to level the Rotary Cutter from front to rear. Final deck leveling adjustments will be made later.
9. The 3-Point lift cylinders on your tractor should be adjusted to allow for lateral float. Please consult your tractor's manual for adjusting instructions.

## Quick Hitch Hook-up


Refer to Figure 1-4 on page 13:

If 3-Point hitch plates won't stay upright for Quick Hitch attachment, a hitch pin or bolt (#1) may be inserted into hole "A" to stabilize hitch plates. Be sure to remove hitch pin before connecting driveline to the tractor. Hitch pin or bolt is supplied by customer.



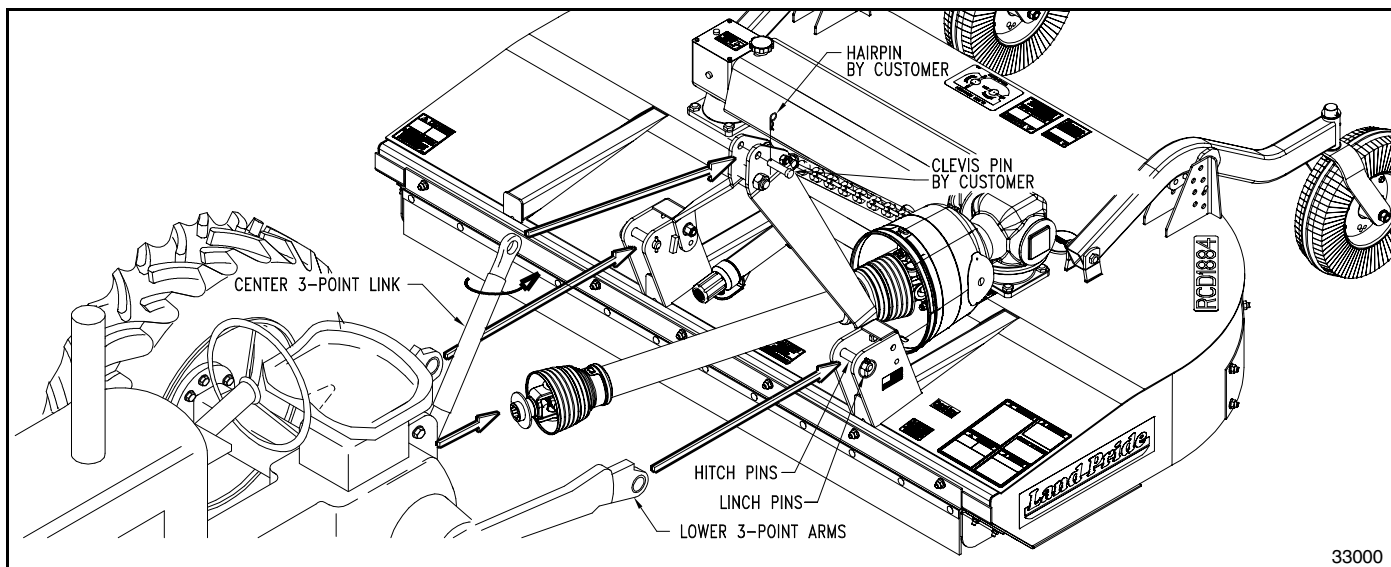

**Tractor Hook-Up**  
**Figure 1-3**

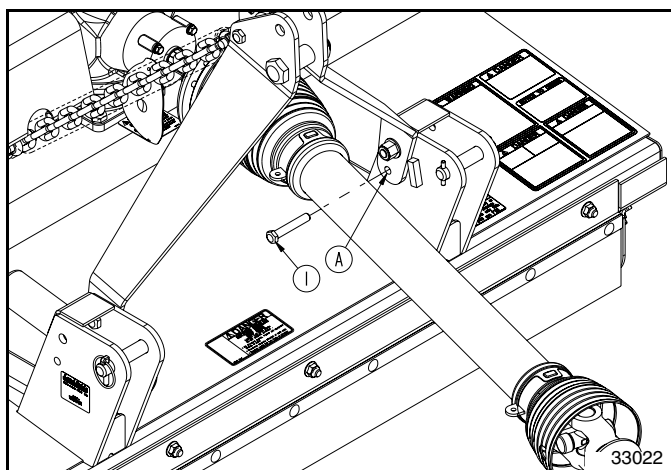

**Quick Hitch Hook-up**  
**Figure 1-4**

## Driveline Installation

### **DANGER**

To avoid serious injury or death:

- Do not engage power take-off while hooking-up or unhooking the driveline, or while someone is standing near the driveline. A person's body and/or clothing can become entangled in the driveline.
- All guards and shields must be installed and in good working condition while operating the implement.
- Do not use a power take-off adapter. The adapter will increase strain on the tractor's power take-off shaft causing possible damage to shaft and driveline. It will also defeat the purpose of the tractor's power take-off shield.

### **WARNING**

To avoid serious injury or death:


- Always disengage power take-off, put tractor in park or set park brake, shut tractor engine off, remove ignition key, and wait for blades to come to a complete stop before dismantling tractor.
- Some tractors are equipped with two power take-off speeds. Be certain your tractor's power take-off shaft is set-up to operate at 540 rpm. Do not exceed 540 rpm power take-off speed or equipment breakage may result.

**IMPORTANT:** An additional driveline may be required if implement is attached to more than one tractor or if a Quick Hitch is used.

The driveline must be lubricated before putting it into service. Refer to "**Lubrication**" on page 31.

The power take-off shaft and gearbox input shaft must be aligned and level with each other when checking driveline minimum length. A driveline that is too long can damage tractor and implement.

1. Park tractor on a level surface. Slowly engage tractor 3-Point lift lever to raise cutter until gearbox shaft is in line and level with the tractor power take-off shaft.
2. Support cutter deck at this height with support jacks or blocks to keep cutter from drifting down.
3. Place gear selector in park, set park brake, shut tractor off, and remove switch key.

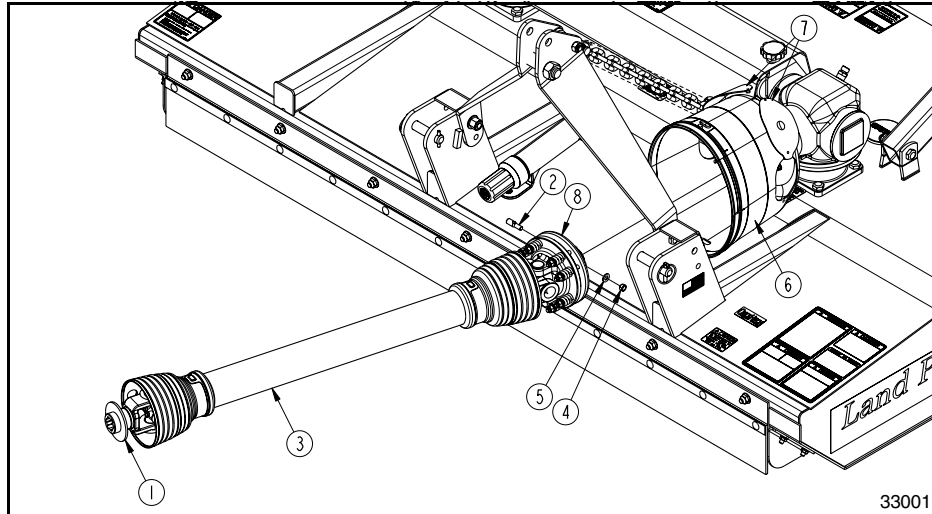

**Driveline Installation**  
**Figure 1-5**

**Refer to Figure 1-5:**

4. Remove tapered pin (#2) from slip-clutch (#8).
5. Unsnap access doors (#7) from gearbox cone (#6) and rotate about the metal pin either up or down to gain access to the gearbox input spline shaft.
6. Slide slip-clutch end of driveline onto gearbox input shaft until holes in slip-clutch align with notch in gearbox shaft.
7. Insert tapered pin (#2) and secure with removed washer (#5) & hex nut (#4). Tighten hex nut to the correct torque.
8. Move slip-clutch back and forth several times to make sure it is locked onto gearbox shaft.
9. Replace access covers (#7).
10. Pull back on yoke collar (#1) and push driveline yoke onto the tractor power take-off shaft. Release pull collar and continue to push driveline yoke forward until pull collar locks in place.
11. Move driveline yoke back and forth several times to make sure yoke is locked in place. If driveline yoke will not lock in place, skip to **“Check Driveline Collapsible Length”** on page 14.
12. Continue with **“Check Driveline Collapsible Length”**.

### Check Driveline Collapsible Length

**IMPORTANT:** A driveline that is too long can bottom out causing structural damage to the tractor and implement. Always check driveline minimum length during initial setup, when connecting to a different tractor, and when alternating between using a quick hitch and a standard 3-point hitch. More than one driveline may be required to fit all applications.

1. Make sure driveline is properly installed and level before checking driveline collapsible length. (Refer to **“Driveline Installation”** instructions on page 13.)

**Refer to Figure 1-6 on page 15:**


2. With driveline level, measure (“B” dimension) back from universal joint shield to end of outer driveline shield as shown in Figure 1-6. If measurement is less than 1", then shorten driveline using instructions provided below.
3. Skip to **“Check Driveline Maximum Length”** on page 15 if “B” dimension is 1" or more.

### Shorten Driveline

**Refer to Figure 1-6 on page 15:**

Be sure to check driveline collapsed length first. If required, shorten driveline.

1. Unhook driveline from tractor power take-off shaft. Pull outer and inner drivelines apart.
2. Reattach outer driveline to tractor power take-off shaft. Pull on inner and outer driveline yokes to be sure universal joints are properly secured.
3. Hold inner and outer drivelines parallel to each other:
  - a. Measure 1" (“B” dimension) back from outer driveline universal joint shield and make a mark at this location on the inner driveline shield.
  - b. Measure 1" (“B” dimension) back from the inner driveline universal joint shield and make a mark at this location on the outer driveline shield.

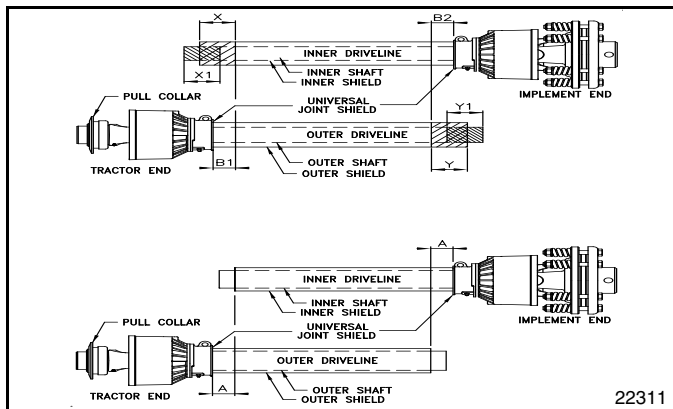

**Driveline Shortening**  
**Figure 1-6**


4. Remove driveline from tractor power take-off shaft and gearbox shaft.
5. Measure from end of inner shield to scribed mark ("X" dimension). Cut off inner shield at the mark. Cut same amount off the inner shaft ("X1" dimension).
6. Measure from end of outer shield to scribed mark ("Y" dimension). Cut off outer shield at the mark. Cut same amount off the outer shaft ("Y1" dimension).
7. Remove all burrs and cuttings.
8. Continue with "Check Driveline Maximum Length".

### Check Driveline Maximum Length

Refer to Figure 1-7:

The driveline maximum allowable length must, when fully extended, have a minimum overlap of profile tubes by not less than 1/2 the free length with both inner and outer profile tubes being of equal length.

1. Separate inner and outer profiles apart and apply multi-purpose grease inside the outer shaft.
2. Reassemble inner and outer driveline profiles together with just 1/2 overlapping of the profile tubes as shown. Once assembled, measure and record maximum allowable length here. \_\_\_\_\_

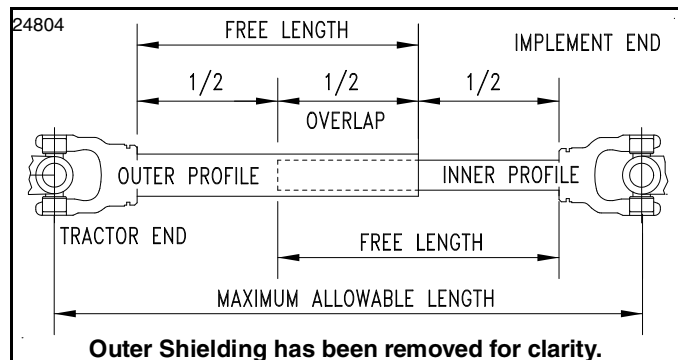

**Driveline Maximum Extended Length**  
**Figure 1-7**

### Check Driveline Interference

1. Make certain driveline yokes are properly attached.
2. Start tractor and raise Rotary Cutter just enough to remove support blocks from under the cutter.
3. Slowly engage tractor hydraulic 3-Point control lever to lower cutter while checking for sufficient drawbar clearance. Move drawbar ahead, aside, or remove if required.

Refer to Figure 1-8:




### WARNING

To avoid serious injury or death:

A rotating driveline must not exceed an angle of 25 degrees up or down, and never engage a driveline while at an angle exceeding 25 degrees up or down. The driveline can break and send projectiles.

4. With power take-off off, raise implement fully up to make the following checks below. If driveline exceeds any of the limits listed, set tractor 3-Point lift limiter at a height that will keep the driveline within its lift limits and to avoid premature driveline breakdown.
  - Driveline does not exceed 25° up.
  - Driveline does not exceed maximum allowable length recorded in step 2 under "Check Driveline Maximum Length".

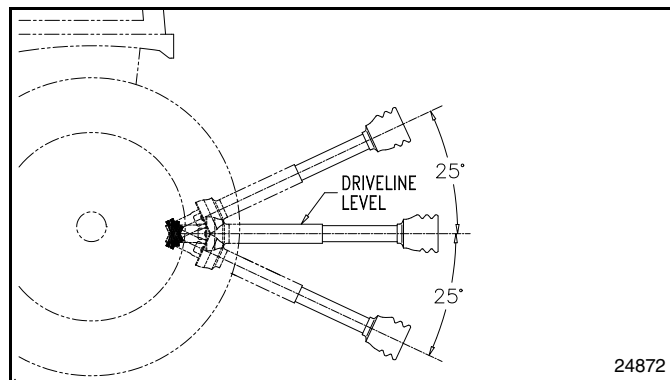

**Maximum Driveline Movement During Operation**  
**Figure 1-8**

## Skid Shoe Accessory

Refer to Figure 2-1:

326-341A RCD1884 SKID SHOES

The RCR1884 cutter is supplied with welded-on skid shoes. Replaceable skid shoes (Sold as an accessory) can be bolted to the weld-on skid shoes to increase protection against side panel wear.


### WARNING

To avoid serious injury or death:

*Excessive wear on skid shoes can damage side panels, cause inadequate operation of cutter, and create a safety hazard.*

*Always replace skid shoes at the first sign of wearing thin.*

1. Attach skid shoes (#1) to front left and right corners of the cutter with 3/8"-16 x 1" GR5 plow bolts (#2), flat washers (#4), and locknuts (#3).
2. Tighten locknuts to the correct torque.

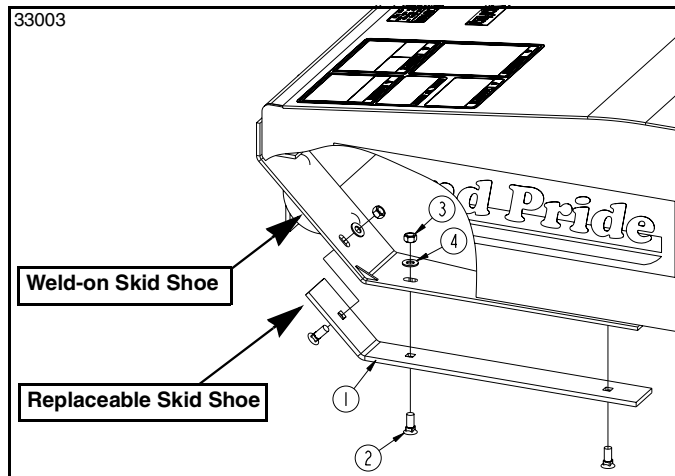

Skid Shoe Accessory  
Figure 2-1

## Front and Rear Guards

Land Pride strongly recommends front and rear safety guards be installed on this cutter to help stop objects from being thrown out from under the cutter at high speeds. When cutting along highways and in areas where people or animals may be present, always use front and rear guards on your cutter.

### Front Corner Deflectors (Standard)

Refer to Figure 2- 2 on page 17:

326-490L FRONT CORNER DEFLECTORS

Front corner deflectors are included with the cutter and should be installed before installing the front guard.

1. Install corner deflectors (#2) with 3/8"-16 x 1" GR5 carriage bolts (#3) and hex whiz nuts (#6). Draw nuts up snug, do not tighten.

### Front Rubber Guard (Option)

Refer to Figure 2- 2 on page 17:

326-342A RCR1884 FRONT RUBBER GUARD

1. Install front rubber guards (#1) with 1/2"-13 x 1 1/4" GR5 carriage bolts (#4) and hex whiz nuts (#5). Draw nuts up snug, do not tighten.
2. Adjust front guard (#1) and corner deflectors (#2) to fit evenly against each other.
3. Tighten all whiz nuts (#5 & #6) to the correct torque.

### Front Single Chain Guard (Option)


Refer to Figure 2-3 on page 17:

326-449A FRONT SINGLE CHAIN GUARD


The Single Chain Guard option provides a better flow of air under the cutter resulting in a more evenly discharge of cut material.

1. Attach front single chain guard (#1) to deck front with 1/2"-13 x 1 1/4" GR5 carriage bolts (#2) and hex whiz nuts (#3). Draw nuts up snug, do not tighten.
2. Adjust front chain guard (#1) and corner deflectors (#2 in Figure 2- 2) to fit evenly against each other.
3. Tighten all chain guard hex whiz nuts (#3) and corner deflector hex whiz nuts (#6 in Figure 2- 2) to the correct torque.



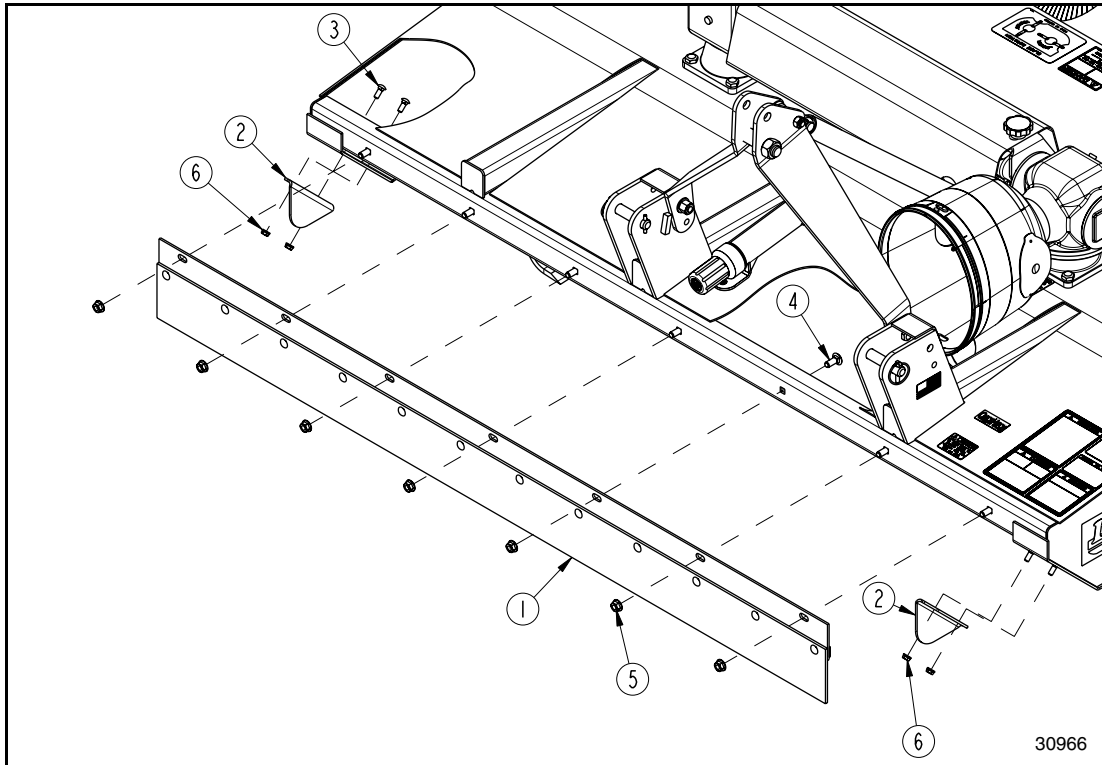

**Front Rubber Guard**  
**Figure 2-2**

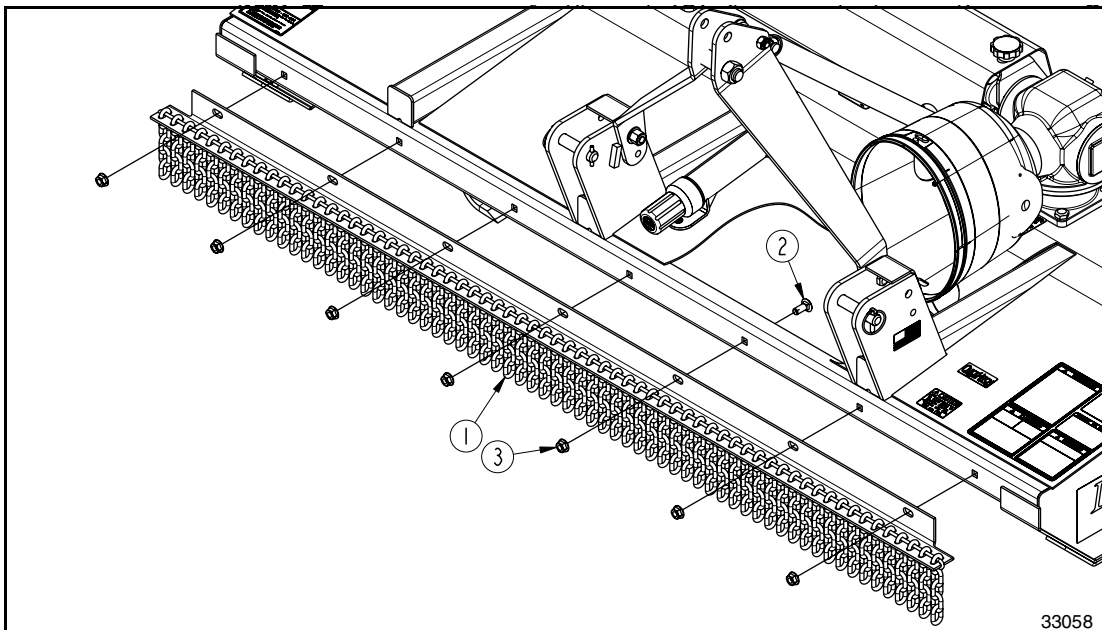

**Front Single Chain Guard**  
**Figure 2-3**

## Rear Metal Band Guard (Standard)

**Refer to Figure 2-4 on page 19:**

326-464A RCR1884 REAR METAL BAND Guard

This Rear Metal Band Guard is provided with the cutter unless the optional RCD Rear Extended Metal Guard is chosen when ordering the RCD1884 cutter from factory. It will need to be removed as follows before installing the RCD Rear Extended Metal Guard.



### DANGER

*To avoid serious injury or death:*

*Do not remove rear guard unless it is replaced by an approved safety guard. Serious body injury or loss of life can result without an approved rear guard.*



### CAUTION

*To avoid minor or moderate injury:*

*The Rear Metal Band Guard is in spring tension and will want to snap straight as the hex whiz nuts are removed.*

1. Be aware that the curved ends will want to pop up as each nut in the curved area is removed. Safely remove nuts 3A first, 3B second, 3C third, and 3D last.
2. Once all the nuts are safely removed, remove rear band guard (#1) and 1/2" carriage bolts (#2).
3. Store Rear Metal Band Guard and hardware for reuse later should the optional RCD Rear Guard becomes bent, cracked, or broken.


## RCD Rear Extended Metal Guard (Option)

**Refer to Figure 2-5 on page 19:**


326-458A RCD REAR GUARD

This RCD Rear Extended Metal Guard is offset to provide a better flow of air under the cutter resulting in a more evenly discharge of cut material.

1. Attach rear deflector brackets (#2) to rear band deflector (#3) with 1/2"-13 x 1" GR5 cap screws (#5) and hex whiz nuts (#7). Draw nuts up snug.
2. Attach rear band deflector (#3) to deck rear with 1/2"-13 x 3 1/2" GR5 carriage bolts (#6), deflector spacer (#1), and hex whiz nuts (#7). Draw nuts up snug, do not tighten.
3. Attach rear deflector brackets (#2) to deck rear with 1/2"-13 x 1" GR5 carriage bolts (#4) and hex whiz nuts (#7). Draw nuts up snug, do not tighten.
4. Tighten all hex whiz nuts (#7) to the correct torque.

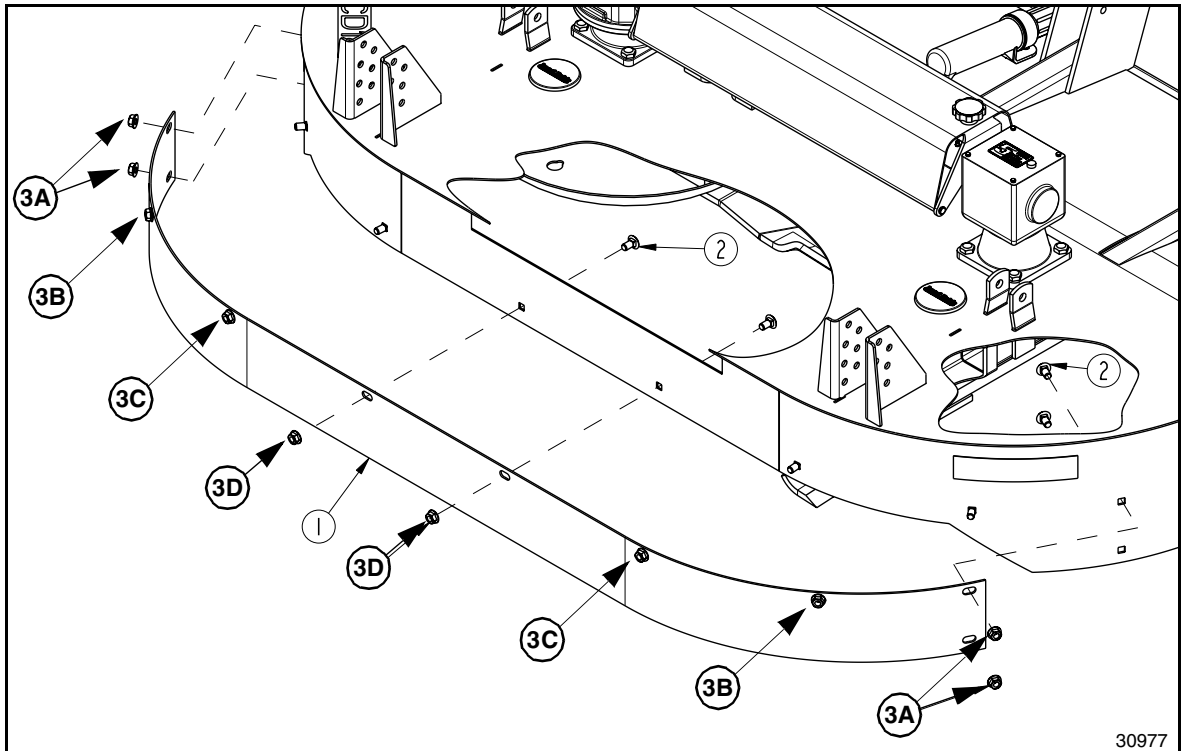

**Rear Metal Guard**  
**Figure 2-4**

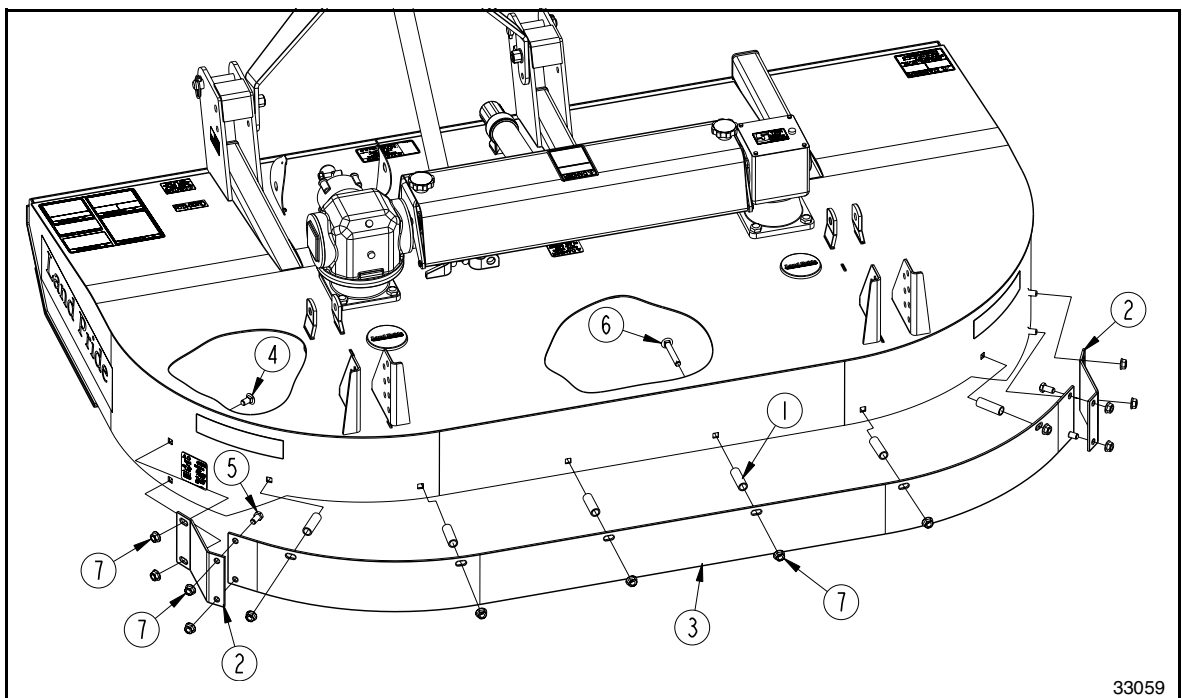

**RCD Rear Metal Extended Guard (Option)**  
**Figure 2-5**

## Deck Leveling & Cutting Height

There are 4 primary adjustments that should be made prior to actual field operation:

- Deck Leveling From Left to Right
- Deck Cutting Height
- Center 3-Point Link Adjustment
- Tailwheel Height Adjustment

Proper adjustment of each of these items will provide for higher efficiency, improved cutting performance, and longer blade life. The following tools will be needed:

- Pliable tape measure
- Spirit or carpenters level
- Set of wrenches and/or socket wrench set
- Protective gloves

### WARNING

To avoid serious injury or death:

Always follow “Tractor Shutdown Procedure” provided in this manual before dismounting the tractor.

## Deck Leveling From Left to Right

Refer to Figure 3-2 on page 21:

1. Locate tractor with Rotary Cutter on a flat, level surface.
2. Use tractor’s hydraulic 3-Point control lever to lower cutter until tailwheel makes contact with ground surface.
3. Place a level on the cutter deck as shown. Manually adjust one or both lower 3-Point lift arms until deck is level from left to right. On some tractors, only one arm can be adjusted vertically.

## Deck Cutting Height

Refer to Figure 3-1:


### WARNING

To avoid serious injury or death:


Avoid direct contact with cutter blades by wearing a pair of gloves. Cutter blades have sharp edges and burrs that can cause injuries.

**IMPORTANT:** The front blade tip should be lower than rear blade tip by approximately 1". The cutter is subject to continuous material flow under the deck if the rear blade is at the same height or lower than the front blade causing horsepower loss, grass clumps, blade wear, and frequent blade sharpening.

1. With gloves on hands, carefully rotate each blade tip to the position shown in Figure 3-1.
2. Measure distance from cutting tip of front blade to ground surface. This distance is the cutting height.
3. Using tractor’s 3-Point hydraulic control, raise or lower the 3-Point arms until the front blade tip is at the desired cutting height.
4. The top center link should be loose when deck rear is supported by the tailwheel. If not, lengthen center link until loose. Final adjustment will be made later.
5. Measure distance from cutting tip of rear blade to ground. This distance should be slightly higher than the front blade but not more than 1" higher.
6. If rear blade is lower than the front blade or is more than 1" higher than the front blade, then the tailwheel height must be adjusted. If needed, see “Tailwheel Height Adjustment” instructions below.
7. Repeat steps 1 through 6 until tailwheel and 3-Point arms are adjusted to the desired cutting height.
8. Set tractor’s 3-Point hydraulic control stop once the tailwheel and 3-Point arms are adjusted properly.

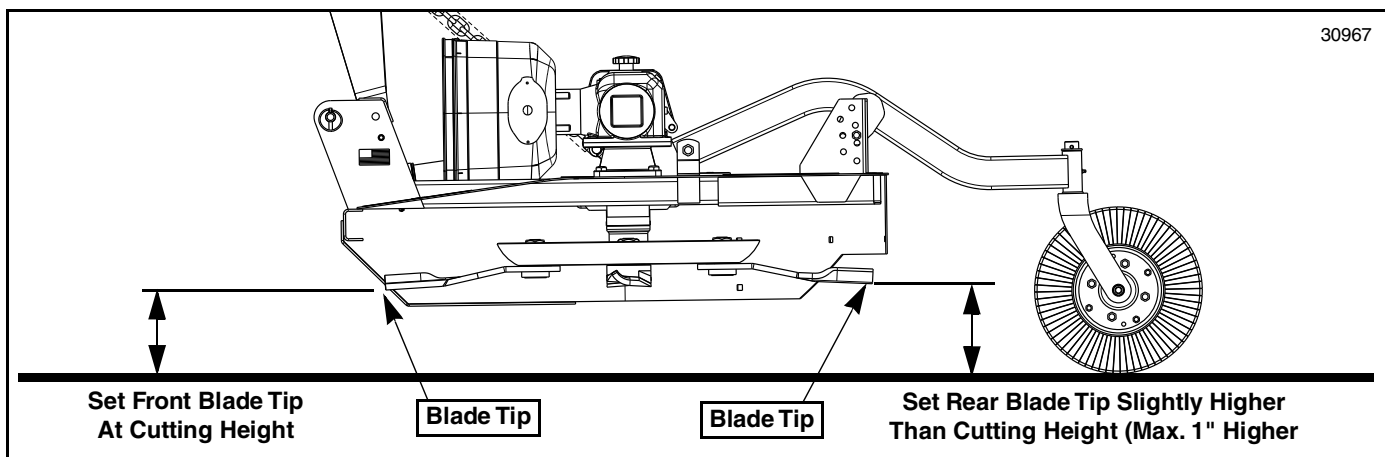

Cutting Height  
Figure 3-1

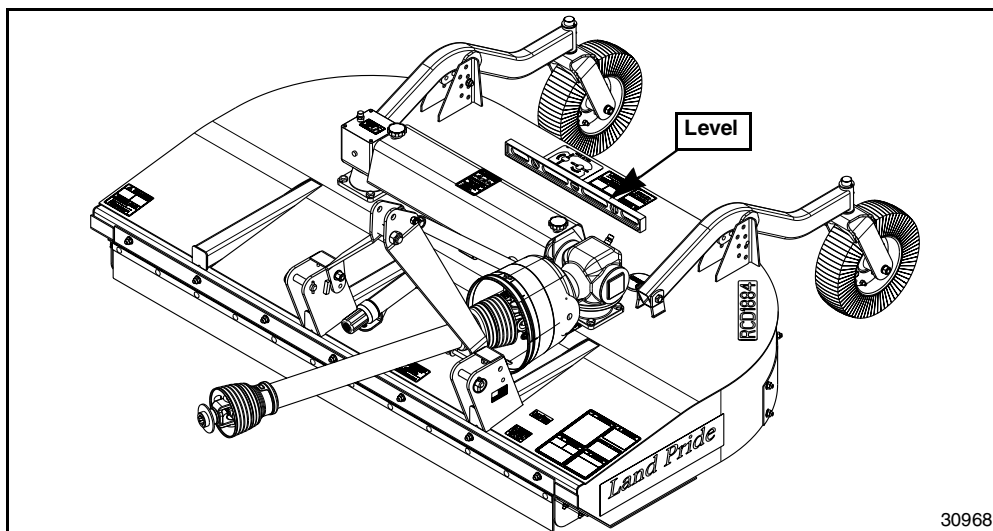


**Deck Leveling**  
**Figure 3-2**

### Tailwheel Height Adjustment

**Refer to Figure 3-3:**

If the front blade tip is set at the desired cutting height and the back blade tip is at the same height or lower or is higher than the front blade tip by more than 1", then tailwheel (#1) must be adjusted up or down as follows:

1. Use tractor's 3-Point hydraulic control to lift cutter until tailwheels clear the ground.
2. Remove hex whiz nut (#2) and cap screw (#1).
3. Adjust tailwheel as follows:
  - To lower rear blade height, raise tailwheel up.
  - To increase rear blade height, lower tailwheel down.
4. With tailwheels adjusted to the correct height, replace 1/2"-13 x 4" GR5 cap screw (#1) and hex whiz nut (#2). Tighten whiz nut to the correct torque.
5. Readjust tractor's lower 3-Point lift arms as needed. See **"Deck Cutting Height"** on page 20.

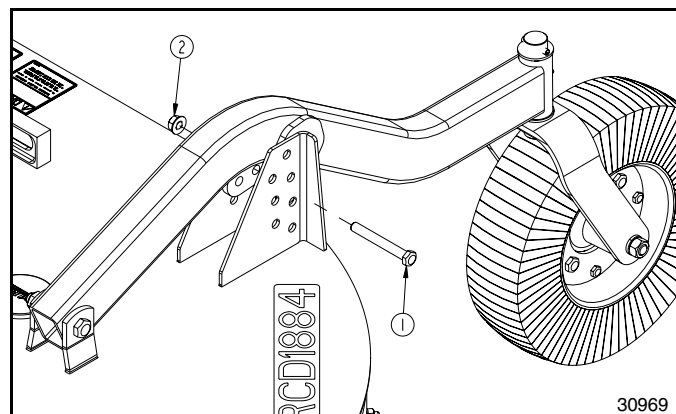


**Tailwheel Height Adjustment**  
**Figure 3-3**

### Center 3-Point Link Adjustment

**Refer to Figure 3-4:**

**NOTE:** The lower bolted-on-bushing in the center hitch is used with a quick hitch attachment.

1. Lower cutter deck to preset cutting height.
2. Adjust length of center 3-Point link until the center hitch pin is vertically above the lower 3-Point hitch pins. The float chain should be hanging loosely when adjusted correctly. This arrangement allows for optimum ground contour following performance.
3. Lock center 3-Point link in this position.

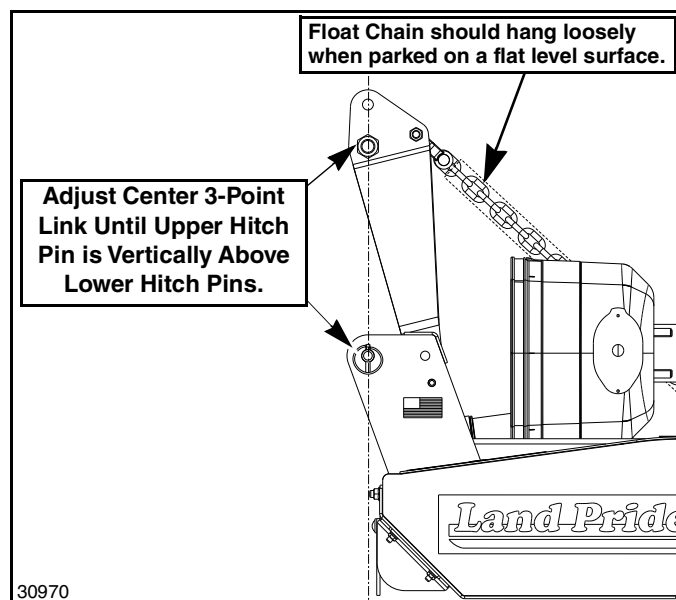

**Center 3-Point Link Adjustment**  
**Figure 3-4**



## Section 4: Operating Instructions

### Operating Checklist

Hazard control and accident prevention are dependent upon the awareness, concern, prudence, and proper training involved in the operation, transport, storage, and maintenance of the Rotary Cutter. Therefore, it is absolutely essential that no one operates the Rotary Cutter unless they are age 16 or older and have read, fully understood, and are totally familiar with the Operator's Manual. Make sure the operator has paid particular attention to:

- **Important Safety Information**, page 1
- **Section 1: Assembly & Set-up**, page 11
- **Section 2: Options & Accessories**, page 16
- **Section 3: Adjustments**, page 20
- **Section 4: Operating Instructions**, page 22
- **Section 5: Maintenance & Lubrication**, page 26

Perform the following inspections before using your Rotary Cutter.

### Operating Checklist

✓	Check	Page
	Make sure all guards and shields are in place. Refer to "Important Safety Information".	1
	Follow hook-up & driveline instructions. Refer to "Tractor Hook-Up" & "Driveline Installation".	12 & 13
	Make all required adjustments. Refer to "Section 3: Adjustments".	20
	Perform all required maintenance. Refer to "Section 5: Maintenance & Lubrication".	26
	Lubricate cutter and driveline as needed. Refer to "Lubrication".	31
	Lubricate all gearboxes and replace oil plugs properly. Refer to "Gearbox" lubrication.	31
	Check cutter initially and periodically for loose bolts and pins. Refer to "Torque Values Chart".	37

### Safety Information

#### DANGER

To avoid serious injury or death:

- Do not engage power take-off while hooking-up or unhooking the driveline, or while someone is standing near the driveline. A person's body and/or clothing can become entangled in the driveline.
- All guards and shields must be installed and in good working condition while operating the implement.
- Tractor power take-off shaft shield, driveline shields, and gearbox shaft shields must be installed and in good working condition to avoid driveline entanglement and projectiles flying off of the driveline.
- Never place hands or feet under the deck or attempt to make adjustments to the cutter with power take-off engaged. Cutter blades rotating at high speeds cannot be seen and are located close to the deck sides. Body extremities will be cut off instantly.

- Always disconnect driveline from power take-off shaft before servicing underside of cutter. The tractor can be started with power take-off engaged.
- Do not use cutter as a fan. Cutting blades are not properly designed or guarded for this use.
- Rotary Cutters have the ability to discharge objects at high speeds; therefore, the use of front & rear safety guards is mandatory with this cutter. Stop blade rotation if bystanders are in or around the area. It is recommended that a safety shield be placed between the operator and cutter on an open air tractor.
- Do not use a power take-off adapter. The adapter will increase strain on the tractor's power take-off shaft causing possible damage to shaft and driveline. It will also defeat the purpose of the tractor's power take-off shield.

#### WARNING

To avoid serious injury or death:

- Select a safe ground speed when transporting. Never travel at a speed which does not allow adequate control of steering and stopping, and never exceed 20 mph (32.2 km/h) with attached equipment. Rough terrain requires a slower speed.
- Always follow "Tractor Shutdown Procedure" provided in this manual before dismounting the tractor.
- Do not operate and/or travel across inclines where tractor and/or implement can rollover. Consult your tractor's manual for acceptable inclines the tractor is capable of traveling across.
- Never carry riders on the implement or tractor. Riders can obstruct the operator's view, interfere with controls, be pinched by moving components, become entangled in rotating components, struck by objects, thrown about, fall off and be run over, etc.
- Allow only persons to operate this implement who have fully read and comprehended this manual, who have been properly trained in the safe operation of this implement, and who are age 16 or older. Serious injury or death can result from the inability to read, understand, and follow instructions provided in this manual.
- Perform scheduled maintenance. Check for loose hardware, missing parts, broken parts, structural cracks, and excessive wear. Make repairs before putting the implement back into service.
- Always disengage power take-off before lifting cutter fully up. Never operate cutter in the raised position. The cutter can discharge objects at high speeds.
- A rotating driveline must not exceed an angle of 25 degrees up or down, and never engage a driveline while at an angle exceeding 25 degrees up or down. The driveline can break and send projectiles.
- Do not use implement as a man lift, work platform or as a wagon to carry objects. It is not properly designed or guarded for this use.
- Do not exceed rated cutting capacity of your cutter. See specifications & capacities for specified cutting capacity.

## Section 4: Operating Instructions

*Exceeding rated cutting capacity can damage drive components, cutter blades, and deck components.*

- *Buildup of debris around moving components and gearboxes is a fire hazard. Keep rotating parts and gearboxes free from debris to avoid serious injury and property damage.*
- *Improper oil level can cause bearing failure and be a fire hazard. Maintain proper gearbox oil level to avoid serious injury and property damage.*
- *Do not operate a broken or bent driveline. Such a driveline will break apart while rotating at high speeds and can cause serious injury or death. Always remove the implement from use until the damaged driveline can be repaired or replaced.*
- *Some tractors are equipped with two power take-off speeds. Be certain your tractor's power take-off shaft is set-up to operate at 540 rpm. Do not exceed 540 rpm power take-off speed or equipment breakage may result.*

### Inspection of Tractor & Cutter

Make the following inspections with cutter attached to a tractor, power take-off disengaged, and power take-off completely stopped:

1. Park tractor and cutter on a level surface.
2. Disengage power take-off, place gear selector in park, set park brake, shut tractor off, and remove switch key. Make sure cutter blades have come to a complete stop before dismounting from tractor.
3. Inspect tractor safety equipment to make sure it is installed and in good working condition.
4. Inspect cutter safety equipment to make sure it is installed and in good working condition.
5. Check driveline to make certain it is securely connected to the tractor power take-off shaft and cutter gearbox shaft.
6. Check driveline guards to make certain they are in good condition and in place.
7. Carefully raise and lower implement to ensure that the drawbar, tires, and other equipment on the tractor do not contact cutter frame or driveline.
8. With cutter deck resting on solid supports, power take-off disengaged, and blade rotation completely stopped:
  - Check for and remove foreign objects wrapped around blade spindles.
  - Check for nicked, bent, broken, and worn cutting blades. Replace or sharpen blades as required. Refer to **"Cutter Blade Maintenance"** on page 26.
9. Remove solid supports from under the deck.
10. Verify cutter is set at the correct cutting height. See **"Deck Leveling & Cutting Height"** on page 20.

The remaining inspections are made by engaging the power take-off to check for vibrations.



### WARNING

*To avoid serious injury or death:*

- *Stop power take-off immediately if vibration continues after a few revolutions during start-up and anytime thereafter. Wait for all components to come to a complete stop before dismounting from tractor to check for probable causes. Make necessary repairs and adjustments before continuing.*
  - *Some tractors are equipped with two power take-off speeds. Be certain your tractor's power take-off shaft is set-up to operate at 540 rpm. Do not exceed 540 rpm power take-off speed or equipment breakage may result.*
11. Start tractor, set throttle to idle or slightly above idle, and slowly engage power take-off. Initial start-up vibration is normal and should stop after a few revolutions. Stop power take-off rotation immediately if vibration continues.
  12. Once cutter is running smoothly, increase tractor power take-off speed to 540 rpm. Stop power take-off rotation immediately if vibration occurs.
  13. Investigate cause of vibration and make repairs before putting cutter back into service.

### Transporting



### WARNING

*To avoid serious injury or death:*

- *Select a safe ground speed when transporting. Never travel at a speed which does not allow adequate control of steering and stopping, and never exceed 20 mph (32.2 km/h) with attached equipment. Rough terrain requires a slower speed.*
- *When traveling on roadways, travel in such a way that other vehicles may pass you safely. Always use LED lights, clean reflectors, and a slow moving vehicle sign that is visible from the back to warn operators in other vehicles of your presence. Always comply with all federal, state, and local laws.*

**IMPORTANT:** Always disengage power take-off and wait for driveline to stop rotating before raising implement to transport position.

1. Make sure driveline does not contact tractor or cutter when raising cutter to transport position.
2. Reduce tractor ground speed when turning and leave enough clearance so cutter does not contact obstacles such as buildings, trees, or fences.
3. Limit transport speed to 20 mph. Transport only with a farm tractor of sufficient size and horse power.
4. When traveling on roadways, transport in such a way that faster moving vehicles may pass you safely.
5. Shift tractor to a lower gear when traveling over rough or hilly terrain.

## Blade Engagement & Disengagement

Cutter blades can lock-up against each other during start-up and shut-down especially if the tractor's power take-off engagement is "**INSTANT ON**" and "**INSTANT OFF**". Following Blade Engagement and Blade Disengagement instructions below will help eliminate blade lock up.

### Blade Engagement

1. Increase throttle to a speed just enough to get the cutter started without stalling tractor while slowly engaging drivelines. Use tractor's power take-off soft start option if available.
2. Ensure that all power shafts are rotating and that the cutter is not vibrating excessively after ramping up to power take-off speed for at least 3 seconds. If excessive vibration continues after 3 seconds at full power take-off speed, disengage power take-off immediately, shut down tractor, and remove switch key.
3. Check blades for a lock-up situation. Block cutter deck up before working under the unit. Unlock blades, remove support blocks, and repeat "**Blade Engagement**" instructions.

### Blade Disengagement

1. Slowly decrease throttle speed until engine idle speed is reached and then disengage power take-off.
2. Engage tractor park brake, shut tractor engine off and remove switch key. Stay on tractor until blades have come to a complete stop.

## Field Operation

### DANGER

*To avoid serious injury or death:*

*Clear area to be cut of debris and other unforeseen removable objects before cutting. Mark non-removable hazards such as tree stumps, post stubs, protruding objects, rocks, drop-offs, holes, etc. with a visible flag.*

**IMPORTANT:** Maintain correct power take-off speed. Loss of power take-off speed will allow blades to swing back resulting in ragged, uneven cutting.

**IMPORTANT:** Your cutter is equipped with free swinging cutting blades to reduce shock loads when striking obstacles. However, it is best to avoid striking obstacles to extend cutter and blade life.

**NOTE:** Do not cut in wet conditions. Wet material will build up on the deck underside creating poor discharge, high wear, and additional horsepower.

Periodically disengage power take-off, turn off tractor, remove key & check for objects wrapped around blade spindle. Block deck up before removing objects.

Frequently inspect cutter for loose bolts and nuts. Tighten all loose hardware as indicated in the "**Torque Values Chart**" on page 37.

1. Thoroughly inspect area to be cut for debris and unforeseen objects. Mark any potential hazards.
2. Follow "**Blade Engagement**" instructions on right side of this page to start cutter blades turning.
3. Optimum ground speed depends on density of material being cut, horsepower rating of tractor, and terrain. Always operate tractor at cutter's full rated power take-off speed in a gear range that allows cutter to make a smooth cut without lugging tractor down, usually between 2 to 5 mph.
4. Follow "**Blade Disengagement**" instructions on right side of this page to stop cutter blades. After the first 50 feet, disengage power take-off and check to see that the cutter is adjusted properly.
5. Do not engage power take-off when cutter is in the fully raised or lowered positions.
6. Periodically disengage power take-off, shut down tractor, remove key, and check for foreign objects wrapped around the blade spindle. Block cutter deck up before removing objects.
7. Frequently inspect cutter for loose bolts and nuts. Tighten all loose bolts and nuts as indicated in the "**Torque Values Chart for Common Bolt Sizes**" on page 37.
8. For additional information, see "**General Operating Instructions**" on page 25.



## Unhook Rotary Cutter

1. Unhook Rotary Cutter from the tractor as follows:
2. See “**Long Term Storage**” on page 30 if cutter is to be stored for a long time.
3. Park on a level solid surface and lower deck to ground level or onto support blocks.
4. Engage tractor park brake, shut tractor engine off, and remove switch key. Stay on tractor until blades have come to a complete stop.
5. Disconnect driveline from tractor.
6. Unhook 3-Point hitch from tractor and drive tractor forward several feet.
7. Reinstall hitch pins, linchpins, and hair pin cotter in cutter hitch for safe keeping.
8. Collapse driveline by pushing tractor end of driveline towards cutter gearbox.
9. Support driveline off the ground with a support block to keep it up out of the dirt.

## General Operating Instructions

It is important that you familiarize yourself with the Operator's Manual, completed Operators Checklist, properly attached cutter to your tractor, made leveling adjustments, and preset your cutting height before beginning a running operational safety check on your Land Pride Rotary Cutter.

The running operational safety check may now be done. It is important that at any time during this safety check you detect a malfunction in either the cutter or tractor that you immediately shut the tractor off, remove its key, and make necessary repairs and/or adjustments before continuing on.

Make sure before starting the tractor that the park brake is engaged, power take-off is disengaged, and cutter is resting on the ground. Start tractor and set engine throttle speed at a low idle. Raise cutter with tractor's rear hydraulic lift control lever to transport position making sure that the driveline does not bind and does not contact the cutter frame. Lower the cutter to the ground and at a low engine speed engage the power take-off. If everything is running smoothly at a low idle, slowly raise the cutter to transport height checking for bind or chatter in the driveline. Lower the cutter to the ground and increase the tractor's engine rpm until it reaches the cutter full power take-off operating speed of 540 rpm. If everything is still running smoothly, once more raise the cutter to transport height to check for driveline bind or chatter. Lower the cutter to the ground, return the engine to a low idle, and disengage the power take-off. Position the adjustable stops on the tractor's hydraulic lift lever so the cutter can be consistently returned to the same cutting and transport height.

You should now be ready to transport to your cutting site at a safe ground speed. On roadways transport in such a manner that faster moving vehicles can easily see you and pass you safely. Reduce your speed when traveling over rough and hilly terrain. Avoid quick or sharp steering corrections. Take extra care to ensure that the mower doesn't come into contact with obstacles such as trees, buildings, or fences. Use accessory lights and appropriate reflective devices to provide adequate warning to pedestrians and other vehicle operators when traveling on public roads and in the dark of night. Comply with all local, state, and federal laws.

It is important that you inspect the area where you will be cutting and clear it of safety hazards and foreign objects either before or after you arrive at the cutting site. Never assume the area is clear. Cut only in areas you are familiar with and are free of debris and unseen objects. Extremely tall grass should be cut twice to detect potential hazards. In the event you do strike an object stop the cutter and tractor immediately to inspect and make necessary repairs to the cutter before resuming operation. It really pays to inspect a new area and to develop a safe plan before cutting.

You will need to maintain 540 rpm power take-off speed and 2 to 5 mph ground speed to produce a clean cut. Make a tractor gear and range selection that will enable you to maintain these speed combinations. Generally the quality of cut is better at lower ground speeds. Dense ground cover will create the need to slow down even more. In certain conditions tractor tires will roll grass down resulting in an uneven cut when the grass fails to rebound. Should this happen you may try reversing the direction of cut and/or double cut to achieve the desired finish. Avoid very low cutting heights especially on extremely uneven terrain. Always cut downward on slopes and avoid crossing the face of steep slopes. Avoid sharp drops and cross diagonally through dips to prevent hanging up tractor and cutter. Slow down in turns. Remember to look back often.

Now that you're prepared and well briefed you may begin cutting. Reducing tractor engine speed, lower cutter to cutting position, engage power take-off, raise engine rpm to the appropriate power take-off speed and begin cutting.

Make wide turns when possible. Three-point hitch and optional Quick Hitch models can be lifted into transport position to make tight turns and to reverse direction. Try increasing or decreasing ground speed to determine the effect on quality of cut. With a little practice you will be pleased with what you and your Land Pride Rotary Cutter can do.

Whether you are done mowing, need to take a break, or just need to make a few adjustments to the cutter, remember to reduce tractor rpm, disengage power take-off, stop on level ground, set tractor park brake, turn off engine, and remove switch key. Stay on the tractor until the cutter blades have come to a complete dead stop.

## Maintenance

Proper servicing and adjustments are key to the long life of any implement. With careful inspection and routine maintenance, you can avoid costly downtime and repair.

Check all bolts and pins after using the unit for several hours and on a regular basis thereafter to ensure they are tight and secured.

Replace worn, damaged, or illegible safety labels by obtaining new labels from your Land Pride Dealer.

### DANGER

To avoid serious injury or death:

- Always disconnect driveline from power take-off shaft before servicing underside of cutter. The tractor can be started with power take-off engaged.
- Always secure equipment with solid, non-concrete supports before working under it. Never go under equipment supported by concrete blocks or hydraulics. Concrete can break, hydraulic lines can burst, and/or hydraulic controls can be actuated even when power to hydraulics is off.

### WARNING

To avoid serious injury or death:

- Do not operate cutter with blades that are out-of-balance, bent, excessively worn, excessively nicked, or with blade bolts that are excessively worn. Such blades can break loose at high speeds.
- Do not attempt to straighten a bent blade or weld on a blade. Do not attempt to modify a blade such as hard surfacing, heat treating, cold treating, or by any other method. Always replace blades with new Land Pride blades to assure safety.
- Do not alter implement or replace parts on the implement with other brands. Other brands may not fit properly or meet OEM (Original Equipment Manufacturer) specifications. They can weaken the integrity and impair the safety, function, performance, and life of the implement. Replace parts only with genuine OEM parts.
- Buildup of debris around moving components and gearboxes is a fire hazard. Keep rotating parts and gearboxes free from debris to avoid serious injury and property damage.
- Improper oil level can cause bearing failure and be a fire hazard. Maintain proper gearbox oil level to avoid serious injury and property damage.

## Cutter Blade Maintenance


**IMPORTANT:** Replace cutting blades in pairs with genuine Land Pride blades only. Replacing single blades can result in an out-of-balance condition that will contribute to premature bearing wear/breakage and/or structural cracks in gearbox and/or deck.

Always inspect cutting blades before each use. Make certain they are properly installed and are in good working condition. Replace any blade that is damaged, worn, bent, or excessively nicked. Small nicks can be ground out when sharpening. Remove cutting blades and sharpen or replace:


1. Place tractor gear selector in park and set brakes, shut engine off and remove ignition key.
2. Disconnect main driveline from tractor power take-off and secure cutter deck in the up position with solid supports before servicing underside of cutter.
3. Inspect cutting blades. Make certain they are properly installed and are in good working condition. Replace any blade that is damaged, worn, bent, or excessively nicked. Small nicks can be ground out.

**Refer to Figure 5-1 on page 27:**

4. Remove access cover (#5).
5. Rotate blade bolt (#1) until aligned with access hole (A).
6. Unscrew locknut (#3) to remove cutting blade (#6). Blade bolt (#1) is keyed and will not turn freely.
7. Repeat steps 4 to 6 for the other blade.
8. Both blades should be sharpened at the same angle as the original cutting edge and must be replaced or re-ground at the same time to maintain proper balance in the cutting unit. The following precautions should be taken when sharpening blades:
  - a. Do not remove more material than necessary.
  - b. Do not heat and pound out a cutting edge.
  - c. Do not grind blades to a razor edge. Leave a blunt cutting edge approximately 1/16" thick.
  - d. Always grind cutting edge so end of blade remains square to cutting edge and not rounded.
  - e. Do not sharpen back side of blade.
  - f. Both blades should weigh the same with not more than 1 1/2 oz. difference. Unbalanced blades will cause excessive vibration which can damage gearbox bearings and create structural cracks.

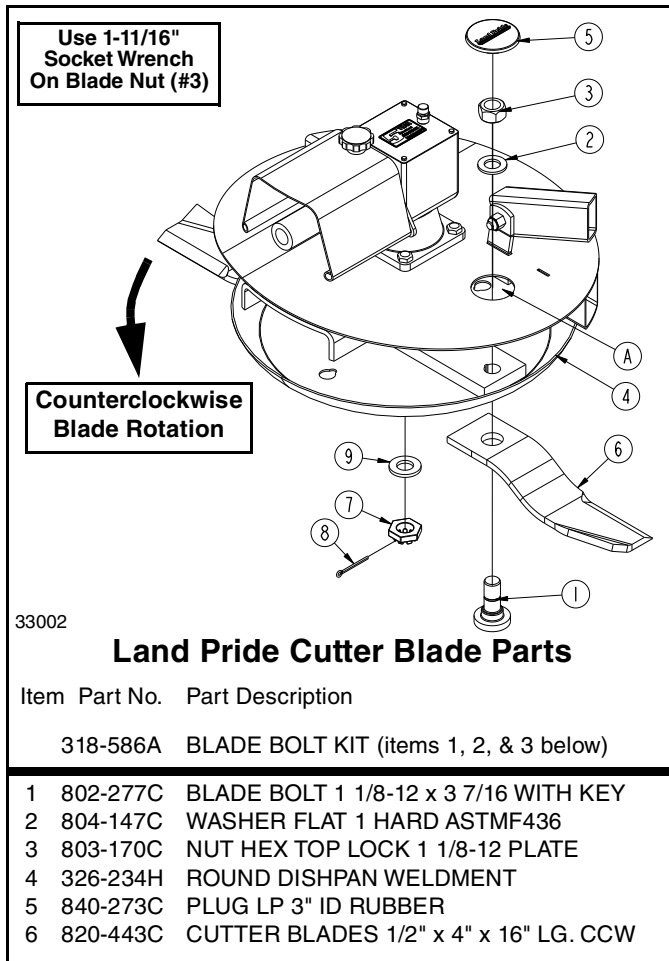

**Cutter Blade Assembly**  
**Figure 5-1**

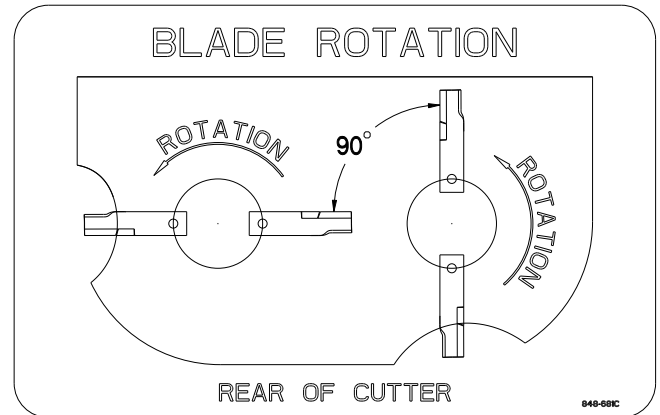

**Blade Rotation & Timing**  
**Figure 5-2**

**Refer to Figure 5-2 on page 27:**

- Make certain when installing cutter blades that the blades on one spindle is positioned 90 degrees to the blades on the other spindle as shown in Figure 5-2.
- Carefully check cutting edges of blades in relation to blade rotation to ensure correct blade placement. Blade rotation is counterclockwise with cutting edge leading. See Figure 5-2 on page 27. Airfoil (lift) must be oriented towards the top of the deck.

### **WARNING**

*To avoid serious injury or death:*

*A locknut that has been removed can lose its thread locking properties. Reusing a used locknut can result in a thrown blade. Always use a new locknut when installing blades.*

**IMPORTANT:** Examine blade bolts (#1) and flat washers (#2) for excessive wear and replace if worn.

- Insert blade bolt (#1) through blade (#6), dish pan (#4), and flat washer (#2). Secure blade with a **new locknut (#3)** and torque to 450 ft-lbs.
- Repeat step 11 for the other blade.
- Replace access cover (#5).
- If replacing dishpan (#4), castle nut (#7) on gearbox output shaft should be torqued to 450 ft-lbs. minimum and secured with cotter pin (#8) with both legs bent opposite directions around the nut.


### **Flex Coupler & Blade Timing**

**Refer to Figure 5-3 on page 28:**

If rubber discs (#7) are wrinkled, the blades may be out of time and hit each other. Replace rubber disc if blades hit. Follow instructions below when replacing rubber discs and when adjusting blade timing.

**IMPORTANT:** See Figure 5-2. Cutter blades must be 90 deg. to each other to be in time or blades will contact each other when hitting solid objects such as tree stumps, rocks and earth.

**IMPORTANT:** Through use or hitting solid objects, rubber discs can become worn causing blades to be out of time. Replace worn rubber Discs.

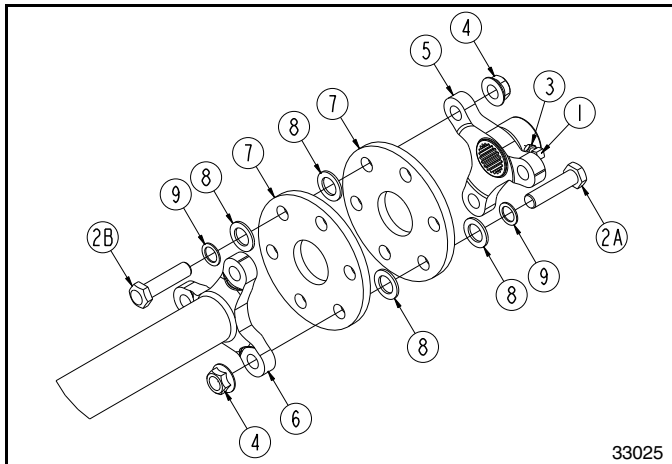

**Flex Coupler Assembly**  
**Figure 5-3**

1. Unbolt/remove rubber discs (#7) from flex coupler. Keep rubber discs that are in good shape and replace them if they are wrinkled excessively.
2. Loosen jam nut (#3) and set screw (#1). Slide spider (#5) off main gearbox output shaft.
3. Rotate cutter blades until blades on the left dishpan are 90° to blades on the right dishpan.
4. Hold blades 90° apart. Center spider lugs (#5) between spider tube lugs (#6) and push spider (#5) onto main gearbox output shaft.
5. Attach rubber discs (#7) to spider tube lugs (#6) with existing bolts (#2A), washers (#9), bushing (#8), and hex flange locknuts (#4) as shown. Do not tighten.
6. Attach rubber discs (#7) to spider lugs (#5) with existing bolts (#2B), washers (#9), bushing (#8), and hex flange locknuts (#4) as shown. Do not tighten.
7. Tighten nuts (#4) evenly until rubber disc (#7) touch each other at each bolt location. Bushings (#8) should be compressed halfway into the rubber discs.

## Driveline Protection

The drive-train is protected from shock loads with a four plate slip-clutch. The slip-clutch must be capable of slippage during operation. Always do a "clutch run-in" operation at the beginning of each season and after long periods of inactivity to remove any oxidation that may have accumulated on the friction surfaces. Repeat "clutch run-in" instructions when moisture and/or condensation seizes the inner friction plates.

## WARNING


*To avoid serious injury or death:*

*Always place tractor in park or set park brake, disengage power take-off, shut tractor engine off, remove ignition key, and wait for all moving parts to stop before dismounting tractor.*

## Clutch Run-In

**Refer to Refer to Figure 5-4:**

1. Using a pencil or other marker, scribe a line across the exposed edges of the clutch plates and friction discs.

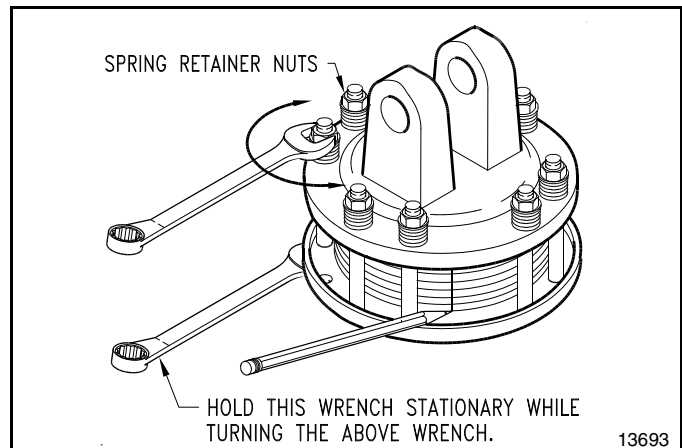

**Clutch**  
**Figure 5-4**

2. Carefully loosen each of the 8 spring retainer nuts by exactly 2 revolutions. It will be necessary to hold hex end of retainer bolt in order to count the exact number of revolutions.
3. Start tractor and engage power take-off drive for 2-3 seconds to permit slippage of the clutch surfaces. Disengage power take-off, then re-engage a second time for 2-3 seconds. Disengage power take-off, shut off tractor, and remove key. Wait for all components to stop before dismounting from tractor.
4. Inspect clutch and ensure that the scribed markings made on the clutch plates have changed position. Slippage has not occurred if any two marks on the friction disc and plate are still aligned. A clutch that has not slipped must be disassembled to separate the friction disc plates. See "**Clutch Assembly and Disassembly**" on page 29.
5. Tighten each of the 8 spring retainer nuts on the clutch housing exactly 2 revolutions to restore the clutch to the original setting pressure.
6. The clutch should be checked during the first hour of cutting and periodically each week. An additional set of scribe marks can be added to check for slippage.



See Figure 5-6 to adjust spring length.

### Clutch Assembly and Disassembly

#### Disassembly

Refer to Figure 5-5:

**IMPORTANT:** Refer to Figure 5-6. Be Sure to measure and record length ("A") of each clutch spring before disassembling the clutch.

See **IMPORTANT NOTE** above before disassembling clutch. After measuring and recording each spring length, remove spring retainer nuts (#1), springs (#2), and bolts (#3). Each friction disc (#4) must then be separated from the metal surface adjacent to it. Refer to the Parts Manual for a detailed parts breakdown.


#### Inspection

Inspect all parts for excessive wear and condition. Clean all parts that do not require replacement. The original friction disc thickness is 1/8" (3.2mm) and should be replaced if thickness falls below 3/64" (1.1mm). If clutches have been slipped to the point of "smoking", the friction discs may be damaged and should be replaced. Heat build-up may also affect the yoke joints.


#### Assembly

Refer to Figure 5-5 & Figure 5-6:

Reassemble each friction disc (#4) next to the metal plate it was separated from. Install bolts (#3) through the end plates and intermediate plates as shown. Place springs (#2) over bolts (#3) and secure with nuts (#1). Progressively tighten each spring retainer bolt until correct spring height "A" dimension is obtained.

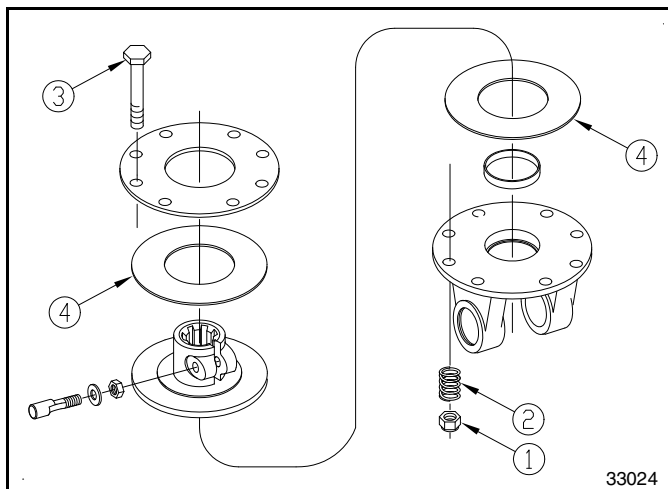

**Clutch Disassembly**  
Figure 5-5

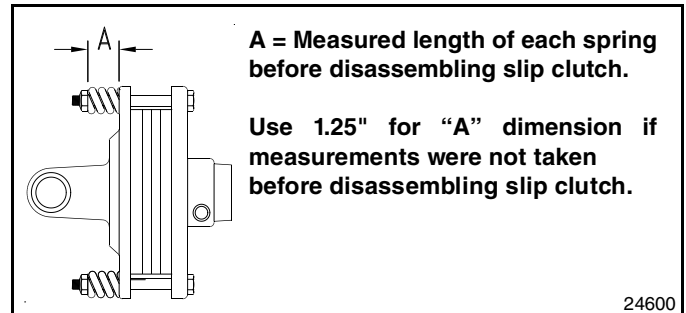

**Clutch Adjustment**  
Figure 5-6

### Skid Shoe Maintenance (Accessory)

Refer to Figure 5-7:


#### WARNING

To avoid serious injury or death:

Excessive wear on skid shoes can damage side panels, cause inadequate operation of cutter, and create a safety hazard. Always replace skid shoes at the first sign of wearing thin.

If the accessory skid shoes are mounted on the cutter side skirts, check them for wear and replace as needed. Order only genuine Land Pride parts from your local Land Pride dealer.

1. Remove 3/8" hex whiz nuts (#3), flat washers (#4), 3/8" plow bolts (#2), and skid shoes (#1) as shown.
2. Check plow bolts for wear and replaced if necessary.
3. Attach new skid shoes (#1) to cutter with existing 3/8" plow bolts (#2), flat washers (#4), and 3/8" hex whiz nuts (#3). Tighten nuts to the correct torque.

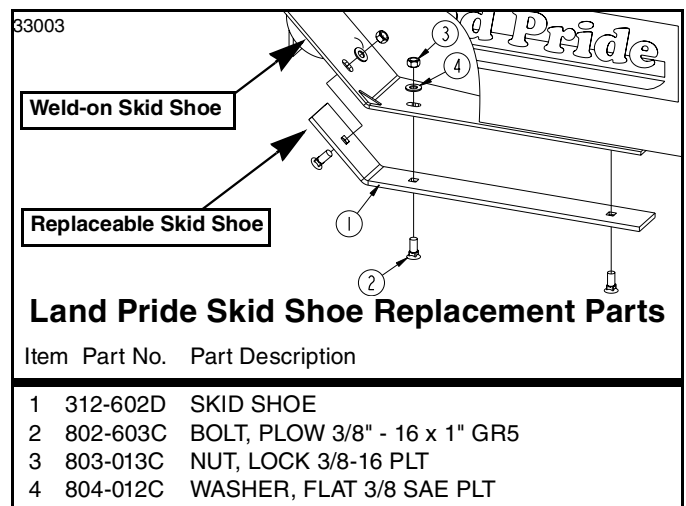

**Skid Shoe Accessory**  
Figure 5-7

## Long Term Storage

Clean, inspect, service, and make necessary repairs to the implement when storing it for long periods and at the end of the season. This will help ensure the unit is ready for field use the next time you hook-up to it.

### DANGER

To avoid serious injury or death:

- Always disconnect driveline from power take-off shaft before servicing drivetrain and cutter blades. The power take-off can be engaged if tractor is started.
- Always secure equipment with solid, non-concrete supports before working under it. Never go under equipment supported by concrete blocks or hydraulics. Concrete can break, hydraulic lines can burst, and/or hydraulic controls can be actuated even when power to hydraulics is off.

### CAUTION

To avoid minor or moderate injury:

Always store cutter with 3-point hitch pivoted back as far as possible. The floating 3-point hitch when not hooked to a tractor can fall backwards unexpectedly causing bodily injury.

1. Clean off any dirt and grease that may have accumulated on the cutter and moving parts. Scrape off compacted dirt from the bottom of deck and then wash surface thoroughly with a garden hose. A coating of oil may also be applied to the lower deck area to minimize oxidation.
2. Check blades and blade mounting hardware for wear. Replace blades and hardware as needed. See “**Cutter Blade Maintenance**” on page 26.
3. Inspect for loose, damaged, or worn parts and adjust or replace as needed.
4. Repaint parts where paint is worn or scratched to prevent rust. Ask your dealer for Land Pride aerosol touch-up paint. They are also available in touch-up bottles with brush, quarts, and gallon sizes by adding TU, QT, or GL to the end of the aerosol part number. Replace all damaged or missing decals.

#### Land Pride Aerosol Touch-up Paint

Part No.	Part Description
821-011C	PAINT LP BEIGE SPRAY CAN
821-054C	PAINT MEDIUM RED SPRAY CAN
821-058C	PAINT GREEN SPRAY CAN
821-066C	PAINT ORANGE SPRAY CAN
821-070C	PAINT GP GLOSS BLACK SPRAY CAN

5. Lubricate unit. See “**Lubrication**” on page 31.
6. Store cutter on a level surface in a clean, dry place. Inside storage will reduce maintenance and make for a longer cutter life.
7. Follow all unhooking instructions on page 25 when disconnecting tractor from cutter.

## Ordering Replacement Parts


Land Pride offers equipment in factory standard beige with black highlights. Equipment may also be purchased in Green, Red or Orange. Special attention must be given to the part number to prevent ordering the wrong color. A suffix number corresponding to one of the colors below must be added at the end of the part number. Parts ordered without the suffix number will be supplied in factory standard colors.

81	.....	Green	83	.....	Red
82	.....	Orange	85	.....	Black

For example, if you are ordering a replacement part with part number 555-555C and the existing part is red, then add the suffix 83 to the end of the number to make the part number read 555-555C83.

### Lubrication

#### Lubrication Legend



Multi-purpose  
spray lube





Multi-purpose  
grease lube



Multi-purpose  
oil lube





Intervals in hours at which  
lubrication is required

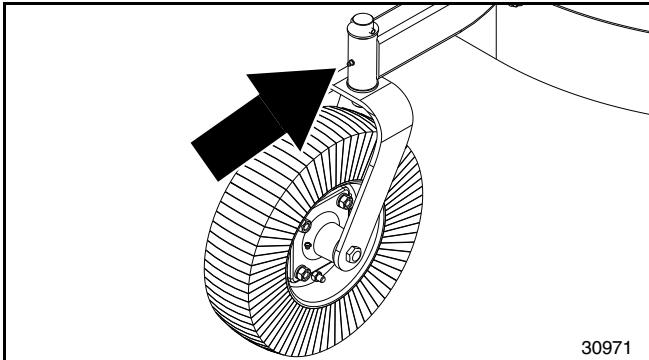

#### Gauge Wheel Spindle Tube

Type of Lubrication: Grease


Quantity = 6 pumps

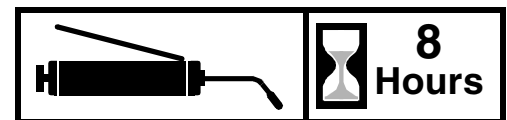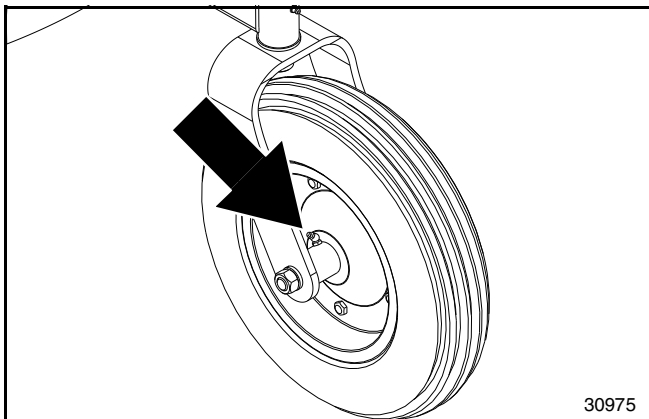


#### Gauge Wheel Hub

Type of Lubrication: Multi-purpose Grease

Quantity = 2 pumps

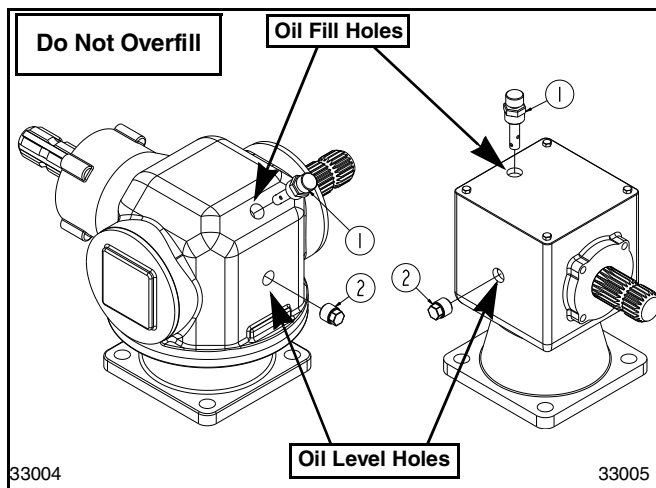

**NOTE:** Use a suction or siphon pump to drain gearboxes of oil when there is not an oil drain plug.





#### Gearbox

**NOTE:** Do not overfill! Cutter should be level when checking oil. Oil expands when hot, therefore, always check oil level when cold.

1. Remove side oil level plug (#2) to check oil level. Oil should be level with bottom of oil level hole.
2. If oil is below bottom of oil level hole, remove vented breather plug (#1) and add recommended gear lube through oil fill hole until oil flows out of oil level hole.
3. Reinstall and tighten oil level plug (#2) and vented breather plug (#1).
4. Repeat steps 1 to 3 above for the other gearbox.

Type of Lubrication: 80-90W EP Gear Lube



Quantity = Fill with oil until oil is level with bottom of oil level hole. (Oil should just start to flow out the oil level hole.)

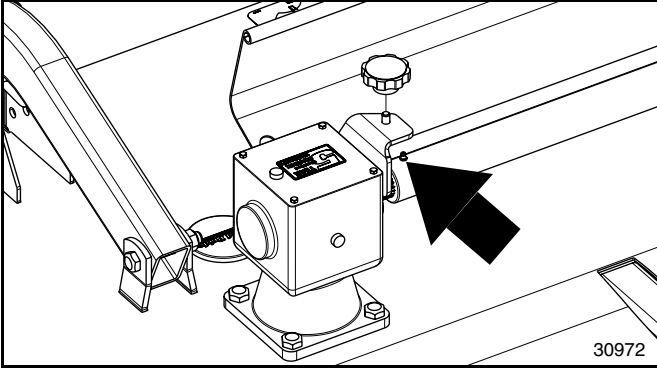

### Flex Coupling Shaft

Type of Lubrication: Multi-purpose Grease



Quantity = 6 pumps

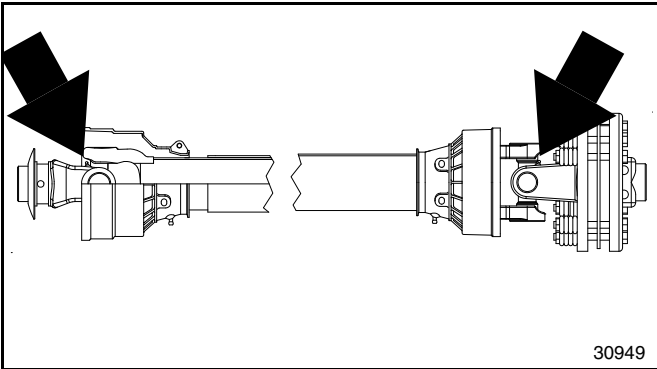

### Driveline U-Joints

Type of Lubrication: Multi-purpose Grease



Quantity = 6 pumps

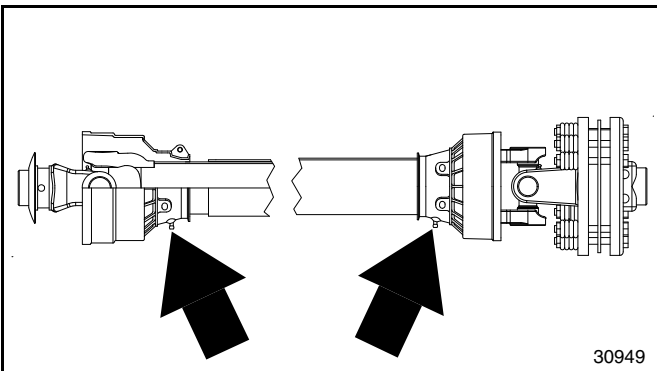

### Driveline Shield Bearings

Type of Lubrication: Multi-purpose Grease

Quantity = 6 pumps

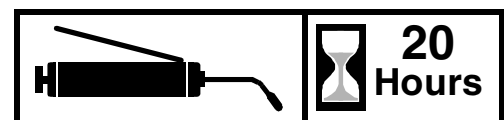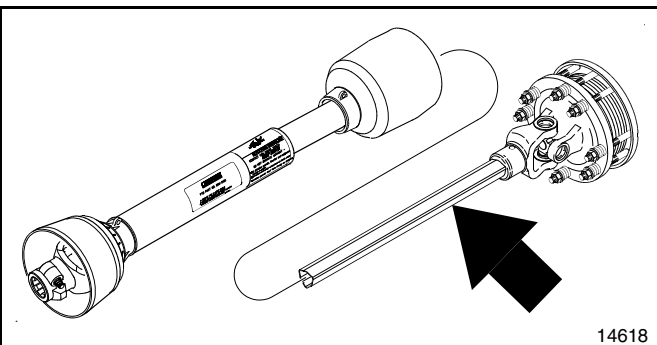

### Driveline Profiles



**Type of Lubrication: Multi-purpose Grease**

Quantity = Clean & coat inner tube of driveline with a light film of grease and then reassemble.



### RCD1884 Model

Specifications & Capacities	
<b>Machine Weight with</b> <b>Dual Laminated Tailwheels</b> <b>Dual Solid Tailwheels</b>	900 lbs. 905 lbs.
<b>Hitch</b>	Category I with clevis type lower links and floating top linkage Quick Hitch adaptable
<b>Cutting Width</b>	84"
<b>Overall Width</b>	86 9/16"
<b>Overall Length</b>	80 9/16"
<b>Offset Distance to the Right</b>	10"
<b>Deck Height at Rear</b>	11 5/8"
<b>Cutting Height</b>	2" - 12"
<b>Cutting Capacity</b>	1 1/2" Diameter
<b>Recommended Tractor Power Take-Off Horsepower</b>	35-60 horsepower
<b>Power Take-Off Speed</b>	540 rpm
<b>Gearbox</b>	60 Hp main gearbox & 45 horsepower side gearbox With speed-up beveled gears, cast iron housing, and 1.67" output shaft
<b>Gearbox Lubricant</b>	EP 80-90W oil
<b>Gearbox oil Capacity</b> <b>Main Gearbox</b> <b>Side Gearbox</b>	4.7 pints 3.5 pints
<b>Deck Construction</b>	All welded deck
<b>Deck Material Thickness</b>	10 Gauge
<b>Side Skirt Material Thickness</b>	10 Gauge
<b>Skid Shoe Construction</b>	3/16" Weld-on with mounting holes for adding optional bolt-on replaceable shoes
<b>Stump Jumper</b>	10 Gauge x 24" Round dish pan with 1" x 4" x 19 1/2" blade bar
<b>Blades (4)</b>	1/2" x 4" x 16" Heat treated alloy steel free-swinging suction blades
<b>Blade Overlap</b>	5"
<b>Blade Bolts</b>	Keyed with harden flat washers & locknuts.
<b>Blade Tip Speed</b>	11,693 fpm
<b>Main Driveline</b>	ASAE Category 3
<b>Main Driveline Protection</b>	2 plate slip clutch
<b>Tailwheel Mount</b>	Caster fork with 360 degree swivel
<b>Tailwheel</b>	Optional two 15" laminated tire or two 4" x 16" molded rubber tire.
<b>Front Guard</b>	Optional 4" x 6" molded rubber or single chain guard
<b>Rear Guard</b>	Standard metal band or optional metal extended guard

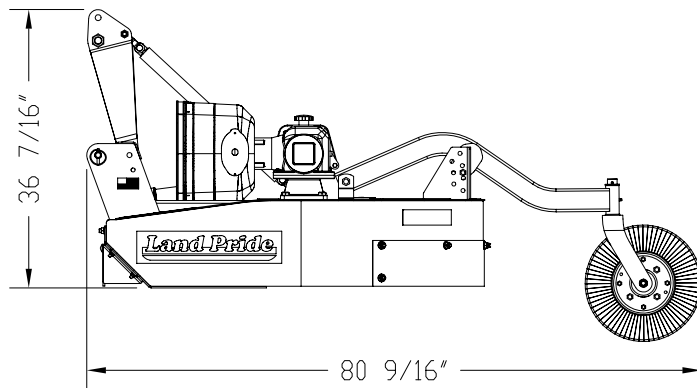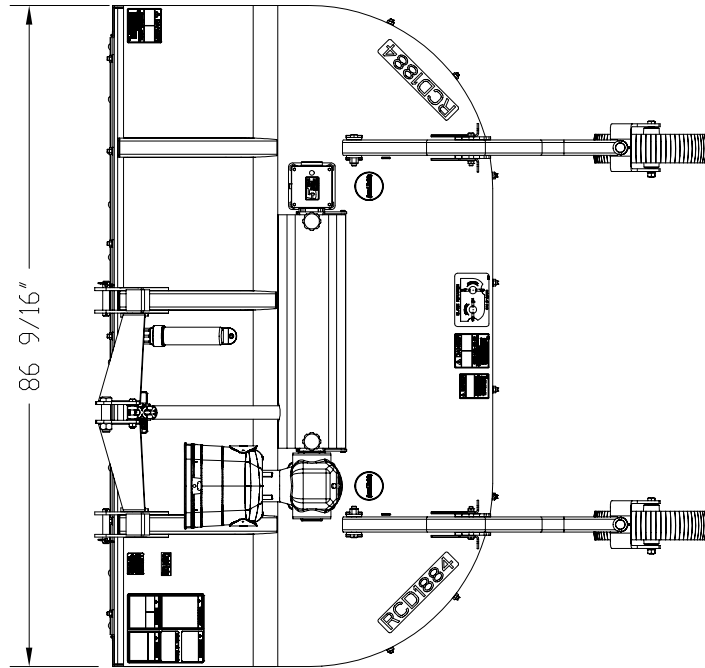







30973

### RCD1884 Model

Features	Benefits
<b>Surpassed rugged industry standards</b>	All Land Pride Cutters have been designed and tested and meet rigorous voluntary testing procedures specified by ANSI.
<b>5 Year gearbox warranty</b>	Shows our confidence in the gearbox integrity.
<b>Gearbox Seal Protection</b>	Gearbox bottom seal protection for longer bearing life.
<b>Cat. 3 main driveline with 2-plate slip-clutch</b>	2-Plate slip-clutch protect driveline and gearboxes. slip-clutch is more convenient than shear bolt for continual work.
<b>Shock absorbing flex-coupler between main and side gearboxes</b>	Protects intermediate drive shaft and side gearbox from hard objects in the blade path.
<b>10" Deck offset to the right</b>	Allows the operator to cut closer to bodies of water, drainage ditches, roadways and objects such as fence lines, guard rails, buildings, and trees.
<b>Lower clevis type 3-Point hitch</b>	Allows for ease of hook-up to tractor. Also adds additional strength allowing for an even pull from the tractor's lower arms, vs. pulling on a single pin design.
<b>Smooth deck top</b>	Reduces accumulation of debris and is easier and faster to clean.
<b>Fully welded 10 gauge deck</b>	Fully welded deck adds additional strength to the deck. 10 Gauge decks can withstand more abuse than decks with lighter gauge.
<b>Box tubing deck supports</b>	Makes for a stronger rigid deck.
<b>Round back design</b>	Helps discharge grass better than enclosed or partially enclosed cutters.
<b>11 5/8" Deck Height</b>	Allows cutter to handle heavy cutting conditions.
<b>1 1/2" to 12" Cutting height</b>	Provides for a wide range of cutting conditions.
<b>Skid shoes</b>	Provides sidewall reinforcement and protection to bottom of sidewall.
<b>1/2" x 4" Heat-treated free swinging blades</b>	Free swinging protects from obstructions. Heat-treated offers longer life.
<b>1/2" x 4" Blade bar</b>	Heavy-duty blade bar adds support to stump jumper and gearbox output shaft.
<b>Splined blade bar hub</b>	Allows for tight positive fit of stump jumper and blade bar to gearbox output shaft.
<b>Stump jumper</b>	Standard round stump jumper slides over stumps, rocks, and debris.
<b>Front and rear guarding</b>	Protect against flying debris. Optional front rubber or single chain guarding. Standard rear metal band or optional rear extended metal guarding.
<b>Optional 15" Laminated tailwheel 4" x 16' Molded rubber</b>	Laminated material is long lasting in rough conditions and can't go flat. Can't go flat.

### Troubleshooting Chart

Problem	Cause	Solution
<b>Oil seal leaking</b>	Gearbox overfilled	Drain to side plug hole
	Seals damaged	Replace seals
	Grass or wire wrapped on shaft in seal area	Check seal areas daily
<b>Driveline yoke or cross failing</b>	Shock load	Avoid hitting solid objects
	Needs lubrication	Lubricate every 8 hours
<b>Driveline clutch is slipping</b>	Scalping the ground	Raise cutting height
	Cutting too fast	Reduce travel speed
	power take-off being engaged too fast at high engine rpm	Slowly engage power take-off at low engine rpm
	Cutting over solid objects	Avoid solid objects
<b>Bent Driveline (NOTE: driveline should be repaired or replaced if bent)</b>	Contacting frame	Reduce lift height in transport position
	Contacting drawbar	Reposition drawbar
	Bottoming out	Shorten driveline
	Binding up	Not lubricating enough
<b>Driveline telescoping tube failing</b>	Shock load	Avoid hitting solid objects
<b>Driveline telescoping tube wearing</b>	Needs lubrication	Lubricate every 20 hours
<b>Blades Lock-up</b>	Tractor has instant on power take-off	Engage power take-off at low rpms and then slowly increase engine speed to full power take-off speed. See Blade Engagement on page 24.
	Tractor has Instant off power take-off	Decrease engine speed slowly to an idle and then disengage power take-off. See Blade Disengagement on page 24.
<b>Blades wearing excessively</b>	Cutting on sandy ground	Raise cutting height
	Contacting ground frequently	Raise cutting height
<b>Blades breaking</b>	Hitting solid objects	Avoid hitting solid objects
<b>Blades coming loose</b>	Blades not tightened properly	Tighten blade hardware (refer to "Cutter Blade Maintenance" on page 26)
	Improper deck attitude	Lower front of deck, see page 21
<b>Blade carrier becomes loose</b>	Running loose in the past	Replace gearbox output shaft and blade carrier
	Blade carrier hardware not tight enough	Tighten to specified torque
<b>Blade bolt holes worn</b>	Blade hardware running loose	Replace blades and blade bolts if worn
<b>Blade carrier bent</b>	Hitting solid objects	Avoid hitting solid objects and replace blade carrier
<b>Excessive side skid wear</b>	Cutting height not level	Adjust cutter height
	Soil abrasive	Adjust cutter height
	Cutting too low	Adjust cutter height
<b>Tailwheel support failing</b>	Lowering too fast	Adjust rate of drop
	Hitting objects when turning	Reduce speed on turns
<b>Excessive vibration</b>	Driveline bent	Replace driveline
	Blades loose	Tighten blade bolts
	Blade carrier bent	Replace blade carrier
	Blade broken	Replace blade
	Blade will not swing	Remove and inspect blade

Torque Values Chart for Common Bolt Sizes													
Bolt Size (inches)	Bolt Head Identification						Bolt Size (Metric)	Bolt Head Identification					
													
in-tpi <sup>1</sup>	N · m <sup>2</sup>	ft-lb <sup>3</sup>	N · m	ft-lb	N · m	ft-lb	mm x pitch <sup>4</sup>	N · m	ft-lb	N · m	ft-lb	N · m	ft-lb
1/4" - 20	7.4	5.6	11	8	16	12	M 5 X 0.8	4	3	6	5	9	7
1/4" - 28	8.5	6	13	10	18	14	M 6 X 1	7	5	11	8	15	11
5/16" - 18	15	11	24	17	33	25	M 8 X 1.25	17	12	26	19	36	27
5/16" - 24	17	13	26	19	37	27	M 8 X 1	18	13	28	21	39	29
3/8" - 16	27	20	42	31	59	44	M10 X 1.5	33	24	52	39	72	53
3/8" - 24	31	22	47	35	67	49	M10 X 0.75	39	29	61	45	85	62
7/16" - 14	43	32	67	49	95	70	M12 X 1.75	58	42	91	67	125	93
7/16" - 20	49	36	75	55	105	78	M12 X 1.5	60	44	95	70	130	97
1/2" - 13	66	49	105	76	145	105	M12 X 1	90	66	105	77	145	105
1/2" - 20	75	55	115	85	165	120	M14 X 2	92	68	145	105	200	150
9/16" - 12	95	70	150	110	210	155	M14 X 1.5	99	73	155	115	215	160
9/16" - 18	105	79	165	120	235	170	M16 X 2	145	105	225	165	315	230
5/8" - 11	130	97	205	150	285	210	M16 X 1.5	155	115	240	180	335	245
5/8" - 18	150	110	230	170	325	240	M18 X 2.5	195	145	310	230	405	300
3/4" - 10	235	170	360	265	510	375	M18 X 1.5	220	165	350	260	485	355
3/4" - 16	260	190	405	295	570	420	M20 X 2.5	280	205	440	325	610	450
7/8" - 9	225	165	585	430	820	605	M20 X 1.5	310	230	650	480	900	665
7/8" - 14	250	185	640	475	905	670	M24 X 3	480	355	760	560	1050	780
1" - 8	340	250	875	645	1230	910	M24 X 2	525	390	830	610	1150	845
1" - 12	370	275	955	705	1350	995	M30 X 3.5	960	705	1510	1120	2100	1550
1-1/8" - 7	480	355	1080	795	1750	1290	M30 X 2	1060	785	1680	1240	2320	1710
1-1/8" - 12	540	395	1210	890	1960	1440	M36 X 3.5	1730	1270	2650	1950	3660	2700
1-1/4" - 7	680	500	1520	1120	2460	1820	M36 X 2	1880	1380	2960	2190	4100	3220
1-1/4" - 12	750	555	1680	1240	2730	2010	<sup>1</sup> in-tpi = nominal thread diameter in inches-threads per inch <sup>2</sup> N · m = newton-meters <sup>3</sup> ft-lb= foot pounds <sup>4</sup> mm x pitch = nominal thread diameter in millimeters x thread pitch						
1-3/8" - 6	890	655	1990	1470	3230	2380							
1-3/8" - 12	1010	745	2270	1670	3680	2710							
1-1/2" - 6	1180	870	2640	1950	4290	3160							
1-1/2" - 12	1330	980	2970	2190	4820	3560							
Torque tolerance + 0%, -15% of torquing values. Unless otherwise specified use torque values listed above.													
Additional Torque Values													
1" Quick Hitch Bolt & Top Lock Nut			400 to 450 ft-lbs										
Blade Carrier Hub Nut			450 ft-lbs Minimum										
Blade Bolt Lock Nut			450 ft-lbs										





## Warranty

**Land Pride** warrants to the original purchaser that this Land Pride product will be free from defects in material and workmanship beginning on the date of purchase by the end user according to the following schedule when used as intended and under normal service and conditions for personal use.

**Overall Unit and Driveline:** One year Parts and Labor

**Gearbox:** 5 years Parts and Labor

**Blades, tires and driveline friction discs:** Considered wear items

This Warranty is limited to the repair or replacement of any defective part by Land Pride and the installation by the dealer of any such replacement part, and does not cover common wear items. Land Pride reserves the right to inspect any equipment or parts which are claimed to have been defective in material or workmanship.

This Warranty does not apply to any part or product which in Land Pride's judgment shall have been misused or damaged by accident or lack of normal maintenance or care, or which has been repaired or altered in a way which adversely affects its performance or reliability, or which has been used for a purpose for which the product is not designed. Misuse also specifically includes failure to properly maintain oil levels, grease points, and driveline shafts.

Claims under this Warranty should be made to the dealer which originally sold the product and all warranty adjustments must be made through an authorized Land Pride dealer. Land Pride reserves the right to make changes in materials or design of the product at any time without notice.

This Warranty shall not be interpreted to render Land Pride liable for damages of any kind, direct, consequential, or contingent to property. Furthermore, Land Pride shall not be liable for damages resulting from any cause beyond its reasonable control. This Warranty does not extend to loss of crops, any expense or loss for labor, supplies, rental machinery or for any other reason.

**No other warranty of any kind whatsoever, express or implied, is made with respect to this sale; and all implied warranties of merchantability and fitness for a particular purpose which exceed the obligations set forth in this written warranty are hereby disclaimed and excluded from this sale.**

This Warranty is not valid unless registered with Land Pride within 30 days from the date of original purchase. Registration is done by your dealer.

**IMPORTANT:** The Online Warranty Registration should be completed by the dealer at the time of purchase. This information is necessary to provide you with quality customer service.

**Model Number** \_\_\_\_\_

**Serial Number** \_\_\_\_\_



Corporate Office: P.O. Box 5060  
Salina, Kansas 67402-5060 USA  
[www.landpride.com](http://www.landpride.com)

---