RCP27/37 SERIES PARALLEL ARM ROTARY CUTTERS

HP REQUIRED	CUTTING CAPACITY	HITCH
75 HP Min. 95 HP Min.	2"	Cat. 2 & 3

Hydraulic driven Parallel Arm Rotary Cutter.

Designed to “reach out” and cut along roadsides, over guard rails, down ditchbanks, and next to ponds, Land Pride’s RCP27 and RCP37 have features that make our Parallel Arm Rotary Cutters unique.

First of all, it has a constant attitude! When the two cylinders that operate the two arm sections are activated, the attitude of the deck does not change; thanks to the parallel arm design. Lift the cutter head up, in or out to negotiate an obstacle, and your cutter deck position does not change; set the cutter head down at the same attitude as it was prior to the obstacle. This makes your work efficient!

The hydraulic breakaway feature of the RCP Series pivots the arm backward to avoid obstacles and protect the cutter arm. The cutter deck is restored to its original position with the help of a hydraulic cylinder. The cutter deck can also swing rearward enabling you to mow into a tight corner, again putting it back to its original setting with the hydraulic cylinder.

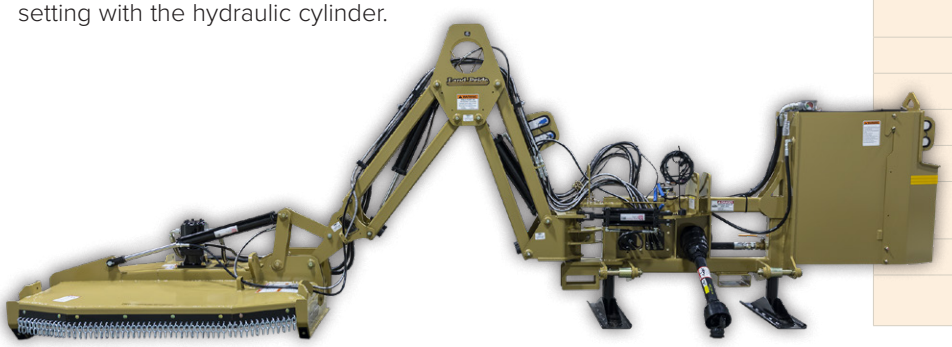

	RCP2760	RCP3760
Horsepower	75 HP Min. (55.9kW)	95 HP Min. (70.8 kW)
Hitch	Cat. 2 & 3	
Working Width (cm)	58" (147)	
Min. Transport Width	10'1"	
Min. Tractor Weight - lb (kg) w/o added weights	8,000 (3,629)	12,000 (5,443)
Hydraulic Pump Input	540 RPM or 1000 RPM	
Hydraulic Oil Capacity	40 Gallons	
Hydraulic Oil Flow	15 GPM	
Overload Protection	Relief Valve	
Oil Cleansing	Return Line Filter, Replaceable	
Oil Check	Site Glass	
Min. Cutting Height (cm)	2" (5)	
Cutting Capacity (cm)	2" (5) Diameter	
Horizontal Cutting Reach (from center tractor)	15'6" Maximum	18'10" Maximum
Vertical Cutting Reach	11'5" Maximum	13'5" Maximum
Below Ground Level Reach	9'1" Maximum	11' Maximum
Operating Tilt Arc	180°	
Deck Thickness	10 Gauge	
Safety Guards	Front and Rear Chain Guards	
Blades	2 Each, 1/2" x 4"	
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut	
Blade Tip Speed	15,000 fpm	
Blade Rotation	Clockwise	
Dishpan	3/16" x 21" Round, Dish Shaped	
Driveline	Cat. 2	
Storage	2 Parking Stands	
Ballast Weight	850 lbs Built-in	
Unit Protection	Tension Bolt and Hydraulic Breakaway Cylinder	
Options	Debris Guard Gauge Wheels	
Transport Lights	Standard	
Color		

QUICK HITCH SYSTEM

*See dealer for complete warranty information. ^Based on field performance.